Occupational Safety and Health Standards Board

Public and Business Meeting

Meeting Agenda

Prepared by the Department of Industrial Relations
Available on the DIR web page: Standards Board (OSHSB) 2026 Meeting Schedule

OCCUPATIONAL SAFETY
AND HEALTH STANDARDS BOARD
2520 Venture Oaks Way, Suite 350
Sacramento, CA 95833
(916) 274-5721
www.dir.ca.gov/oshsb

MISSION STATEMENT

The mission of the Occupational Safety and Health Standards Board is to promote, adopt, and maintain reasonable and enforceable standards that will ensure a safe and healthy workplace for California workers.

AGENDA

OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD MEETING

October 15, 2026
10:00 a.m.

In-Person:

San Diego County Administration Center
Room 310
1600 Pacific Highway
San Diego, CA 92101

Videoconference:

1. Go to https://tkoworks.zoom.us/j/87501250331
2. Enter Webinar ID: 875 0125 0331
3. Join the meeting through the Zoom application OR through your web browser
4. Videoconference will be opened to the public at 9:50 a.m.

Teleconference:

1. Dial 1 (669) 444-9171
2. Enter Webinar ID: 875 0125 0331 and follow the prompts
3. Teleconference will be opened to the public at 9:50 a.m.

Live video stream and audio stream (English and Spanish):

1. Go to https://videobookcase.com/california/oshsb/
2. Video stream and audio stream will launch as the meeting starts at 10:00 a.m.

Public Comment Queue:
If attending the Occupational Safety and Health Standards Board (Board) meeting in person, you will be added to the public comment queue upon completing a comment card on the day of the meeting using your real name or pseudonym.

If attending the meeting remotely and you wish to comment on agenda items, you may submit a request to be added to the public comment queue either in advance of or during the meeting through one of the following methods:

ONLINE: Provide your information through the online comment queue portal at https://videobookcase.org/oshsb/public-comment-queue-form/

PHONE: Call **(510) 868-2730** to access the automated comment queue voicemail and provide†: 1) your name as you would like it listed; 2) your affiliation or organization; and 3) the topic you would like to comment on.

† Information requested is voluntary and not required to address the Board.

I. CALL TO ORDER AND INTRODUCTIONS

A. Spanish translation instructions

II. REMARKS FROM THE CHAIR

III. BUSINESS MEETING

Note: The purpose of the Business Meeting is for the Board to conduct its monthly business. All matters on this agenda are subject to discussion and action as determined to be appropriate by the Board Chair. Items may be taken out of order.

There will be a public comment period before board action on each item, except for the Consent Calendar. Public comment will be limited to two minutes per speaker or four minutes for speakers requiring concurrent English translation.

A. PROPOSED SAFETY ORDERS FOR ADOPTION

1. TITLE 8: **ELEVATOR SAFETY ORDERS**
   Chapter 4, Subchapter 6
   Revisions to the Elevator Safety Orders

   - Briefing by Board staff on proposed regulation for adoption
   - Public comment on proposed regulation for adoption
   - Board discussion

B. PROPOSED PETITION DECISION FOR ADOPTION

1. Outdoor Power Equipment Institute, Inc. (OPEI)
   Petition 614

The Petitioner requests to amend Title 8, section 3563 Power Lawn Mowers, to revise and update references to various American National Standards Institute (ANSI) B71 and the Outdoor Power Equipment Institute (OPEI) standards that specify safety specifications for powered equipment used in turf care and maintenance. Those changes include replacing the reference in subsection 3563(a) to "applicable standards in clause (b) below" and move the reference to ANSI B71.1 or B71.4 to subsection 3563(b)(2). Additionally, OPEI requests amending all references to these ANSI consensus standards to be ANSI/OPEI where applicable and add new ANSI/OPEI and Underwriters Laboratories (UL) consensus standards. OPEI also requests the removal of subsection 3563(b)(3) because they believe this reference is outdated, provides no safety benefit, and is an undue burden to California's employers.

- Briefing by Board staff on proposed petition decision for adoption
- Public comment on proposed petition decision for adoption
- Board discussion

C. BAGLEY-KEENE GUIDANCE

- Briefing by staff on Bagley-Keene guidance on open meeting act
- Public comment
- Board discussion

D. PROPOSED VARIANCE DECISIONS FOR ADOPTION

- Consent Calendar
- Vote on consent calendar

E. REPORTS

- Executive Officer's Report
- Legislative Update
- Cal/OSHA Report
- State Response Subcommittee Report
- Public comment on reports

F. PUBLIC COMMENT ON NON-AGENDA ITEMS OR TO PROPOSE NEW OR REVISED STANDARDS

This portion of the meeting is open to any interested person proposing new or revised standards to the Board or commenting on occupational safety and health issues (Labor Code section 142.2) not on the agenda. The Board is prohibited from acting on or responding to items that are not noticed on the agenda but may refer items to staff for future consideration.

Public comment will be limited to two minutes per speaker or four minutes for speakers requiring concurrent English translation.

The Board encourages comments on occupational safety and health matters not included on the monthly agenda. If you have a comment and cannot attend during the non-agenda comment period, OSHSB staff will do their best to read emailed comments into the record. Please send your non-agenda comment to oshsb_nacomments@dir.ca.gov by 5:00 PM the day prior to the meeting. Your comment should be clear, concise and 500 words or less.

Any individual or group wanting to make a presentation during the Public

Meeting should visit https://www.dir.ca.gov/oshsb/presentations-for-oshsb.html for further information.

G. COMMENTS BY BOARD MEMBERS

Any Board member may identify a topic of interest during the Board meeting. However, the Board may not substantially discuss or act on any matter raised during the meeting that is not included on this agenda, except to decide to place the matter on the agenda of a future meeting. (GC sections 11125 & 11125.7(a).).

H. CLOSED SESSION

Pending Decisions (GC section 11126(c)(3))

- Permanent Variance No. 23-V-580 (Dragados)

Pending Litigation (GC section 11126(e)(1))

- Western States Petroleum Association (WSPA) v. California Occupational Safety and Health Standards Board (OSHSB), et al. United States District Court (Eastern District of California) Case No. 2:19-CV-01270

- WSPA v. OSHSB, et al., County of Sacramento, CA Superior Court Case No. 34-2019-00260210

I. RETURN TO OPEN SESSION

- Report from closed session

J. ADJOURNMENT OF THE MEETING

Next Meeting: November 19, 2026
Hilton Garden Inn Monterey
Big Sur Room
1000 Aguajito Road
Monterey, CA 93940
10:00 a.m.

ADDITIONAL INFORMATION

Public Hearing

In the event of a Public Hearing, members of the public may provide comments regarding standards that have been noticed to the public for a 45-day comment period. An individual wishing to comment must complete a speaker comment card. Efforts will be made to accommodate everyone who signs up to speak.

Each individual who submits a comment card will get up to two minutes to speak. The Board Chair may extend the speaking time allotted when practical.

Disability Accommodation Notice

Under Government Code section 11123(a), all meetings of a state body are open and public, and all persons are permitted to attend any meeting of a state body, except as otherwise provided in the Bagley-Keene Open Meeting Act.

If disability-related modifications or accommodations are required to participate in the meeting, please contact Sarah Waklee with the Diversity and Inclusion Office at DIO@DIR.CA.GOV. To ensure the availability of your requested accommodation, please submit your request at least five (5) days in advance.

Please contact the California Relay Service by dialing 711 or (800) 735-2929 (TTY) or (800) 855-3000 (TTY-Spanish).

Translation

Requests for translation services should be made no later than five (5) days before the meeting. Request may be made to by email to oshsb@dir.ca.gov.

For additional information regarding this agenda, please contact Millicent Robinette at 916-274-5721, oshsb@dir.ca.gov, or at our mailing address:

Occupational Safety and Health Standards Board
2520 Venture Oaks Way, Suite 350
Sacramento, CA 95833

The agenda is also available on our website at www.dir.ca.gov/oshsb and https://www.dir.ca.gov/oshsb/mtgsch.html.

CONSENT CALENDAR—PROPOSED VARIANCE DECISIONS
OCTOBER 15, 2026, MONTHLY BUSINESS MEETING
OF THE OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
PROPOSED DECISIONS FOR BOARD CONSIDERATION, HEARD ON SEPTEMBER 23, 2026

Docket Number	Applicant Name	Safety Order(s) at Issue	Proposed Decision Recommendation
1. 19-V-403M2	Pacific Urban Investors	ELEVATOR	GRANT
2. 24-V-216M1	Broadway Properties La Jolla LLC	ELEVATOR	GRANT
3. 24-V-460M1	Gable House Development, LLC	ELEVATOR	GRANT
4. 24-V-556M1	AvalonBay Communities, Inc.	ELEVATOR	GRANT
5. 25-V-115M1	BIG WAVE GROUP INC	ELEVATOR	GRANT
6. 25-V-362M1	UCSF Benioff Children's Hospital Oakland	ELEVATOR	GRANT
7. 25-V-388M1	Mirka Investment, LLC	ELEVATOR	GRANT
8. 25-V-395M1	Google, LLC	ELEVATOR	GRANT
9. 26-V-183M1	292 Barham, LLC	ELEVATOR	GRANT
10. 26-V-321M1	Board of Trustees of the California State University	ELEVATOR	GRANT
11. 26-V-412	Pacific West Communities	ELEVATOR	GRANT
12. 26-V-417	Farmersville Gardenia Senior Associates, LP	ELEVATOR	GRANT
13. 26-V-418	Fontana Unified School District	ELEVATOR	GRANT
14. 26-V-419	447 Burchett Street LLC	ELEVATOR	GRANT
15. 26-V-420	Kingsley Project LLC	ELEVATOR	GRANT
16. 26-V-421	1723 Corinth LP	ELEVATOR	GRANT
17. 26-V-422	2800 Telegraph Partners LLC	ELEVATOR	GRANT
18. 26-V-423	Sutter Bay Hospitals	ELEVATOR	GRANT
19. 26-V-424	Park Place San Mateo Owner, LP	ELEVATOR	GRANT

Docket Number	Applicant Name	Safety Order(s) at Issue	Proposed Decision Recommendation
20. 26-V-425	Tampa Sherman, LP	ELEVATOR	GRANT
21. 26-V-426	Raul F. Hernandez	ELEVATOR	GRANT
22. 26-V-427	Milibrae MF Owner LLC	ELEVATOR	GRANT
23. 26-V-428	Thornton Affordable Housing, L.P.	ELEVATOR	GRANT
24. 26-V-429	Penn Valley Pacific Associates II, A California Limited Partnership	ELEVATOR	GRANT
25. 26-V-430	Trillium Senior Apartments LP	ELEVATOR	GRANT
26. 26-V-431	State & Laurel, LLC	ELEVATOR	GRANT
27. 26-V-432	Burbank-Glendale-Pasadena Airport Authority	ELEVATOR	GRANT
28. 26-V-433	Project Oak Hill, LLC	ELEVATOR	GRANT
29. 26-V-434	San Jose Trimble Associates, A California Limited Partnership	ELEVATOR	GRANT
30. 26-V-435	San Rafael Multifamily LLC	ELEVATOR	GRANT
31. 26-V-436	Soquel Pacific Associates, A Limited Partnership	ELEVATOR	GRANT
32. 26-V-437	Virginia College Associates LP	ELEVATOR	GRANT
33. 26-V-438	San Diego Unified School District	ELEVATOR	GRANT
34. 26-V-439	Savannah Four, LLC	ELEVATOR	GRANT
35. 26-V-441	304 E. Spruce St LP	ELEVATOR	GRANT
36. 26-V-443	Napa Vallejo Waste Management Authority	ELEVATOR	GRANT
37. 26-V-444	Los Angeles World Airports (LAWA)	ELEVATOR	GRANT
38. 26-V-445	Essex Portfolio L.P.	ELEVATOR	GRANT
39. 26-V-446	Center for the Art of Translation	ELEVATOR	GRANT
40. 26-V-447	1101 Sutter Affordable, LP	ELEVATOR	GRANT
41. 26-V-448	Pac Avenue, L.P.	ELEVATOR	GRANT
42. 26-V-449	MP Lazuli Landing Associates, L.P.	ELEVATOR	GRANT

Docket Number	Applicant Name	Safety Order(s) at Issue	Proposed Decision Recommendation
43. 26-V-450	Second Harvest of Silicon Valley	ELEVATOR	GRANT
44. 26-V-451	Mercy Housing California 114, L.P.	ELEVATOR	GRANT
45. 26-V-452	Mercy Housing California 114, L.P.	ELEVATOR	GRANT
46. 26-V-453	Santa Cruz City Schools	ELEVATOR	GRANT
47. 26-V-454	BSL Centinela, LLC	ELEVATOR	GRANT
48. 26-V-455	The Harker School	ELEVATOR	GRANT
49. 26-V-456	Grays Crossing Hospitality LLC	ELEVATOR	GRANT
50. 26-V-457	Berryessa Affordable Housing, L.P.	ELEVATOR	GRANT
51. 26-V-458	Visionary Home Builders of California, Inc.	ELEVATOR	GRANT
52. 26-V-459	SPG-AMLI Brea Residential, LLC	ELEVATOR	GRANT
53. 26-V-460	Salk Avenue Holdings LLC	ELEVATOR	GRANT
54. 26-V-461	CCFB Real Estate, Inc.	ELEVATOR	GRANT
55. 26-V-462	2K's REALTY LLC	ELEVATOR	GRANT
56. 26-V-463	Paradise Marin LLC	ELEVATOR	GRANT
57. 26-V-464	California Rural Legal Assistance Inc.	ELEVATOR	GRANT
58. 26-V-465	J.S. West Milling Company	ELEVATOR	GRANT
59. 26-V-466	Page I Estate LLC	ELEVATOR	GRANT
60. 26-V-467	Page II Estate LLC	ELEVATOR	GRANT
61. 26-V-468	Rocklin Sierra 703, L.P.	ELEVATOR	GRANT
62. 26-V-469	City of Los Angeles, Dept. of Public Works	ELEVATOR	GRANT
63. 26-V-470	929 18th Street, LLC	ELEVATOR	GRANT
64. 26-V-471	Mercy Housing California 91, L.P.	ELEVATOR	GRANT
65. 26-V-472	Balboa Lee Ave LP	ELEVATOR	GRANT

Docket Number	Applicant Name	Safety Order(s) at Issue	Proposed Decision Recommendation
66. 26-V-473	Odd Fellows Home of California	ELEVATOR	GRANT
67. 26-V-474	Odd Fellows Home of California	ELEVATOR	GRANT
68. 26-V-475	Odd Fellows Home of California	ELEVATOR	GRANT
69. 26-V-476	733 Treat LLC	ELEVATOR	GRANT
70. 26-V-477	Palomar Residences, LLC	ELEVATOR	GRANT
71. 26-V-478	Odd Fellows Home of California	ELEVATOR	GRANT
72. 26-V-479	Calvary Chapel of Chino Hills	ELEVATOR	GRANT
73. 26-V-480	Compton Community College District	ELEVATOR	GRANT
74. 26-V-481	Coral Blossom Apartments LP, A California Limited Partnership	ELEVATOR	GRANT
75. 26-V-482	Inglewood Park Cemetery	ELEVATOR	GRANT
76. 26-V-484	Bachem Americas Inc	ELEVATOR	GRANT
77. 26-V-485	Tustin Legacy Acquisition, LLC	ELEVATOR	GRANT
78. 26-V-486	CA Circle Family Apartments, LP	ELEVATOR	GRANT
79. 26-V-487	ESC Senior, L.P.	ELEVATOR	GRANT
80. 26-V-488	GS Agoura Hills Venture Owner, LLC	ELEVATOR	GRANT

PROPOSED DECISIONS FOR BOARD CONSIDERATION, HEARD ON SEPTEMBER 18, 2025

Docket Number	Applicant Name	Safety Order(s) at Issue	Proposed Decision Recommendation
81. 23-V-580	Dragados	Sections 1604.24(a)(2), 1604.26(c) and 8495(b)(i)	DENY

Occupational Safety and Health Standards Board

Public and Business Meeting

Meeting Notice

Prepared by the Department of Industrial Relations
Available on the DIR web page: Standards Board (OSHSB) 2026 Meeting Schedule

OCCUPATIONAL SAFETY
AND HEALTH STANDARDS BOARD
2520 Venture Oaks Way, Suite 350
Sacramento, CA 95833
(916) 274-5721
Website address www.dir.ca.gov/oshsb

NOTICE OF PUBLIC MEETING AND BUSINESS MEETING OF THE OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD

Pursuant to Government Code section 11346.4 and the provisions of Labor Code Sections 142.1, 142.2, 142.3, 142.4, and 144.6, the Occupational Safety and Health Standards Board ("Board") of the State of California has set the time and place for a Public Meeting and Business Meeting:

QR Code for Access:

On **October 15, 2026**, at 10:00 a.m.
San Diego County Administration Center
Room 310
1600 Pacific Highway
San Diego, California 92101

as well as via the following:

- Videoconference at https://tkoworks.zoom.us/j/87501250331
- Teleconference at (669) 444-9171 (Webinar ID 875 0125 0331)
- Live video stream and audio stream (English and Spanish) at: https://videobookcase.com/california/oshsb/

At the Public Meeting, the Board will make time available to receive comments or proposals from interested persons on any item concerning occupational safety and health.

At the Business Meeting, the Board will conduct its monthly business.

DISABILITY ACCOMMODATION NOTICE: Disability accommodation is available upon request. Any person with a disability requiring an accommodation, auxiliary aid or service, or a modification of policies or procedures to ensure effective communication and access to the public hearings/meetings of the Board should contact the Disability Accommodation Coordinator at (916) 274-5721 or the state-wide Disability Accommodation Coordinator at 1 (866) 326-1616 (toll free). The state-wide Coordinator can also be reached through the California Relay Service, by dialing 711 or 1 (800) 735-2929 (TTY) or 1 (800) 855-3000 (TTY-Spanish).

Accommodations can include modifications of policies or procedures or provision of auxiliary aids or services. Accommodations include, but are not limited to, an Assistive Listening System (ALS), a Computer-Aided Transcription System or Communication Access Realtime Translation (CART), a sign-language interpreter, documents in Braille, large print or on computer disk, and audio cassette recording. Accommodation requests should be made as soon as possible. Requests for an ALS or CART should be made no later than five (5) days before the hearing.

OCCUPATIONAL SAFETY AND HEALTH
STANDARDS BOARD

JOSEPH M. ALIOTO JR., Chairman

Occupational Safety and Health Standards Board

Business Meeting
Standards for Adoption

Revisions to the Elevator Safety Orders

Prepared by the Department of Industrial Relations
Available on the DIR web page: Standards Board (OSHSB) 2026 Meeting Schedule

MOVED, That the following resolution be adopted:

WHEREAS, On May 1, 2026, the Occupational Safety and Health Standards Board, pursuant to Government Code Section 11346.4, fixed the time and place for a Public Hearing to consider the revisions to Title 8, Elevator Safety Orders, Chapter 4, Subchapter 6, Revisions to the Elevator Safety Orders.

WHEREAS, Such Public Hearing was held in person in Sacramento, California and via teleconference and videoconference, on June 18, 2026, and there are now before the Occupational Safety and Health Standards Board the proposed revisions to Title 8, Elevator Safety Orders, Chapter 4, Subchapter 6, Revisions to the Elevator Safety Orders, be it

RESOLVED By the Occupational Safety and Health Standards Board in regular meeting held in person in San Diego, California and via teleconference and videoconference, on October 15, 2026, that the proposed revisions to Title 8, Elevator Safety Orders, Chapter 4, Subchapter 6, Revisions to the Elevator Safety Orders, be adopted.

RESOLVED That the Occupational Safety and Health Standards Board shall file with the Office of Administrative Law a sufficient number of copies of said filing documents and a copy of the rulemaking file for use by the Office of Administrative Law.

OCCUPATIONAL SAFETY AND HEALTH
STANDARDS BOARD

_____
JOSEPH M. ALIOTO JR., CHAIRMAN

_____

_____

_____

_____

_____

_____

Certified As A Regulation
Of the Occupational Safety
And Health Standards Board

BY:_____
Millicent Robinette, Executive Officer

DATED: October 15, 2026

TITLE 8

ELEVATOR SAFETY ORDERS

CHAPTER 4, SUBCHAPTER 6

REVISIONS TO THE ELEVATOR SAFETY ORDERS

HYPERLINKS TO RULEMAKING DOCUMENTS:

TEXT FOR BOARD CONSIDERATION

FINAL STATEMENT OF REASONS

INITIAL STATEMENT OF REASONS

Occupational Safety and Health Standards Board

Public and Business Meeting

Petition 614

Prepared by the Department of Industrial Relations
Available on the DIR web page: Standards Board (OSHSB) 2026 Meeting Schedule

STATE OF CALIFORNIA
DEPARTMENT OF INDUSTRIAL RELATIONS
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
2520 Venture Oaks Way, Suite 350
Sacramento, California 95833
(916) 274-5721

In the Matter of a Petition by:	)	
	)	
Outdoor Power Equipment	)	
Institute, Inc. (OPEI)	)	
	)	
	)	**PETITION FILE NO. 614**
Applicant.	)	

The Occupational Safety and Health Standards Board hereby adopts the attached PROPOSED DECISION.

OCCUPATIONAL SAFETY AND HEALTH
STANDARDS BOARD

JOSEPH M. ALIOTO JR., Chairman

DAVE HARRISON, Member

CASSIE HILASKI, Member

NOLA KENNEDY, Member

CHRIS LASZCZ-DAVIS, Member

JOSHUA LEPPER, Member

DEREK URWIN, Member

By: _____
Millicent Barajas, Executive Officer

DATE: October 15, 2026
Attachments

OCCUPATIONAL SAFETY
AND HEALTH STANDARDS BOARD
2520 Venture Oaks Way, Suite 350
Sacramento, CA 95833
(916) 274-5721
www.dir.ca.gov/oshsb

PROPOSED PETITION DECISION OF THE OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD (PETITION FILE NO. 614)

I. INTRODUCTION

On April 17, 2026, the Occupational Safety and Health Standards Board (Board of OSHSB) received a petition from Dan Mustico of Outdoor Power Equipment Institute, Inc. (OPEI or Petitioner), to amend title 8, section 3563 Power Lawn Mowers, to revise and update references to various American National Standards Institute (ANSI) B71 and the Outdoor Power Equipment Institute standards that identify safety specifications for powered equipment used in turf care and maintenance. The Petitioner also requests the regulations be amended to add new ANSI/OPEI and Underwriters Laboratories (UL) consensus standards.

II. SUMMARY

The Petitioner requests the Board to amend title 8, subsections 3563(a), (b), and (c).

With respect to subsection 3563(a) the Petitioner suggests adding "applicable standards in clause (b) below" and move the reference to ANSI B71.1 or B71.4 to subsection 3563(b)(2).

The Petitioner's request would amend the scope to read as follows[1]:

Section 3563(a)

> […] These regulations do not apply to […] tractors as defined in Article 25 of these Orders unless the tractor is designed primarily for mowing lawns and manufactured in conformance with the <u>applicable standards in clause (b) below.</u>

Additionally, the Petitioner requests amending all references to these ANSI consensus standards to be ANSI/OPEI where applicable and add new ANSI/OPEI and Underwriters Laboratories (UL) consensus standards. These amendments would apply to subsection 3563(b)(2).

[1] Underlined text indicates proposed new text while strikeout of text signifies proposed text deletion.

The Petitioner's proposal in part:

Section 3563(b)(2)

> Power lawn mowers manufactured after April 15, 1999, shall meet the requirements of one of the following ANSI/OPEI B71.1 or B71.4 standards, or ANSI/OPEI 5395-2, 5395-3, or UL 62841-4-3, 1447, 2753, as applicable, based on the mower design and date of manufacture. These ~~ANSI~~ standards are hereby incorporated by reference:
>
> ANSI/OPEI B71.1-1998 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,
>
> ANSI/OPEI B71.1-2003 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,
>
> ANSI/OPEI B71.1-2012 standard for Consumer Turf Care Equipment Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,
>
> ANSI/OPEI B71.1-2017 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,
>
> ANSI/OPEI B71.4-1999 standard for Commercial Turf Care Equipment-Safety Specifications,
>
> ANSI/OPEI B71.4-2004 standard for Commercial Turf Care Equipment-Safety Specifications.
>
> ANSI/OPEI B71.4-2012 standard for Commercial Turf Care Equipment Safety Specifications. ANSI/OPEI B71.4-2017 standard for Commercial Turf Care Equipment-Safety Specifications.
>
> ANSI/OPEI 5395-2-2024 standard for Combustion-Engine-Powered Lawnmowers – Part 2: Pedestrian-Controlled Lawnmowers
>
> ANSI/OPEI 5395-3-2024 standard for Combustion-Engine-Powered Lawnmowers – Part 3: Ride-On Lawnmowers
>
> UL 62841-4-3-2023 standard for Electric Motor-Operated Hand-Held Tools, Transportable Tools and Lawn and Garden Machinery – Safety – Part 4-3: Particular Requirements for Pedestrian Controlled Walk-Behind Lawnmowers
>
> UL 1447-2017 standard for Electric Lawn Mowers UL 2753-2018 Outline of Investigation for Battery Operated Ride-On Lawn Mowers

Lastly, the Petitioner requests removal of subsection 3563(b)(3) because they believe this reference is outdated, provides no safety benefit, and is an undue burden to California's employers.

~~(3) Power lawn mowers manufactured after September 2, 2010, shall be affixed with a durable label stating that the power lawn mower is manufactured in accordance with the applicable ANSI B71.1 or B71.4 standard~~.

III. RELEVANT STANDARDS

A. Federal Standards

Federal OSHA requirements for powered lawn mowers are codified in 29 CFR 1910.243(e). Prior to 2005, 29 CFR 1910.243 required certain powered lawnmowers to meet the requirements of ANSI B71.1-1968.

On Sept. 13, 2005, Federal OSHA[2], "[revoked] from its portable powered tools standard the provision that certain power lawnmowers designed for sale to the general public meet the American National Standard Safety Specifications for Power Lawnmowers, ANSI B71.1–X1968 (ANSI B71.1–1968)."

Instead, Federal OSHA referenced the general machine guarding standard in 29 CFR 1910.212.

Federal OSHA further explained that:

> *[…] virtually all of the specific provisions contained in ANSI B71.1–1968 are included in the text of 29 CFR 1910.243(e). [Federal] OSHA considered updating the 1968 ANSI reference to the 1998 version of ANSI B71.1 but determined that doing so would not clarify the standard because the scope of the 1998 version would raise additional issues for compliance that are not encountered under the existing [Federal] OSHA standard.*

Since Federal OSHA no longer references B71.1, powered lawn mowers requirements are accessible directly by the employers and end users.

B. California Standards

[2] Federal Register, Vol 70, No. 176, page 53925, (Accessed May 1, 2026)

Section 3563(a) states in the part relevant to Petitioner's request:

> *[…] These regulations do not apply to […] tractors as defined in Article 25 of these Orders[3] unless the tractor is designed primarily for mowing lawns and manufactured in conformance with the ANSI B71.1 or B71.4 national consensus standards for power lawn mowers.[…]*

Section 3563(b)(2) states in part:

> *Power lawn mowers manufactured after April 15, 1999, shall meet the requirements of one of the following ANSI B71.1 or B71.4 standards, as applicable, based on the mower design and date of manufacture.[…]*

Section 3563(b)(3)

> *Power lawn mowers manufactured after September 2, 2010, shall be affixed with a durable label stating that the power lawn mower is manufactured in accordance with the applicable ANSI B71.1 or B71.4 standard.*

C. Consensus Standards

The ANSI/OPEI and UL standards are voluntary consensus standards. Powered lawn mowers are manufactured to meet various national and international consensus standards. IEC 62841-4-3 addresses electric and battery powered lawnmowers. Robotic lawnmowers are covered by IEC 60335-2-107 and will be covered by a future part of IEC 62841. Additional standards are forthcoming. For example, ISO/AWI 18460 *Powered lawn and garden equipment — Internal-combustion engine-powered autonomous lawnmowers* are currently in development.

Powered Lawn Mowers - ANSI/OPEI consensus codes

ANSI/OPEI B71.1 (consumer) and B71.4 (commercial) for decades have served as the consensus codes regarding consumer (residential) and commercial lawn mower standards. In 2024, OPEI replaced B71.1 and B71.4 with ANSI/OPEI 5395 (-1, -2 and -3) to harmonize with international mower standards (ISO 5395). Voluntary compliance by manufacturers of powered lawn mowers with ANSI/OPEI 5395 is expected to begin 2 years after the ANSI publication date.

ANSI/OPEI B71.1/B71.4 Standards vs. ANSI/OPEI 5395 Standards

The ANSI/OPEI B71.1 and B71.4 differ from the later ANSI/OPEI 5395-2024 standards in that the 2024 standard applies to both consumer (residential) and commercial equipment

[3] Section 3649 defines "Industrial Tractor" as "A wheel or track-type vehicle of more than 20 engine horsepower used in operations such as landscaping, construction services, loading, digging, grounds keeping, and highway maintenance." Additionally, "Agricultural Tractor" is defined as "A wheel type vehicle, or track vehicle, of more than 20 engine horsepower, designed to furnish the power to pull, carry, propel, or drive implements that are designed for agriculture. All self-propelled implements are excluded."

whereas ANSI/OPEI B71.1 (consumer) and ANSI/OPEI B71.4 (commercial) treated these separately.

ANSI/OPEI 5395 and its two companion standards provide requirements separately as Part 1, terminology and common tests; Part 2, pedestrian-controlled lawnmowers; and Part 3, ride-on lawnmowers, whereas ANSI/OPEI B71.1 and B71.4 cover these requirements together. The ANSI/OPEI 5395-2024 standards are also harmonized with international ISO standards. As such, the testing requirements for lawnmowers conform to ISO testing procedures. Additionally, electrically powered and battery-powered lawnmowers are excluded from the scope of ANSI/OPEI 5395-2-2024 and ANSI/OPEI 5395-3-2024, whereas such equipment is included in the ANSI/OPEI B71.1 and B71.4 standards.

Electric and Battery Powered Lawn Mowers - UL 2753-1 and UL 1447.4

Unlike B71.1 and B71.4, ANSI/OPEI 5395 requirements do not extend to electric or battery powered lawn mowers. Voluntary consensus standards for electric or battery powered lawn mowers, UL 2753-1 and UL 1447.4 both require conformance with ANSI B71.1. Board staff is not aware of any efforts to update the requirements of UL 2753-1 and UL 1447.4 to reference the newer ANSI/OPEI 5395 instead of B71.1.

UL 62841-4-3: Particular Requirements For Pedestrian Controlled Walk-Behind Lawnmowers

UL 62841-4-3 applies to the design of pedestrian controlled walk-behind cylindrical lawnmowers and rotary lawnmowers equipped with metallic cutting means; rigid non-metallic cutting means; or non-metallic cutting means with one or more elements pivotally mounted on a generally circular drive unit, where these cutting elements rely on centrifugal force to achieve cutting and have a kinetic energy for each single cutting element of greater than 10 J [kg-m^2/s^2]. UL 62841-4-3 does include a number of references to ISO 5395 and B71.1.

IV. CAL/OSHA'S EVALUATION

The Cal/OSHA evaluation states that incorporating the ANSI/OPEI 5395 standards would require referencing two different standards and would not provide a significant benefit for safety. Cal/OSHA opines certain provisions of the ANSI/OPEI 5395 standards provide additional or more stringent requirements than those in the ANSI B71.1 and B71.4 standards. These provisions include, but are not limited to, a faster stopping time for mower blades, requirements for sulky attachments[4], and testing protocols for noise attachments. However, these requirements would not significantly increase worker safety, are addressed by current title 8 regulations, and would require references to two different standards that apply to the same equipment. This would create confusion and an added layer of

[4] Sulky attachments are platforms or wheeled carts that attach to a commercial walk-behind lawn mower, turning it into a stand-on riding machine.

complexity for employers and Cal/OSHA staff in determining compliance with title 8 regulations.

Furthermore, Cal/OSHA does not support the incorporation of the incorporation of Underwriters Laboratories (UL) standards proposed by the petitioner (UL 1447-2017, UL 2753-2018, and UL 62841-4-3-2023)[5] since it would reduce worker safety because the requirements are less effective than current title 8 regulations. Electric lawn mowers operate at electric potentials between 40 and 80 volts, with the most common voltage being 60 volts. Title 8 Low-Voltage Safety Orders apply to electrical equipment operating between 50 and 600 volts. Therefore, most electric lawn mowers would fall within the scope of the title 8 Group 1 Low-Voltage Safety Orders in addition to the General Industry Safety Orders. The UL standards proposed by the petitioner include requirements to reduce risks rather than eliminate hazards, whereas the applicable title 8 regulations (such as section 2340.2) requires hazards likely to cause death or serious physical harm to be eliminated.

Cal/OSHA further adds in contrast to the UL standards, which incorporate language to "reduce the risk, likelihood, or possibility" of a hazard, title 8 regulations, such as those included in Section 3.0 of its evaluation, prescribe requirements to eliminate hazards rather than merely reduce them. Including the UL standards proposed by the petitioner would, therefore, reduce the effectiveness of title 8 regulations and worker safety. Additionally, the UL 62841-4-3–2023 allows for warning labels for pedestrian controlled mowers of only 2.4 mm in height in contrast to the 3.25 in (82.5 mm) minimum height required by ANSI/OPEI B71.1-2017.

V. STAFF'S EVALUATION

The Board staff evaluation analysis states the Petitioner requests amendments to expand the scope of section 3563, in subsection (a) to include tractors manufactured in conformance with the OPEI 5395-3, UL 1447, 2753. The scope of OPEI 5395-2 and UL 62841-4-3 do not include tractors. The effect of the Petitioner's proposal would extend coverage to newer models of powered lawn mowers. These additional units would not be covered under the regulation without the proposed amendment. Retaining coverage for electric/battery powered units would be accomplished through the adoption of the UL codes.

The Petitioner also proposes repealing the last sentence in subsection 3563(a). Board staff states it is not aware of any expansion or contraction of the scope of section 3563(a) introduced by this amendment.

With respect to subsection 3563(b)(2) the Petitioner seeks to expand coverage to include powered lawn mowers manufactured to conform to newer ANSI/OPEI codes and retain coverage of battery/electric powered lawn mowers that are manufactured to conform to recent edition of the B71.1 and B71.4 and relevant UL codes. Specifically, the Petitioner

[5] Although the Cal/OSHA evaluation referenced consensus standards text as attachments, they cannot be provided because they are copyrighted published works.

requested changes to section 3563(b)(2) to include updates editions of the B71.1 and B71.4. The proposed change seeks to incorporate by reference the 2012 and 2017 editions of B71.1 and B71.4.[6] Further, the Petitioner seeks to include the 2024 editions of ANSI/OPEI 5393-2 and 3. Finally, the Petitioner proposes to also incorporate by reference UL 62841, UL 1447 and UL 2753 to address electric and battery powered lawn mowers.

In subsequent discussions with the Petitioner, the Petitioner explained that the new ANSI/OPEI 5395-2 and 5395-3 were based upon the International Organization for Standardization (ISO) code for "Garden Equipment." Additionally, battery and electric powered lawn mowers were not covered under the ANSI/OPEI standards. Consensus standards for battery and electric powered lawn mowers are published by UL.

Board staff infers that the Petitioner's concern is that voluntary compliance with the ANSI/OPEI 5395-2 and -3 would shift newly manufactured powered lawn mowers away from the criteria required under ANSI/OPEI B71.1 and B71.4 and thus no longer consistent with section 3563(b)(2) and (3). Board staff shares the concern that newer and electric powered lawn mowers require updated references under section 3563.

From a safety perspective, the Board evaluation states according to federal OSHA data there have been 30 non-fatal incidents and 2 fatal incidents from 2014 – 2023[7] involving lawn mowers in California.

Board staff inquired from Cal/OSHA whether title 8, section 3563(b)(2) and 3563(b)(3) have been cited during the period beginning in 2014 through 2024. Cal/OSHA reported that there are no citations for section 3563(b)(2) or (3) were issued by Cal/OSHA in that period. Thus, it does not appear that safety is a major concern to address when considering this proposed petition. Subsequently, Board staff recommends granting the Petitioner's request

[6] The following are the specific consensus code which the Petitioner requests for inclusion into title 8 and were referenced as attachments in the Cal/OSHA evaluation:

- ANSI/OPEI B71.1-2012 standard for Consumer Turf Care Equipment Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications;
- ANSI/OPEI B71.1-2017 standard for Consumer Turf Care Equipment Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications;
- ANSI/OPEI B71.4-2012 standard for Commercial Turf Care Equipment Safety Specifications;
- ANSI/OPEI B71.4-2017 standard for Commercial Turf Care Equipment-Safety Specifications;
- ANSI/OPEI 5395-2-2024 standard for Combustion-Engine-Powered Lawnmowers – Part 2: Pedestrian-Controlled Lawnmowers;
- ANSI/OPEI 5395-3-2024 standard for Combustion-Engine-Powered Lawnmowers – Part 3: Ride-On Lawnmowers;
- UL 62841-4-3-2023 standard for Electric Motor-Operated Hand-Held Tools, Transportable Tools and Lawn and Garden Machinery – Safety – Part 4-3: Particular Requirements for Pedestrian Controlled Walk-Behind Lawnmowers;
- UL 1447-2017 standard for Electric Lawn Mowers; and
- UL 2753-2018 Outline of Investigation for Battery Operated Ride-On Lawn Mowers.

[7] Amputation (18), Avulsion (1), Burns (1), Crushed by (1), Fall (1), Fracture (2), Laceration (3), Pinch point (1), Pulled-in (1), Roll Over (2) and Struck by (1)

as to sections 3563(a) and (b)(2).

The Petitioner's requested change repeals requirements for powered lawnmowers manufactured after Sept. 2, 2010, to be affixed with a durable label stating the powered lawnmower is manufactured in accordance with the acceptable ANSI B71.1 or B71.4. The Petitioner argues that the requirement is not included in any editions of cited standards, has no safety benefit and imposes an undue burden unique to California.

Board staff disagrees with the proposed repeal. In the absence of such a label, the employer must seek other means of assurance that the lawnmower meets a particular consensus standard – especially if such adherence to a consensus standard is required.
.

VI. DISCUSSION

In their evaluations, Cal/OSHA and Board took different perspectives on the effect the Petitioner's proposal to incorporate by reference OPEI and UL standards as well as removal of labeling requirements for power lawn mowers manufactured after September 2, 2010, required by subsection 3563(b)(3).

Cal/OSHA cited numerous examples where it believes the proposed changes would result in less safety. However, the ANSI/OPEI B71.1 version of the consensus code referenced is from 2017, not the current 2024 code. In 2024, OPEI replaced B71.1 and B71.4 with ANSI/OPEI 5395 (-1, -2 and -3) to harmonize with international mower standards (ISO 5395). Additionally, section 3563(b)(2) incorporates this standard by reference, keeping it constantly updated.

Board staff in its evaluation recognized that gaps remain. The Board staff evaluation suggests the Petitioner's changes to incorporate the OPEI and UL codes be granted to ensure continued compliance as they pertain to newer and electric powered lawn mowers.

While Cal/OSHA cited federal regulations and other general title 8 regulations as examples of safety provisions like guarding, Board staff believes California's regulatory framework relies directly upon the consensus codes for more specific subject matter safety requirements. Unlike Federal OSHA's requirements, the consensus codes interweave the guarding requirements throughout their texts. The ANSI codes, for example, contain blade enclosure requirements and limit the openings to the spinning blades. The criteria for low voltage components, controls, brakes and signage are also described in the consensus codes. Thus, the consensus codes offer specificity in what components need to be guarded and the configurations of those guards rather than applying general guarding requirements.

VII. CONCLUSION AND ORDER

The Board has considered the petition of Dan Mustico of Outdoor Power Equipment Institute, Inc**.** to update subsections 3563(a), (b)(2), and (b)(3). For reasons stated in the preceding discussion, Petition 614 is GRANTED in part and DENIED in part. As to subsections 3563(a) and 3563(b)(2), Petitioner's request is GRANTED to the extent Board

staff considers the necessity of convening an advisory committee to discuss the best way to update section 3563 with the most relevant ANSI/OPEI and UL consensus standards while maintaining safety. As to subsection 3563(b)(3), Petitioner's request is DENIED.

State of California
Department of Industrial Relations
Occupational Safety and Health Standards Board

Petition File No. 614

Board Staff Evaluation
Submitted by: Mike Nelmida, Senior Safety Engineer

September 29, 2026

State of California

Gavin Newsom, Governor

INTRODUCTION

Petition 614 was submitted by Daniel J. Mustico, Senior Vice President, Government & Market Affairs Outdoor Power Equipment Institute, Inc. (Petitioner). The petition seeks to amend title 8, section 3563 Power Lawn Mowers, to revise and update references to various American National Standards Institute (ANSI) B71 and the Outdoor Power Equipment Institute (OPEI) standards that specify safety specifications for powered equipment used in turf care and maintenance. The Petitioner identifies and requests additional Underwriters Laboratories (UL) consensus standards be added.

REQUESTED ACTION

- Amend section 3563(a) relocating referenced ANSI B71 standard to subsection 3563(b)(2);
- Amend section 3563(b)(2) references to ANSI B71 to include "OPEI" as part of the consensus code designation;
- Amend section 3563(b)(2) to include references to ANSI/OPEI B71.4 2012 and 2014;
- Amend section 3563(b)(2) to include the 2024 editions of ANSI/OPEI 5395-2 and 5395-3;
- Amend section 3563(b)(2) to include Underwriters Laboratories standards UL 62841-4-3-2023, UL 1447-2017 and UL 2753-2018; and
- Repeal section 3563(b)(3).

BACKGROUND/HISTORY

Section 3563 was last amended by the Board in 2009. The amendments included, in relevant part, the incorporation by reference ANSI B71 standards found in subsection (b)(2). The regulation was developed with the aid of an advisory committee chaired by the Board staff. The committee met on October 28-29, 2008, and a subcommittee was formed and met on December 16, 2008.

Notice of proposed action October 30, 2009, Register 2009 No. 44-Z

> *The advisory committee including manufacturer representatives agreed that a statement of compliance with the applicable ANSI B71.1 or [B71].4 standard would have the effect of assisting both the employer and the Division in determining that the mower is in compliance with the provisions of subsection (b)(2).*

Federal Requirements

Occupational Safety and Health Administration (29 CFR)

Federal OSHA requirements for powered lawn mowers are codified in 29 CFR 1910.243(e). Prior to 2005, 29 CFR 1910.243 required certain powered lawnmowers to meet the requirements of ANSI B71.1-1968.

On Sept. 13, 2005, Federal OSHA[1], "[revoked] from its portable powered tools standard the provision that certain power lawnmowers designed for sale to the general public meet the American National Standard Safety Specifications for Power Lawnmowers, ANSI B71.1–X1968 (ANSI B71.1–1968)."

Instead, Federal OSHA referenced the general machine guarding standard in 29 CFR 1910.212.

Federal OSHA further explained that:

> *[…] virtually all of the specific provisions contained in ANSI B71.1–1968 are included in the text of 29 CFR 1910.243(e). [Federal] OSHA considered updating the 1968 ANSI reference to the 1998 version of ANSI B71.1 but determined that doing so would not clarify the standard because the scope of the 1998 version would raise additional issues for compliance that are not encountered under the existing [Federal] OSHA standard.*

Since Federal OSHA no longer references B71.1, powered lawn mowers requirements are accessible directly by the employers and end users.

Consumer Products Safety Commission (16 CFR)

The Consumer Products Safety Commission has adopted regulations which cover the Consumer Products Safety Act, Title 16, Code of Federal Regulation, Part 1205 – Safety Standard for Walk-Behind Power Lawn Mowers.

> *This subpart A of part 1205 is a consumer product safety standard which prescribes safety requirements for certain walk-behind power lawn mowers, including labeling and performance requirements. The performance requirements of the standard apply to rotary mowers. The labeling requirements apply to both rotary and reel-type mowers. The standard is intended to reduce the risk of injury to consumers caused by contact, primarily of the foot and hand, with the rotating blade of the mower.*

Consensus Standards

The ANSI/OPEI and UL standards are voluntary consensus standards. Powered lawn mowers are manufactured to meet various national and international consensus standards. IEC 62841-4-3 addresses electric and battery powered lawnmowers. Robotic lawnmowers are covered by IEC 60335-2-107 and will be covered by a future part of IEC 62841. Additional standards are forthcoming. For example, ISO/AWI 18460

[1] Federal Register, Vol 70, No. 176, page 53925, (Accessed May 1, 2026)

Powered lawn and garden equipment — Internal-combustion engine-powered autonomous lawnmowers are currently in development.

Powered Lawn Mowers

ANSI/OPEI consensus codes

ANSI/OPEI B71.1 (consumer) and B71.4 (commercial) for decades have served as the consensus codes regarding consumer (residential) and commercial lawn mower standards. In 2024, OPEI replaced B71.1 and B71.4 with ANSI/OPEI 5395 (-1, -2 and -3) to harmonize with international mower standards (ISO 5395). Voluntary compliance by manufacturers of powered lawn mowers with ANSI/OPEI 5395 is expected to begin 2 years after the ANSI publication date.

Electric and Battery Powered Lawn Mowers

UL 2753-1 and UL 1447.4

Unlike B71.1 and B71.4, ANSI/OPEI 5395 requirements do not extend to electric or battery powered lawn mowers. Voluntary consensus standards for electric or battery powered lawn mowers, UL 2753-1 and UL 1447.4 both require conformance with ANSI B71.1. Board staff is not aware of any efforts to update the requirements of UL 2753-1 and UL 1447.4 to reference the newer ANSI/OPEI 5395 instead of B71.1.

UL 62841-4-3: Particular requirements for pedestrian controlled walk-behind lawnmowers

UL 62841-4-3 applies to the design of pedestrian controlled walk-behind cylindrical lawnmowers and rotary lawnmowers equipped with metallic cutting means; rigid non-metallic cutting means; or non-metallic cutting means with one or more elements pivotally mounted on a generally circular drive unit, where these cutting elements rely on centrifugal force to achieve cutting and have a kinetic energy for each single cutting element of greater than 10 J [kg-m^2/s^2]. UL 62841-4-3 does include a number of references to ISO 5395 and B71.1.

Staff Analysis

Background

The California Air Resources Board in 2022 estimated:

	Lawn Mowers	Riding Mowers
Landscapers	136,242	15,462
Non-landscapers	135,402	7,617

According to federal OSHA data there have been 30 non-fatal incidents and 2 fatal incidents from 2014 – 2023[2] involving lawn mowers in California.

Board staff inquired from Cal/OSHA whether title 8, section 3563(b)(2) and 3563(b)(3) have been cited during the period beginning in 2014 through 2024. Cal/OSHA reported that there are no citations for section 3563(b)(2) or (3) were issued by Cal/OSHA in that period.

Analysis of Petitioner's specific requests

Section 3563(a)

Section 3563(a) states in the part relevant to Petitioner's request:

> *[…] These regulations do not apply to […] tractors as defined in Article 25 of these Orders[3] unless the tractor is designed primarily for mowing lawns and manufactured in conformance with the ANSI B71.1 or B71.4 national consensus standards for power lawn mowers.[…]*

The Petitioner's request would amend the scope read as follows:

> *[…] These regulations do not apply to […] tractors as defined in Article 25 of these Orders unless the tractor is designed primarily for mowing lawns and manufactured in conformance with the applicable standards in clause (b) below.*

The Petitioner requests amendments to expand the scope of section 3563, in subsection (a) to include tractors manufactured in conformance with the OPEI 5395-3, UL 1447, 2753. The scope of OPEI 5395-2 and UL 62841-4-3 do not include tractors. The effect of the Petitioner's proposal would extend coverage to newer models of powered lawn mowers. These additional units would not be covered under the regulation without the proposed amendment. Retaining coverage for electric/battery powered units would be accomplished thought the adoption of the UL codes.

[2] Amputation (18), Avulsion (1), Burns (1), Crushed by (1), Fall (1), Fracture (2), Laceration (3), Pinch point (1), Pulled-in (1), Roll Over (2) and Struck by (1)

[3] Section 3649 defines "Industrial Tractor" as "A wheel or track-type vehicle of more than 20 engine horsepower used in operations such as landscaping, construction services, loading, digging, grounds keeping, and highway maintenance." Additionally, "Agricultural Tractor" is defined as "A wheel type vehicle, or track vehicle, of more than 20 engine horsepower, designed to furnish the power to pull, carry, propel, or drive implements that are designed for agriculture. All self-propelled implements are excluded."

The Petitioner's also proposes repealing the last sentence in subsection 3563(a):

> *[…]Requirements for tractors and attachments used in mowing operation that are manufactured in conformance with the ANSI B71.1 and B71.4 standards are provided in this Section.*

Board staff is not aware of any expansion or contraction of the scope of section 3563(a) introduced by this amendment.

Section 3563(b)(2)

Section 3563(b)(2) states in part:

> *Power lawn mowers manufactured after April 15, 1999, shall meet the requirements of one of the following ANSI B71.1 or B71.4 standards, as applicable, based on the mower design and date of manufacture.[…]*

The Petitioner's proposal in part:

> *(2) Power lawn mowers manufactured after April 15, 1999, shall meet the requirements of one of the following ANSI/OPEI B71.1 or B71.4 standards, or ANSI/OPEI 5395-2, 5395-3, or UL 62841-4-3, 1447, 2753, as applicable, based on the mower design and date of manufacture.*

The Petitioner seeks to expand coverage includes powered lawn mowers manufactured to conform to newer ANSI/OPEI codes and retain coverage of battery/electric powered lawn mowers that are manufactured to conform to recent edition of the B71.1 and B71.4 and relevant UL codes. Specifically, the Petitioner's requested changes to section 3563(b)(2) to include updates editions of the B71.1 and B71.4. The proposed change seeks to incorporate by reference the 2012 and 2017 editions of B71.1 and B71.4. Further, the Petitioner seeks to include the 2024 editions of ANSI/OPEI 5393-2 and 3. Finally, the Petitioner proposes to also incorporate by reference UL 62841, UL 1447 and UL 2753 to address electric and battery powered lawn mowers.

The following are the specific consensus code which the Petitioner requests for inclusion into title 8:

- ANSI/OPEI B71.1-2012 standard for Consumer Turf Care Equipment Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications;
- ANSI/OPEI B71.1-2017 standard for Consumer Turf Care Equipment Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications;
- ANSI/OPEI B71.4-2012 standard for Commercial Turf Care Equipment Safety Specifications;
- ANSI/OPEI B71.4-2017 standard for Commercial Turf Care Equipment-Safety Specifications;

- ANSI/OPEI 5395-2-2024 standard for Combustion-Engine-Powered Lawnmowers – Part 2: Pedestrian-Controlled Lawnmowers;
- ANSI/OPEI 5395-3-2024 standard for Combustion-Engine-Powered Lawnmowers – Part 3: Ride-On Lawnmowers;
- UL 62841-4-3-2023 standard for Electric Motor-Operated Hand-Held Tools, Transportable Tools and Lawn and Garden Machinery – Safety – Part 4-3: Particular Requirements for Pedestrian Controlled Walk-Behind Lawnmowers;
- UL 1447-2017 standard for Electric Lawn Mowers; and
- UL 2753-2018 Outline of Investigation for Battery Operated Ride-On Lawn Mowers.

In subsequent discussions with the Petitioner, the Petitioner explained that the new ANSI/OPEI 5395-2 and 5395-3 were based upon the International Organization for Standardization (ISO) code for "Garden Equipment." Additionally, battery and electric powered lawn mowers were not covered under the ANSI/OPEI standards. Consensus standards for battery and electric powered lawn mowers lawn mowers are published by UL.

Board staff infers that the Petitioner's concern is that voluntary compliance with the ANSI/OPEI 5395-2 and -3 would shift newly manufactured powered lawn mowers away from the criteria required under ANSI/OPEI B71.1 and B71.4 and thus no longer consistent with title 8, section 3563(b)(2) and (3). Board staff shares the concern that newer and electric powered lawn mowers require updated references under section 3563.

Incorporation by reference of each edition of the OPEI and UL codes, however, creates a burden upon the regulated public and the rulemaking process. Employers and end users' access to these consensus codes comes at a financial cost in addition to the cost of the powered lawn mower; with only marginal benefit. Employers and end users do not design, test or certify powered lawn mowers. Instead, employers and end users look for guidance in the information provided by the manufacturer of powered lawn mower (e.g. operator's manuals[4]). Employers and end users derive a benefit from the manufacturers' adherence to the voluntary codes rather than employers and end users applying the code directly.

Board staff also recognized that California's regulatory framework relies directly upon the consensus codes for safety requirements. Unlike Federal OSHA's requirements, the consensus codes interweave the guarding requirements throughout their texts. The ANSI codes, for example, contain blade enclosure requirements and limit the openings to the spinning blades. The criteria for low voltage components, controls, brakes and signage are also described in the consensus codes. The consensus codes offer

[4] Some of the consensus codes such as B71.1 and B71.4 contain "Safe Practices" must be provided with the equipment.

specificity in what components need to be guarded and the configurations of those guards rather than applying general guarding requirements (e.g. Federal OSHA's reliance upon 29 CFR 1910.212).

California's reliance upon incorporating by reference limits title 8 regulations to the scopes of consensus codes adopted. Federal requirements are written broadly. Federal requirements are not limited to electric powered lawn mowers governed by the UL codes and internal combustion engine powered lawn mowers governed under the OPEI codes. However, for California to expand coverage under the current scheme, the Petitioner's identified consensus codes must be brought into title 8, either through incorporation by reference or through the development of parallel regulations (e.g. Federal OSHA's schema).

Section 3563(b)(3)

The Petitioner's requested change repeals requirements for powered lawnmowers manufactured after Sept. 2, 2010, to be affixed with a durable label stating the powered lawnmower is manufactured in accordance with the acceptable ANSI B71.1 or B71.4. The Petitioner argues that the requirement is not included in any editions of cited standards, has no safety benefit and imposes an undue burden unique to California.

Board staff disagrees with the proposed repeal. In the absence of such a label, the employer must seek other means of assurance that the lawnmower meets a particular consensus standard – especially if such adherence to a consensus standard is required.

STAFF RECOMMENDATION

Section 3563(a) and (b)(2)

Board staff recommends the Petitioner's request for updates to subsections 3563(a) and 3563(b)(2) be GRANTED to the extent that an advisory committee be convened to consider those updates.

Section 3563(b)(3)

Board staff recommends the Petitioner's request for repeal of subsection 3563(b)(3) be DENIED.

State of California
Department of Industrial Relations
Division of Occupational Safety and Health

M e m o r a n d u m

Date: September 24, 2026

To: Millicent Robinette, Executive Officer
Kevin Goddard, Principal Safety Engineer
Occupational Safety and Health Standards Board

From: Victor Copelan, Senior Safety Engineer
Jason Denning, Principal Safety Engineer
Eric Berg, Deputy Chief of Health
Division of Occupational Safety and Health

Subject: Evaluation of Petition No. 614 to Amend California Code of Regulations title 8 section 3563

1.0 INTRODUCTION

On April 20, 2026, the Division of Occupational Safety and Health (Cal/OSHA) received a petition from Mr. Daniel Mustico, representing the Outdoor Power Equipment Institute, Inc. The petitioner requests that title 8, California Code of Regulations, Section 3563, Power Lawn Mowers, be amended to require power lawn mowers manufactured after April 15, 1999, to meet newer consensus standards than those currently referenced in section 3563. Currently, title 8 section 3563, requires power lawn mowers manufactured after April 15, 1999, to meet the requirements of the 2003 edition of ANSI B71.1 for pedestrian-controlled and riding lawn mowers or the 2004 edition of ANSI B71.4 for commercial turf care equipment.

2.0 PETITIONER'S PROPOSAL AND BASIS FOR AMENDMENT OF TITLE 8 REGULATIONS

The petitioner proposes to incorporate by reference the 2012 and 2017 editions of ANSI/OPEI B71, the 2012 and 2017 edition of ANSI/OPEI B71.4, and the 2024 editions of ANSI/OPEI 5395-2 and 5395-3. To address battery powered lawn mowers, the petitioner also proposes to incorporate by reference the 2017 edition of UL 1447, the 2018 edition of UL 2753, and the 2023 edition of UL 62841-4-3. Additionally, the petitioner proposes to remove the labeling requirements for power lawn mowers manufactured after September 2, 2010, required by subsection 3563(b)(3). The following are the changes to title 8 section 3563 as proposed by the petitioner.

```
Subchapter 7. General Industry Safety Orders
Group 3. General Plant Equipment and Special Operations
Article 20. Hand and Portable Powered Tools and Equipment

§3563. Power Lawn Mowers.
(a) Scope. These regulations apply to power lawn mowers and cover walk-behind
reel and rotary power lawn mowers, riding reel and rotary power lawn mowers,
```

lawn riding tractors with mower attachments, and lawn and garden riding tractors with mower attachments. They are intended to provide safety requirements and to help ensure uniform operator environments. These regulations do not apply to sulky-type units, flail mowers, sickle bar mowers, or tractors as defined in Article 25 of these Orders unless the tractor is designed primarily for mowing lawns and manufactured in conformance with the applicable standards in clause (b) below. ~~ANSI B71.1 or B71.4 national consensus standards for power lawn mowers. Requirements for tractors and attachments used in mowing operations that are manufactured in conformance with the ANSI B71.1 and B71.4 standards are provided in this Section.~~

(b) General.
(1) Power lawn mowers placed in service after March 29, 1975 through April 15, 1999, shall meet the requirements of ANSI B71.1-1972 and B71.1a-1974 or ANSI B71.1-1980, Safety Specifications for Power Lawn Mowers, Lawn and Garden Tractors and Lawn Tractors, or shall meet the requirements of the applicable ANSI B71.1 or B71.4 standard in effect at the time the mower was manufactured.
(2) Power lawn mowers manufactured after April 15, 1999, shall meet the requirements of one of the following ANSI/OPEI B71.1 or B71.4 standards, or ANSI/OPEI 5395-2, 5395-3, or UL 62841-4-3, 1447, 2753, as applicable, based on the mower design and date of manufacture. These ~~ANSI~~ standards are hereby incorporated by reference:
ANSI/OPEI B71.1-1998 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,
ANSI/OPEI B71.1-2003 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,
ANSI/OPEI B71.1-2012 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,
ANSI/OPEI B71.1-2017 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,
ANSI/OPEI B71.4-1999 standard for Commercial Turf Care Equipment-Safety Specifications,
ANSI/OPEI B71.4-2004 standard for Commercial Turf Care Equipment-Safety Specifications.
ANSI/OPEI B71.4-2012 standard for Commercial Turf Care Equipment-Safety Specifications.
ANSI/OPEI B71.4-2017 standard for Commercial Turf Care Equipment-Safety Specifications.
ANSI/OPEI 5395-2-2024 standard for Combustion-Engine-Powered Lawnmowers – Part 2: Pedestrian-Controlled Lawnmowers
ANSI/OPEI 5395-3-2024 standard for Combustion-Engine-Powered Lawnmowers – Part 3: Ride-On Lawnmowers
UL 62841-4-3-2023 standard for Electric Motor-Operated Hand-Held Tools, Transportable Tools and Lawn and Garden Machinery – Safety – Part 4-3: Particular Requirements for Pedestrian Controlled Walk-Behind Lawnmowers
UL 1447-2017 standard for Electric Lawn Mowers
UL 2753-2018 Outline of Investigation for Battery Operated Ride-On Lawn Mowers
~~(3) Power lawn mowers manufactured after September 2, 2010, shall be affixed~~

~~with a durable label stating that the power lawn mower is manufactured in accordance with the applicable ANSI B71.1 or B71.4 standard.~~

~~*****~~

The petitioner asserts that the ANSI B71.1 and B71.4 standards currently referenced in title 8 section 3563, have been revised by more recent editions. More importantly, the petitioner asserts that the 2017 editions of ANSI/OPEI B71.1 and B71.4 have been replaced by the 2024 editions of ANSI/OPEI 5395-2 and 5395-3. ANSI/OPEI 5395-2 and 5395-3 have also been harmonized with ISO standards. In addition, the petitioner opines that UL 1447-2017, UL 2753-2018, and UL 62841-4-3-2023 should be incorporated by reference to address the use of battery-powered lawn mowers. Finally, the petitioner argues that subsection 3563(b)(3) should be removed because the reference to the ANSI B71.1 and B71.4 standards is outdated, does not provide a safety benefit, and creates an undue burden on California employers.

3.0 APPLICABLE TITLE 8 REGULATIONS

California Code of Regulations, title 8, section 3563, of the General Industry Safety Orders addresses power lawn mowers and covers walk-behind reel and rotary lawn mowers, riding reel and rotary power lawn mowers, lawn riding tractors with mower attachments, and lawn and garden riding tractors with mower attachments.

Subchapter 7. General Industry Safety Orders
Group 3. General Plant Equipment and Special Operations
Article 20. Hand and Portable Powered Tools and Equipment

Section 3563. Power Lawn Mowers
(a) Scope. These regulations apply to power lawn mowers and cover walk-behind reel and rotary power lawn mowers, riding reel and rotary power lawn mowers, lawn riding tractors with mower attachments, and lawn and garden riding tractors with mower attachments. They are intended to provide safety requirements and to help ensure uniform operator environments. These regulations do not apply to sulky-type units, flail mowers, sickle bar mowers, or tractors as defined in Article 25 of these Orders unless the tractor is designed primarily for mowing lawns and manufactured in conformance with the ANSI B71.1 or B71.4 national consensus standards for power lawn mowers. Requirements for tractors and attachments used in mowing operations that are manufactured in conformance with the ANSI B71.1 and B71.4 standards are provided in this Section.

(b) General.
(1) Power lawn mowers placed in service after March 29, 1975 through April 15, 1999, shall meet the requirements of ANSI B71.1-1972 and B71.1a-1974 or ANSI B71.1-1980, Safety Specifications for Power Lawn Mowers, Lawn and Garden Tractors and Lawn Tractors, or shall meet the requirements of the applicable ANSI B71.1 or B71.4 standard in effect at the time the mower was manufactured.

(2) Power lawn mowers manufactured after April 15, 1999, shall meet the requirements of one of the following ANSI B71.1 or B71.4 standards, as

applicable, based on the mower design and date of manufacture. These ANSI standards are hereby incorporated by reference:

ANSI/OPEI B71.1-1998 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,

ANSI B71.1-2003 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,

ANSI/OPEI B71.4-1999 standard for Commercial Turf Care Equipment-Safety Specifications,

ANSI B71.4-2004 standard for Commercial Turf Care Equipment-Safety Specifications.

(3) Power lawn mowers manufactured after September 2, 2010, shall be affixed with a durable label stating that the power lawn mower is manufactured in accordance with the applicable ANSI B71.1 or B71.4 standard

(c) Roll-Over Protective Structures (ROPS) and Seat Belts. Effective March 1, 2011, when visual inspection or technical information from the manufacturer indicates that a riding lawn mower is designed by the manufacturer to be equipped with ROPS, or to accept ROPS as an option, ROPS engineered and approved for the mower shall be provided and used. Approved seat belt assemblies shall be provided and used on all riding lawn mowers where ROPS are installed.

Exception: The use of ROPS and seat belts may be temporarily suspended only when operating in areas where the vertical clearance is insufficient to allow a ROPS equipped mower to operate.

NOTE: The requirements for ROPS on agricultural and industrial tractors are provided in Article 25 of the General Industry Safety Orders.

(d) Prohibited use of Ride-on, Sit-down Lawn Mowers.
(1) Ride-on, sit-down lawn mowers shall not be used on slopes that exceed the angle limitation when specified by the manufacturer.
(2) When the manufacturer's instructions are not obtainable or do not specify the angle limits for operating ride-on, sit-down lawn mowers on sloped surfaces, a qualified person shall evaluate the terrain and slope conditions to ensure the mower is operated in a safe manner.
(3) Ride-on, sit-down lawn mowers shall not be operated in areas where the traction drive wheels, as measured from the outside wheel edge, are within 5 feet of the unprotected edges of retaining walls, embankments, levees, ditches, culverts, excavations or similar locations that present an overturn hazard.

(4) When it is necessary to operate a ride-on, sit-down mower near ponds, creeks, reservoirs, canals, sloughs, lakes, golf course water hazards and similar bodies of water, a qualified person shall evaluate the terrain and

any slope conditions to ensure the mower is operated at safe speeds and at safe distances from such hazards.

(e) Powered Lawn Mower Operator Training.
(1) Safe operation.
The employer shall ensure that each power lawn mower operator is competent to operate the mower safely, as demonstrated by the successful completion of the training and evaluation specified in this subsection. Prior to permitting an employee to operate a power lawn mower (except for training purposes), the employer shall ensure that each operator has successfully completed the training required by this subsection, except as permitted in subsection (e)(5).
(2) Training program implementation.
(A) All operator training and evaluation shall be conducted by qualified persons who have the knowledge, training and experience to train power lawn mower operators and evaluate their competence.
(B) Trainees may operate a power lawn mower only under the direct supervision of qualified persons provided that such operation does not endanger the trainee or other employees.
(C) Training shall consist of a combination of formal instruction (e.g., lecture, discussion, written material, audio visual material) and also include demonstrations by the trainer and practical exercises performed by the trainee and evaluation of the operator's performance.
(3) Training program content. Operators shall receive initial training to ensure that each employee who operates a power lawn mower has been provided training in the hazards associated with the operation of mowers and other topics necessary for the safe operation of mowers. Training shall include at least the following:
(A) Review of the manufacturer's operator's manual including operating instructions, warnings and precautions for the types of power lawn mowers the operator will be authorized to operate.
(B) Review of the operator controls and instrumentation for safe operation of the equipment.
(C) Review all safety devices to ensure guards and shields are kept securely in place.
(D) The importance of surveying the terrain for hazards prior to mowing to identify obstacles in the mowing path, such as large rocks, tree stumps, soft or wet spots, and the prohibited use areas for ride-on, sit-down mowers provided in subsection (d) of this section.
(E) Speed control, steering and maneuvering the mower.
(F) Review of stability and rollover hazards associated with operating riding lawn mowers on surfaces, terrains or areas such as, but not limited to loading ramps, wet surfaces, slopes, and areas near drop offs, retaining walls/embankments, water or ponds, unprotected ditches, culverts, or excavations.
(G) The use of ROPS and seatbelts for riding mowers that are equipped with ROPS.
(4) Refresher training and evaluation. Refresher training, including an evaluation of the effectiveness of that training, shall be conducted as required by this subsection to ensure that the operator has the knowledge and skills needed to operate the power lawn mower safely.

> Refresher training in relevant topics shall be provided to the operator when:
> (A) The operator has been observed to operate a mower in an unsafe manner;
> (B) The operator has been involved in an accident or near-miss incident;
> (C) The operator has received an evaluation that reveals that the operator is not operating a mower safely; or
> (D) The operator receives a new job assignment that includes operating a mower or machinery that the operator is unfamiliar with or includes mowing lawns on terrain or surfaces that present hazards unfamiliar to the operator in their current or past work assignments.
> (5) Avoidance of duplicative training. If an operator has previously received training in a topic specified in subsection (e)(3) of this section, and such training is appropriate for the type of power lawn mower authorized for use and the working conditions encountered, additional training in that topic is not required if the operator has been evaluated and found competent to operate the mower safely.
> (6) Recordkeeping. All safety instruction and training shall be documented in accordance with Section 3203 of the General Industry Safety Orders.
>
> Subchapter 7. General Industry Safety Orders
> Group 8. Point of Operation and Other Hazardous Parts of Machinery
> Article 54. Scope and General Definitions

Title 8 section 4184 in Group 8 of the General Industry Safety Orders addresses guarding of hazardous points of operation for machinery. Subsection 4184(b) requires guarding of points of operation not specifically covered under the Group 8 guarding orders which would include power mowers.

> Group 8. Points of Operation and Other Hazardous Parts of Machinery
> Article 54. Scope and General Definitions
> Section 4184. Guarding Required
>
> *****
> (b) All machines or parts of machines, used in any industry or type of work not specifically covered in Group 8, which present similar hazards as the machines covered under these point of operation orders, shall be guarded at their point of operation as required by the regulations contained in Group 8.
>
> *****

Article 4 of the title 8 Group 1 Low-Voltage Safety Orders includes multiple requirements for electrical installations operating from 50 to 600 volts. The following sections include requirements for conductors to be insulated, guarding of energized parts, protection from mechanical damage, and maintaining electrical equipment to be free of recognized hazards.

> Subchapter 5. Electrical Safety Orders
> Group 1. Low-Voltage Electrical Safety Orders
> Article 4. Requirements for Electrical Installations
>
> Section 2340.2. Examination, Installation, and Use of Equipment.

(a) Examination. Electric equipment shall be free from recognized hazards that are likely to cause death or serious physical harm to employees. Safety of equipment shall be determined using the following considerations:
(1) Suitability for installation and use in conformity with the provisions of these Orders; NOTE to subsection (a)(1): Suitability of equipment for an identified purpose may be evidenced by listing or labeling for that identified purpose.
(2) Mechanical strength and durability, including, for parts designed to enclose and protect other equipment, the adequacy of the protection thus provided;
(3) Wire-bending and connection space;
(4) Electrical insulation;
(5) Heating effects under all conditions of use;
(6) Arcing effects;
(7) Classification by type, size, voltage, current capacity, and specific use; and
(8) Other factors that contribute to the practical safeguarding of persons using or likely to come in contact with the equipment.
(b) Installation and use. Listed or labeled equipment shall be installed and used in accordance with any instructions included in the listing or labeling.

*****

Section 2340.5. Conductors.
(a) Insulation. All conductors used for general wiring shall be insulated unless otherwise permitted in these safety orders.
(b) Type. The conductor insulation shall be of a type that is approved for the voltage, operating temperature, and location of use.
(c) Distinguishable. Insulated conductors shall be distinguishable by appropriate color or other suitable means as being grounded conductors, ungrounded conductors, or equipment grounding conductors.

*****

§2340.17. Guarding of Energized Parts.
(a) Except as elsewhere required or permitted by these orders, energized parts of electric equipment operating at 50 volts or more shall be guarded against accidental contact by use of approved cabinets or other forms of approved enclosures or by any of the following means:
(1) By location in a room, vault, or similar enclosure that is accessible only to qualified persons.
(2) By suitable permanent, substantial partitions or screens so arranged that only qualified persons will have access to the space within reach of the energized parts. Any openings in such partitions or screens shall be so sized and located that persons are not likely to come into accidental contact with the energized parts or to bring conducting objects into contact with them.
(3) By location on a suitable balcony, gallery, or platform so elevated and otherwise located as to prevent access by unqualified persons; or
(4) By elevation of 8.0 feet (2.44 m) or more above the floor or other working surface.

Section 2340.26. Mechanical Protection.

In locations where electric equipment would be exposed to physical damage, enclosures or guards shall be so arranged and of such strength as to prevent such damage.

Article 11 of the title 8 Group 1 Low-Voltage Safety Orders addresses proper grounding of electrical equipment. Section 2395.59 includes the requirements for the noncurrent-carrying parts of cord-and-plug-connected equipment to be grounded.

Subchapter 5. Electrical Safety Orders
Group 1. Low-Voltage Electrical Safety Orders
Article 11. Grounding

Section 2395.59. Cord- and Plug-Connected Equipment.
Noncurrent-carrying metal parts of cord-and-plug-connected equipment, where required to be grounded, shall be grounded by one of the methods indicated in (a), (b), or (c) below:
(a) By means of the metal enclosure of the conductors supplying such equipment if grounding-type attachment plug with one fixed grounding contact is used for grounding the metal enclosure, and if the metal enclosure of the conductors is secured to the attachment plug and to equipment by connectors approved for the purpose.
(b) By means of a grounding conductor run with the power supply conductors in a cable assembly or flexible cord properly terminated in grounding-type attachment plug with one fixed grounding contact. An uninsulated grounding conductor shall be permitted but, if individually covered, the covering shall have a continuous outer finish that is either green or green with one or more yellow stripes.
(c) By means of a separate flexible wire or strap, insulated or bare, protected as well as practicable against physical damage, where part of an approved portable equipment.

*****

Section 2395.45. Equipment Connected by Cord and Plug.
(a) The exposed noncurrent-carrying metal parts of cord- and plug-connected equipment that may become energized shall be grounded under any of the following conditions:
(1) Utilization equipment used in hazardous (classified) locations (See Article 59).
(2) Any electric equipment which is operated at over 150 volts to ground.
(3) If the equipment is of the following types:
(A) Refrigerators, freezers, and air conditioners.
(B) Clothes-washing, clothes-drying and dishwashing machines, sump pumps, and electrical aquarium equipment.
(C) Hand-held motor-operated tools, stationary and fixed motor-operated tools, and light industrial motor-operated tools.
(D) Motor-operated tools and utilization equipment of the following types: drills, hedge clippers, lawn mowers, snow blowers, wet scrubbers, sanders and saws.

(E) Cord- and plug-connected appliances used in damp or wet locations or by persons standing on the ground or on metal or exposed concrete floors or working inside of metal tanks or boilers.
(F) Portable and mobile x-ray and associated equipment.
(G) Portable hand lamps.
(H) Tools likely to be used in wet and conductive locations.

Article 58.1 of the title 8 Group 1 Low-Voltage Safety Orders addresses safety of storage batteries. Section 2535.1 includes requirements for the diffusion and ventilation of storage batteries to prevent accumulation of explosive mixtures.

Subchapter 5. Electrical Safety Orders
Group 1. Low-Voltage Electrical Safety Orders
Article 58.1 Storage Batteries

*****
Section 2535.1 Storage Batteries

Provisions shall be made for sufficient diffusion and ventilation of gases from storage batteries to prevent the accumulation of explosive mixtures. See General Industry Safety Orders, Section 5185 for additional requirements.
*****

4.0 APPLICABLE FEDERAL OSHA REGULATIONS

The federal OSHA regulation 29 CFR 1910.243 has specific requirements for powered lawn mowers used by employees. 29 CFR 1910.212 has general machine guarding requirements applicable to all machines including powered lawn mowers.

Occupational Health and Safety Standards
1910 Subpart P
Hand and Portable Power Tools and Other Hand-Held Equipment
Standard Number 1910.243
Guarding of portable power tools

*****
1910.243(e)
Power lawnmowers

1910.243(e)(1)
General requirements.

1910.243(e)(1)(i)
Power lawnmowers of the walk-behind, riding-rotary, and reel power lawnmowers shall be guarded in accordance with the machine guarding requirements in 29 CFR 1910.212, General requirements for all machines.
1910.243(e)(1)(ii)
All power-driven chains, belts, and gears shall be so positioned or otherwise guarded to prevent the operator's accidental contact therewith, during normal starting, mounting, and operation of the machine.
1910.243(e)(1)(iii)

A shutoff device shall be provided to stop operation of the motor or engine. This device shall require manual and intentional reactivation to restart the motor or engine.
1910.243(e)(1)(iv)
All positions of the operating controls shall be clearly identified.
1910.243(e)(1)(v)
The words, "Caution. Be sure the operating control(s) is in neutral before starting the engine," or similar wording shall be clearly visible at an engine starting control point on self-propelled mowers.

1910.243(e)(2)
Walk-behind and riding rotary mowers.

1910.243(e)(2)(i)
The mower blade shall be enclosed except on the bottom and the enclosure shall extend to or below the lowest cutting point of the blade in the lowest blade position.
1910.243(e)(2)(ii)
Guards which must be removed to install a catcher assembly shall comply with the following:
1910.243(e)(2)(ii)(a)
Warning instructions shall be affixed to the mower near the opening stating that the mower shall not be used without either the catcher assembly or the guard in place.
1910.243(e)(2)(ii)(b)
The catcher assembly or the guard shall be shipped and sold as part of the mower.
1910.243(e)(2)(ii)(c)
The instruction manual shall state that the mower shall not be used without either the catcher assembly or the guard in place.
1910.243(e)(2)(ii)(d)
The catcher assembly, when properly and completely installed, shall not create a condition which violates the limits given for the guarded opening.
1910.243(e)(2)(iii)
Openings in the blade enclosure, intended for the discharge of grass, shall be limited to a maximum vertical angle of the opening of 30°. Measurements shall be taken from the lowest blade position.

1910.243(e)(2)(iv)
The total effective opening area of the grass discharge opening(s) shall not exceed 1,000 square degrees on units having a width of cut less than 27 1/2 inches, or 2,000 square degrees on units having a width of cut 27 1/2 inches or over.

1910.243(e)(2)(v)
The word "Caution." or stronger wording, shall be placed on the mower at or near each discharge opening.

1910.243(e)(2)(vi)
[Reserved]
1910.243(e)(2)(vii)

Blade(s) shall stop rotating from the manufacturer's specified maximum speed within 15 seconds after declutching, or shutting off power.
1910.243(e)(2)(viii)
In a multipiece blade, the means of fastening the cutting members to the body of the blade or disc shall be so designed that they will not become worn to a hazardous condition before the cutting members themselves are worn beyond use.
1910.243(e)(2)(ix)
The maximum tip speed of any blade shall be 19,000 feet per minute.
1910.243(e)(3)
Walk-behind rotary mowers.

1910.243(e)(3)(i)
The horizontal angle of the opening(s) in the blade enclosure, intended for the discharge of grass, shall not contact the operator area.
1910.243(e)(3)(ii)
There shall be one of the following at all openings in the blade enclosure intended for the discharge of grass:
1910.243(e)(3)(ii)(a)
A minimum unobstructed horizontal distance of 3 inches from the end of the discharge chute to the blade tip circle.
1910.243(e)(3)(ii)(b)
A rigid bar fastened across the discharge opening, secured to prevent removal without the use of tools. The bottom of the bar shall be no higher than the bottom edge of the blade enclosure.
1910.243(e)(3)(iii)
The highest point(s) of the front of the blade enclosure, except discharge openings, shall be such that any line extending a maximum of 15° downward from the horizontal toward the blade shaft axis (axes) shall not intersect the horizontal plane within the blade tip circle. The highest point(s) on the blade enclosure front, except discharge-openings, shall not exceed 1 1/4 inches above the lowest cutting point of the blade in the lowest blade position. Mowers with a swingover handle are to be considered as having no front in the blade enclosure and therefore shall comply with paragraph (e)(2)(i) of this section.

1910.243(e)(3)(iv)
The mower handle shall be fastened to the mower so as to prevent loss of control by unintentional uncoupling while in operation.
1910.243(e)(3)(v)
A positive upstop or latch shall be provided for the mower handle in the normal operating position(s). The upstop shall not be subject to unintentional disengagement during normal operation of the mower. The upstop or latch shall not allow the center or the handle grips to come closer than 17 inches horizontally behind the closest path of the mower blade(s) unless manually disengaged.
1910.243(e)(3)(vi)
A swing-over handle, which complies with the above requirements, will be permitted.
1910.243(e)(3)(vii)

Wheel drive disengaging controls, except deadman controls, shall move opposite to the direction of the vehicle motion in order to disengage the drive. Deadman controls shall automatically interrupt power to a drive when the operator's actuating force is removed, and may operate in any direction to disengage the drive.
1910.243(e)(4)
Riding rotary mowers.

1910.243(e)(4)(i)
The highest point(s) of all openings in the blade enclosure, front shall be limited by a vertical angle of opening of 15° and a maximum distance of 1 1/4 inches above the lowest cutting point of the blade in the lowest blade position.

1910.243(e)(4)(ii)
Opening(s) shall be placed so that grass or debris will not discharge directly toward any part of an operator seated in a normal operator position.
1910.243(e)(4)(iii)
There shall be one of the following at all openings in the blade enclosure intended for the discharge of grass:
1910.243(e)(4)(iii)(a)
A minimum unobstructed horizontal distance of 6 inches from the end of the discharge chute to the blade tip circle.
1910.243(e)(4)(iii)(b)
A rigid bar fastened across the discharge opening, secured to prevent removal without the use of tools. The bottom of the bar shall be no higher than the bottom edge of the blade enclosure.
1910.243(e)(4)(iv)
Mowers shall be provided with stops to prevent jackknifing or locking of the steering mechanism.
1910.243(e)(4)(v)
Vehicle stopping means shall be provided.
1910.243(e)(4)(vi)
Hand-operated wheel drive disengaging controls shall move opposite to the direction of vehicle motion in order to disengage the drive. Foot-operated wheel drive disengaging controls shall be depressed to disengage the drive. Deadman controls, both hand and foot operated, shall automatically interrupt power to a drive when the operator's actuating force is removed, and may operate in any direction to disengage the drive.

*****

Federal OSHA regulations address guarding of machinery and equipment in 29 CFR Subpart O of the General Industry Safety Orders. Section 1910.212 includes requirements for point-of-operation guarding.

Occupational Health and Safety Standards
1910 Subpart O
Machinery and Machine Guarding
Standard Number 1910.243
General requirements for all machines.

1910.212(a)
Machine guarding -

1910.212(a)(1)
Types of guarding. One or more methods of machine guarding shall be provided to protect the operator and other employees in the machine area from hazards such as those created by point of operation, ingoing nip points, rotating parts, flying chips and sparks. Examples of guarding methods are - barrier guards, two-hand tripping devices, electronic safety devices, etc.

*****

1910.212(a)(3)(ii)
The point of operation of machines whose operation exposes an employee to injury, shall be guarded. The guarding device shall be in conformity with any appropriate standards therefor, or, in the absence of applicable specific standards, shall be so designed and constructed as to prevent the operator from having any part of his body in the danger zone during the operating cycle.

Federal OSHA addresses requirements for electrical conductor and equipment in 29 CFR Subpart S of the General Industry Safety Orders. Section 1910.303 includes requirements for conductors to be insulated, guarding of energized parts, protection from mechanical damage, and maintaining electrical equipment to be free of recognized hazards among other requirements.

Occupational Health and Safety Standards
1910 Subpart S
Electrical
Standard Number 1910.303
General

1910.303(a)
Approval. The conductors and equipment required or permitted by this subpart shall be acceptable only if approved, as defined in § 1910.399.

1910.303(b)
Examination, installation, and use of equipment -

1910.303(b)(1)
Examination. Electric equipment shall be free from recognized hazards that are likely to cause death or serious physical harm to employees. Safety of equipment shall be determined using the following considerations:

1910.303(b)(1)(i)
Suitability for installation and use in conformity with the provisions of this subpart;

Note to paragraph (b)(1)(i) of this section: Suitability of equipment for an identified purpose may be evidenced by listing or labeling for that identified purpose.

1910.303(b)(1)(ii)

Mechanical strength and durability, including, for parts designed to enclose and protect other equipment, the adequacy of the protection thus provided;

1910.303(b)(1)(iii)
Wire-bending and connection space;

1910.303(b)(1)(iv)
Electrical insulation;

1910.303(b)(1)(v)
Heating effects under all conditions of use;

1910.303(b)(1)(vi)
Arcing effects;

1910.303(b)(1)(vii)
Classification by type, size, voltage, current capacity, and specific use; and

1910.303(b)(1)(viii)
Other factors that contribute to the practical safeguarding of persons using or likely to come in contact with the equipment.

1910.303(b)(2)
Installation and use. Listed or labeled equipment shall be installed and used in accordance with any instructions included in the listing or labeling.

1910.303(b)(3)
Insulation integrity. Completed wiring installations shall be free from short circuits and from grounds other than those required or permitted by this subpart.

1910.303(b)(4)
Interrupting rating. Equipment intended to interrupt current at fault levels shall have an interrupting rating sufficient for the nominal circuit voltage and the current that is available at the line terminals of the equipment. Equipment intended to interrupt current at other than fault levels shall have an interrupting rating at nominal circuit voltage sufficient for the current that must be interrupted.

1910.303(b)(5)
Circuit impedance and other characteristics. The overcurrent protective devices, the total impedance, the component short-circuit current ratings, and other characteristics of the circuit to be protected shall be selected and coordinated to permit the circuit protective devices used to clear a fault to do so without the occurrence of extensive damage to the electrical components of the circuit. This fault shall be assumed to be either between two or more of the circuit conductors, or between any circuit conductor and the grounding conductor or enclosing metal raceway.

1910.303(b)(6)
Deteriorating agents. Unless identified for use in the operating environment, no conductors or equipment shall be located in damp or wet locations; where exposed to gases, fumes, vapors, liquids, or other agents that have a

deteriorating effect on the conductors or equipment; or where exposed to excessive temperatures.

*****

Federal OSHA regulations address use of electrical equipment in 29 CFR Subsection S of the General Industry Safety Orders. Subsection 1910.334(a) includes requirements for the use of portable equipment including the attachment, grounding, and inspection among other requirements for portable electric equipment including cord-and-plug connected equipment.

Occupational Health and Safety Standards
1910 Subpart S
Electrical
Standard Number 1910.334
Use of Equipment

1910.334(a)
Portable electric equipment. This paragraph applies to the use of cord- and plug-connected equipment, including flexible cord sets (extension cords).

1910.334(a)(1)
Handling. Portable equipment shall be handled in a manner which will not cause damage. Flexible electric cords connected to equipment may not be used for raising or lowering the equipment. Flexible cords may not be fastened with staples or otherwise hung in such a fashion as could damage the outer jacket or insulation.
1910.334(a)(2)
Visual inspection.
1910.334(a)(2)(i)
Portable cord- and plug-connected equipment and flexible cord sets (extension cords) shall be visually inspected before use on any shift for external defects (such as loose parts, deformed and missing pins, or damage to outer jacket or insulation) and for evidence of possible internal damage (such as pinched or crushed outer jacket). Cord- and plug-connected equipment and flexible cord sets (extension cords) which remain connected once they are put in place and are not exposed to damage need not be visually inspected until they are relocated.

1910.334(a)(2)(ii)
If there is a defect or evidence of damage that might expose an employee to injury, the defective or damaged item shall be removed from service, and no employee may use it until repairs and tests necessary to render the equipment safe have been made.
1910.334(a)(2)(iii)
When an attachment plug is to be connected to a receptacle (including any on a cord set), the relationship of the plug and receptacle contacts shall first be checked to ensure that they are of proper mating configurations.

1910.334(a)(3)
Grounding-type equipment.

1910.334(a)(3)(i)

A flexible cord used with grounding-type equipment shall contain an equipment grounding conductor.

1910.334(a)(3)(ii)
Attachment plugs and receptacles may not be connected or altered in a manner which would prevent proper continuity of the equipment grounding conductor at the point where plugs are attached to receptacles. Additionally, these devices may not be altered to allow the grounding pole of a plug to be inserted into slots intended for connection to the current-carrying conductors.
1910.334(a)(3)(iii)
Adapters which interrupt the continuity of the equipment grounding connection may not be used.
1910.334(a)(4)
Conductive work locations. Portable electric equipment and flexible cords used in highly conductive work locations (such as those inundated with water or other conductive liquids), or in job locations where employees are likely to contact water or conductive liquids, shall be approved for those locations.

1910.334(a)(5)
Connecting attachment plugs.
1910.334(a)(5)(i)
Employees' hands may not be wet when plugging and unplugging flexible cords and cord- and plug-connected equipment, if energized equipment is involved.

1910.334(a)(5)(ii)
Energized plug and receptacle connections may be handled only with insulating protective equipment if the condition of the connection could provide a conducting path to the employee's hand (if, for example, a cord connector is wet from being immersed in water).
1910.334(a)(5)(iii)
Locking-type connectors shall be properly secured after connection.

1910.334(b)
Electric power and lighting circuits -

1910.334(b)(1)
Routine opening and closing of circuits. Load rated switches, circuit breakers, or other devices specifically designed as disconnecting means shall be used for the opening, reversing, or closing of circuits under load conditions. Cable connectors not of the load-break type, fuses, terminal lugs, and cable splice connections may not be used for such purposes, except in an emergency.

1910.334(b)(2)
Reclosing circuits after protective device operation. After a circuit is deenergized by a circuit protective device, the circuit may not be manually reenergized until it has been determined that the equipment and circuit can be safely energized. The repetitive manual reclosing of circuit breakers or reenergizing circuits through replaced fuses is prohibited.

Note: When it can be determined from the design of the circuit and the overcurrent devices involved that the automatic operation of a device was caused by an overload rather than a fault condition, no examination of the circuit or connected equipment is needed before the circuit is reenergized.
1910.334(b)(3)
Overcurrent protection modification. Overcurrent protection of circuits and conductors may not be modified, even on a temporary basis, beyond that allowed by § 1910.304(e), the installation safety requirements for overcurrent protection.

1910.334(c)
Test instruments and equipment -

1910.334(c)(1)
Use. Only qualified persons may perform testing work on electric circuits or equipment.
1910.334(c)(2)
Visual inspection. Test instruments and equipment and all associated test leads, cables, power cords, probes, and connectors shall be visually inspected for external defects and damage before the equipment is used. If there is a defect or evidence of damage that might expose an employee to injury, the defective or damaged item shall be removed from service, and no employee may use it until repairs and tests necessary to render the equipment safe have been made.
1910.334(c)(3)
Rating of equipment. Test instruments and equipment and their accessories shall be rated for the circuits and equipment to which they will be connected and shall be designed for the environment in which they will be used.
1910.334(d)
Occasional use of flammable or ignitible materials. Where flammable materials are present only occasionally, electric equipment capable of igniting them shall not be used, unless measures are taken to prevent hazardous conditions from developing. Such materials include, but are not limited to: flammable gases, vapors, or liquids; combustible dust; and ignitible fibers or flyings.

Note: Electrical installation requirements for locations where flammable materials are present on a regular basis are contained in § 1910.307.

5.0 APPLICABLE CONSENSUS STANDARDS

5.1 ANSI AND ANSI/OPEI STANDARDS

Numerous ANSI standards apply to lawn mowers. The ANSI B71.1 and B71.4 standards incorporated by title 8 section 3563 provide safety requirements for consumer and commercial turf care equipment. The ANSI/OPEI standard editions from 1998 to 2017 are listed below and are included in Attachments 1-6 of this evaluation.

- ANSI B71.1-1998 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,
- ANSI B71.1-2003 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications

- ANSI B71.1-2012 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,
- ANSI/OPEI B71.1-2017 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,
- ANSI B71.4-1999 standard for Commercial Turf Care Equipment-Safety Specifications,
- ANSI B71.4-2004 standard for Commercial Turf Care Equipment-Safety Specifications.
- ANSI/OPEI B71.4-2012 standard for Commercial Turf Care Equipment Safety Specifications
- ANSI/OPEI B71.4-2017 standard for Commercial Turf Care Equipment-Safety Specifications.

The ANSI/OPEI 5395 standards proposed by the petitioner include safety requirements for pedestrian-controlled and ride-on combustion-engine-powered lawnmowers. The 2024 editions of the 5395-1, 5395-2, and 5395-3 standards are listed below and are included in Attachments 7-9 of this evaluation.

- ANSI/OPEI 5395-1-2024 safety requirements for Combustion-Engine-Powered Lawnmowers-Part 1 Terminology and Common Tests
- ANSI/OPEI 5395-2-2024 standard for Combustion-Engine-Powered Lawnmowers – Part 2: Pedestrian-Controlled Lawnmowers
- ANSI/OPEI 5395-3-2024 standard for Combustion-Engine-Powered Lawnmowers – Part 3: Ride-On Lawnmowers

5.2 ANSI/OPEI B71.1/B71.4 STANDARDS vs. ANSI/OPEI 5395 STANDARDS

The ANSI/OPEI B71.1 and B71.4 differ from the later ANSI/OPEI 5395-2024 standards in that the 2024 standard applies to both consumer (residential) and commercial equipment whereas ANSI/OPEI B71.1 (consumer) and ANSI/OPEI B71.4 (commercial) treated these separately.

ANSI/OPEI 5395 and its two companion standards provide requirements separately as Part 1, terminology and common tests; Part 2, pedestrian-controlled lawnmowers; and Part 3, ride-on lawnmowers, whereas ANSI/OPEI B71.1 and B71.4 cover these requirements together. The ANSI/OPEI 5395-2024 standards are also harmonized with international ISO standards. As such, the testing requirements for lawnmowers conform to ISO testing procedures. Additionally, electrically powered and battery-powered lawnmowers are excluded from the scope of ANSI/OPEI 5395-2-2024 and ANSI/OPEI 5395-3-2024, whereas such equipment is included in the ANSI/OPEI B71.1 and B71.4 standards.

5.3 UNDERWRITERS LABORATORIES (UL) STANDARDS

Underwriters Laboratories (UL) standards address safety for electric lawn mowers in the 1447, 2753 and 62841 standards. The standards germane to this petition evaluation are as follows and are included as Attachments 10-12 of this evaluation:

- UL 1447-2006 Electric Lawn Mowers
- UL 2753 Issue No. 2-2018 Battery Powered Ride-On Lawn
- UL 62841-4-3-2023 Particular Requirements for Pedestrian Controlled Walk-Behind Lawn Mowers

6.0 Cal/OSHA ANALYSIS

6.1 ANSI/OPEI 5395-2024 STANDARDS PROPOSED BY THE PETITIONER ARE LESS PROTECTIVE THAN ANSI/OPEI B71.1-2017 AND ANSI/OPEI B71.4-2017


There are multiple requirements in the ANSI/OPEI 5395-2024 standards that are less protective than the ANSI/OPEI B71.1-2017 and ANSI/OPEI B71.4-2017 standards currently referenced in title 8. The following are discrepancies identified between the standards.

Section 4.2 of ANSI/OPEI B71.1-2017 requires a shutoff control device to stop the engine and explicitly requires manual and intentional activation in order to restart it. In contrast, Section 4.2.4 of ANSI/OPEI 5395-2 allows the engine-stopping device to be integrated into the operator presence control (OPC) and does not explicitly mandate a separate intentional activation to restart the engine. This integration could allow the mower to be restarted without a distinct, deliberate safety step, making it less protective than the current title 8 reference.

Section 6.1 of ANSI/OPEI B71.1-2017 requires specific written instructions recommended by the manufacturer to be provided with the equipment for servicing operations that shall be performed with the engine running. Additionally, section 6.2 requires that access doors, shields, or guards be provided to prevent inadvertent operator contact with hazardous servicing points. ANSI/OPEI 5395-2 does not require specific instructions for servicing operations when the engine is running or equivalent guarding as ANSI/OPEI B71.1-2017.

Section 6.3 of ANSI/OPEI B71.1-2017 provides a guideline that stored-energy devices, such as pressurized fluid systems and spring-loaded mechanisms that can be disconnected or disassembled in a manner that may release energy or material in a hazardous manner, have an appropriate safety sign on or near the device. Additionally, Section 6.3 requires that the sign include instructions for de-energizing and for proper disassembly, or include a reference to instructions provided in the operator's manual. Such safety signage is not required for stored-energy devices under ANSI/OPEI 5395-2. An identical signage guideline is included in Section 17.2 of ANSI/OPEI B71.4-2017 but is not included in ANSI/OPEI 5395-3.


Section 10.1.3 of ANSI/OPEI B71.1-2017 requires discharge openings be so placed or guarded that grass, or debris will not discharge directly into the operator zone, as shown in Figures 2 and 3 below. Additionally, this section requires that the tangential extension of the walls of the discharge chute not intersect the operator zone when the mower is set at any height of cut and that no tangential line in the plane of the blade tip circle shall intersect the operator zone without first contacting the blade enclosure or guard. These discharge requirements are not present in ANSI/OPEI 5395.

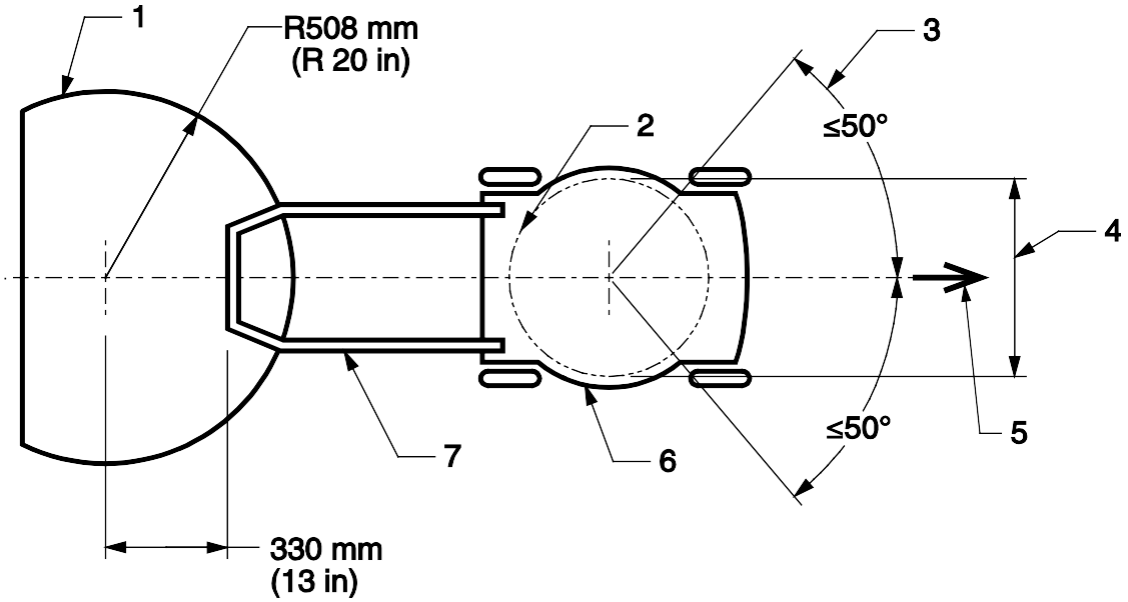

Key:

1 Operator zone
2 Blade tip circle
3 Limits of blade enclosure, front
4 Width of cut
5 Direction of travel
6 Blade enclosure
7 Handle, against upstop

Figure 2 – Single-spindle pedestrian-controlled mower

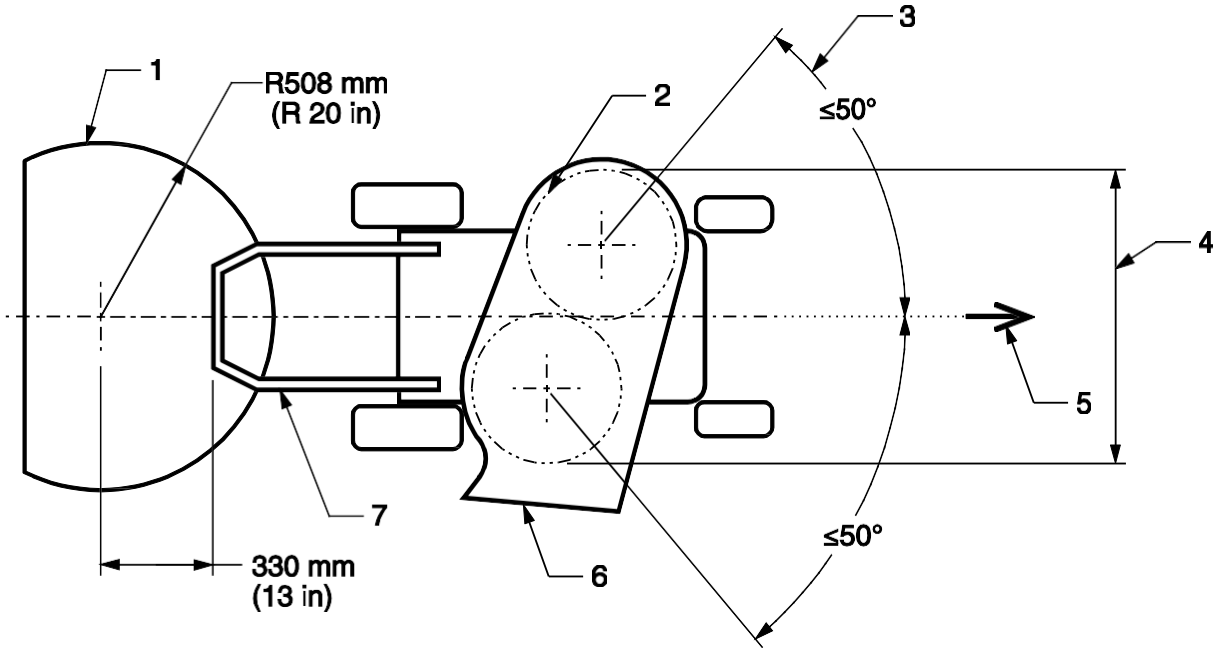

Key:

1 Operator zone
2 Blade tip circle
3 Limits of blade enclosure, front
4 Width of cut
5 Direction of travel
6 Blade enclosure
7 Handle, against upstop

Figure 3 – Multi-spindle pedestrian-controlled mower

The ANSI/OPEI B71.1-2017 standard also provides a greater degree of safety for objects thrown from mowers. Pursuant to Table 3 of Section 10.3.7.5.3 below, non-discharge mowers shall allow no more than an average of 30 total hits between the base and the 450 mm (18 in) line.

ANSI/OPEI B71.1-2017

10.3 Performance Tests
*****
10.3.7.5.3 All other mowers
For all other mowers, there shall be no more than an average of 30 hits between
the base and the 450 mm (18 in) line (lower and middle elevation zones) of which
not more than six may hit the target above the 300 mm (12 in) line (middle elevation zone). There shall be no hits above the 450 mm (18 in) line (top elevation zone). There shall be not more than two hits in the operator target zone
between the base and the 450 mm (18 in) line in accordance with Table 3. The average hits in any zone shall not exceed the number noted.

Table 3 – Average hits in any zone

Target Zone	Discharge Mowers	All Other Mowers
Total 0 – 450 mm (0 – 18 in)	45	30
300 > 450 mm (12 > 18 in)	6	6
450 > 900 mm (18 > 35.4 in)	0	0
Operator Target Area (above 450 mm (18 in))	0	0
Operator Target Area (0 – 450 mm (0 – 18 in))	2	2

*****

ANSI/OPEI 5395-2-2024 permits 40 total hits between 0 and 450 mm in the target zone, as indicated in Table 2 of Section 5.5.

ANSI/OPEI 5395-2-2024

*****
5.5 Thrown objects
The cutting-means enclosure, guards and grass catchers shall be designed and constructed in such a way as to minimize the risk of thrown objects in normal use. *Compliance shall be verified according to the test of* ANSI/OPEI 5395-1:2024, Annex E. The number of hits in any zone shall not exceed the value shown in Table 2. On multi-spindle lawnmowers, the total hits for each spindle shall be added together and divided by the number of spindles to obtain an average number of hits which is used for test acceptance. Only balls passing completely through all the layers of the panel material shall be considered as hits.

Table 2 – Permissible hits from thrown object test

Target zone as defined in ANSI/OPEI 5395-1:2024, Annex E	**Maximum number of hits allowed with width of cut less than 1,200 mm (47.2 in) and with no discharge opening**	**Maximum number of hits allowed with width of cut greater than 1,200 mm (47.2 in) and with no discharge opening**	**Maximum number of hits allowed with any width of cut and with discharge opening**
From 0 mm to 450 mm (0 in to 18.0 in)	30	40	45
of which from 300 mm to 450 mm (12.0 in to 18.0 in)	6	6	6
From 450 mm to 900 mm (18.0 in to 36.0 in)	0	0	0

*****

This same discrepancy also exists between Table 3 of Section 11.4.6.6 of ANSI/OPEI B71.4-2017 and Table 2 of Section 5.5 of ANSI/OPEI 5395-3-2024, which allow 30 and 40 total hits, respectively, in the 0-450 mm thrown-object target zone.

ANSI/OPEI B71.4-2017

11.4 Tests for mowers except those with a blade tip circle diameter of 775 mm (30.5 in) or greater and blade thickness of 8 mm (0.312 in) or greater, for one or more blades

*****

11.4.6.6.1 On multi-spindle mowers, a test (500 projectiles) shall be run for each spindle. The total hits for each spindle shall be added together and divided by the number of spindles to obtain an average number of hits that is used for test acceptance.

For discharge mowers, there shall be an average of no more than 45 hits between the base and the 450 mm (17.7 in) line (lower and middle elevation zones) of which not more than six (6) may be above the 300 mm (11.8 in) line (middle elevation zone). There shall be no hits above the 450 mm (17.7 in) line(top elevation zone).

There shall be not more than two hits in the operator target zone between the base and the 450 mm (17.7 in) line.

For all other mowers, there shall be an average of no more than 30 hits between the base and the 450 mm (17.7 in) line (lower and middle elevation zones) of which not more than six (6) may hit the target above the 300 mm

(11.8 in) line (middle elevation zone). There shall be no hits above the 450 mm (17.7 in) line (top elevation zone).

The average hits in any zone shall not exceed the number in Table 3.

Table 3 - Average allowable number of hits

Target Zone	Discharge Mowers	All other Mowers
Total 0 - 450 mm (0 – 17.7 in)	45	30
300 > 450 mm (11.8 > 17.7 in)	6	6
450 > 900 mm (17.7 > 35.4 in)	0	0
Operator Target Area for Mowers below 450 mm (17.7 in)	2	2
Operator Target Area for Mowers above 450 mm (17.7 in)	0	0

ANSI/OPEI B71.1-2017 also includes more protective requirements for safety warnings for mowers. Sections 13.3 and 24.1.5 require safety labels to comply with section 1205 of the Consumer Product Safety Commission (CPSC) requirements. Subsection 1205.6 requires warning labels to be at least 3.25 in (82.5 mm) in height and 4 in (102 mm) in width.

Section 24.1.5 also requires a safety pictorial warning of blade contact to be placed on the mower at or near each discharge opening, or on the discharge chute extension or deflector if it automatically returns to the guarded position after any movement from that position. The ANSI/OPEI 5395-2024 standards, however, do not specify the location of the pictorial safety warning at the discharge opening or chute. Section 24.1.5 as well as section 13.3 also require the signal word to read DANGER and that the warning conform to the requirements of ANSI Z535.4, ISO 11684, or the Consumer Product Safety Commission CPSC requirements of section 1205. Subsection 1205.6 requires warning labels to be at least 3.25 in. (82.5 mm) in height and 4 in. (102 mm) in width. However, section 7.2.2 allows for warning labels 0.01 in. (0.3 mm) in height.

Replacing the currently referenced standards with the ANSI/OPEI 5395 series would create a significant regulatory gap for non-combustion equipment. ANSI/OPEI 5395-2-2024 and ANSI/OPEI 5395-3-2024 explicitly exclude electrically powered and battery-powered lawnmowers from their scope. In contrast, the ANSI/OPEI B71.1 and B71.4 standards currently required by title 8 section 3563 include both electric and battery-powered mowers within their safety requirements.

Because the ANSI/OPEI 5395 standards do not cover battery or electric mowers, adopting them would strip existing consensus standard protections from an increasingly common class of equipment. While the petitioner proposed incorporating separate Underwriters Laboratories (UL) standards to cover battery-powered mowers, those UL standards are less protective than existing title 8 Electrical Safety Orders. Consequently, substituting the comprehensive B71 series with the narrower 5395 series would

leave non-combustion mowers without adequate safety specifications and reduce overall worker protection.

6.2 Incorporating The ANSI/OPEI 5395 Standards Would Require Referencing Two Different Standards and Would Not Provide a Significant Benefit for Safety

Certain provisions of the ANSI/OPEI 5395 standards provide additional or more stringent requirements than those in the ANSI B71.1 and B71.4 standards. These provisions include, but are not limited to, a faster stopping time for mower blades, requirements for sulky attachments[1], and testing protocols for noise attachments. However, these requirements would not significantly increase worker safety, are addressed by current title 8 regulations, and would require references to two different standards that apply to the same equipment. This would create confusion and an added layer of complexity for employers and Cal/OSHA staff in determining compliance with title 8 regulations.

6.3 Referencing UL Standards Would Be Less Protective Than Title 8 Regulations

The incorporation of Underwriters Laboratories (UL) standards proposed by the petitioner (UL 1447-2017, UL 2753-2018, and UL 62841-4-3-2023) would reduce worker safety because the requirements are less effective than current title 8 regulations. Electric lawn mowers operate at electric potentials between 40 and 80 volts, with the most common voltage being 60 volts. Title 8 Low-Voltage Safety Orders apply to electrical equipment operating between 50 and 600 volts. Therefore, most electric lawn mowers would fall within the scope of the title 8 Group 1 Low-Voltage Safety Orders in addition to the General Industry Safety Orders. The UL standards proposed by the petitioner include requirements to reduce risks rather than eliminate hazards, whereas the applicable title 8 regulations (such as section 2340.2) requires hazards likely to cause death or serious physical harm to be eliminated. Below are instances where the UL 1447, UL 2753 and UL 6284-4-3 standards are less protective than the existing title 8 regulations.

```
Underwriters Laboratories 1447, Electric Lawn Mowers—2017

*****
5.17 Polymeric materials and enclosures

*****

5.19.7 Portions of a circuit comprised of a microcontroller or other
programmable device that performs a back-up, limiting, or other safety
function intended to reduce the risk of fire, electric shock, or injury to
persons shall comply with Controls Using Software requirements in UL 60730-1.


*****
7 Accessibility of Live Parts
7.1 Electrical parts of a lawn mower shall be located or enclosed to reduce
the likelihood of unintentional contact with uninsulated live parts.
Insulated brush caps do not require additional enclosure.
```

[1] Sulky attachments are platforms or wheeled carts that attach to a commercial walk-behind lawn mower, turning it into a stand-on riding machine.

*****

8 Accessibility of Moving Parts

8.1 Moving parts shall be guarded or enclosed to reduce the risk of injury to persons.

8.2 Among the factors to be considered when judging the acceptability of an exposed moving part are:

a) Degree of exposure;
b) Sharpness of the moving part;
c) The likelihood of unintentional contact therewith;
d) The speed of the moving part; and
e) The likelihood that fingers, arms, or feet would be exposed to a risk of injury to persons by the moving part or that clothing would be caught by the part.

*****

11 Rotating Parts

11.1 A rotating part shall be formed and assembled so that it has the strength and rigidity necessary to reduce the risk of its release or loosening in a manner that may cause injury to persons.

*****

18.4 Protective controls (limiting controls)

18.4.1 An electronic control that performs a protective function shall comply with the requirements in Controls, Section 5.6, while tested using the parameters in this section. Examples of protective controls include:

a) A control used to sense abnormal temperatures of components within the appliance;
b) An interlock function to de-energize a motor;
c) Temperature protection of the motor due to locked rotor, running overload, or loss of phase; or
d) Other function intended to reduce the risk of electric shock, fire, or injuries to persons.

*****

20 Capacitors

20.1 A capacitor provided as a part of a capacitor motor, and a capacitor connected across the line, such as a capacitor for radio-interference suppression, shall be housed within a suitable enclosure or container that protects the plates against mechanical damage and that reduces the risk of the emission of flame or molten material resulting from breakdown or malfunction of the capacitor. The enclosure shall be made of metal providing strength and protection not less than that of sheet steel having a thickness of 0.020 inch (0.51 mm).

*****

54 Cautionary Markings

*****

54.3 If complete guarding of a moving part capable of causing injury to persons would defeat the intended function of the lawn mower, cautionary markings shall be provided to instruct the user how to reduce the risk of injury unless the risk is apparent to the user.

54.4 If the intended operation of a lawn mower contemplates cleaning or servicing by the user, such as the replacement of a pilot lamp, and if such cleaning or servicing would expose an otherwise enclosed or guarded live part to unintentional contact, the lawn mower shall be marked to indicate that such servicing or cleaning is to be done with the lawn mower disconnected from the supply circuit to reduce the risk of electric shock.

*****

55 Instruction Manual

*****

55.2.1 The instruction manual shall include a safety instruction Section A or Section B, whichever is appropriate, and the applicable items of Section C of the following warning instructions, or the equivalent. The phrases "Read All Instructions" and "SAVE THESE INSTRUCTIONS" shall appear and shall be the first and last items, respectively. The phrase "Read All Instructions" shall be preceded by the statement "WARNING: When using electric lawn mowers, basic safety precautions should always be followed to
reduce the risk of fire, electric shock, and personal injury, including the following:" Equivalent wordings in equally definitive terminology are not prohibited from being used when they meet the intent of the instruction, except for the signal word. The instructions shall be legible, and shall contrast with the background.

*****

SUPPLEMENT SA - BATTERY-OPERATED LAWN MOWERS

*****

SA2 Construction and Performance

*****

SA2.4 An integral battery shall be completely enclosed in order to reduce the likelihood of accidental contact. The cover of the integral battery compartment shall be securely fastened so that it remains closed during intended use.

SA2.5 The integral battery of a battery-powered lawn mower shall be encased or enclosed to reduce the likelihood of breakage of the battery case and the risk of an explosion. See Integral Battery Enclosure Test,

*****

SA3 Integral Battery Enclosure Test

SA3.1 The surface of an integral battery enclosure shall have such strength and rigidity that, in conjunction with an air spacing provided between it and the battery terminals, the battery terminals will not be short-circuited and no part will be exposed that might result in a short circuit when 250 pounds-force (112 N) is applied to the surface. In lieu of the spacing, insulation that reduces the likelihood of short circuiting of the battery terminals may be used, provided the insulation is secured to the inner surface of a battery enclosure.

*****

Underwriters Laboratory 2753 Issue No. 2 – 2018

*****

5 Components

*****

5.9 Overcurrent protection

*****

5.9.5 Overcurrent protection of the size necessary to reduce the likelihood of overheating of the smallest conductor in the circuit. A fuse shall comply with UL 248 series of standards, UL 275 and UL 275A and shall be found suitable for the intended application:

*****

6 General

*****

6.2 All current-carrying parts of a ride-on lawn mower shall be constructed and enclosed so as to reduce the likelihood of mechanical damage and to resist the abuses to which they may be subjected.

*****

7 Electric Controls

*****

7.1 An arcing part in a power circuit shall be enclosed or installed so as to reduce the possibility of flame or molten metal reaching surrounding combustible material on the ride-on lawn mower.

*****

10 Battery Compartment or Enclosure

*****

10.3 A metal cover for a compartment or separate enclosure that houses a battery shall have:

a) Such strength and rigidity that, in conjunction with an air spacing provided between it and

the battery terminals, the battery terminals are not short-circuited when a 250-pound (1110-N)
force is applied to any 1-square-foot (930-cm2) area of the cover; or
b) Insulation secured to the inner surface of a metal enclosure over the terminals to reduce the
likelihood of short-circuiting of the battery terminals.

*****

11 Battery

*****

11.3 Battery Connectors

*****

11.3.3 Live parts shall be recessed from the face of the connector to reduce the possibility of shorting.

Underwriters Laboratory 62841-4-3 – 2023

*****

8 Marking and instructions

*****

8.2 *Addition:*
Lawnmowers shall be marked with the following safety warnings:
– " WARNING – Beware of thrown objects – keep bystanders away" or one of the safety signs specified
in Figure AA.1;

*****

8.2DV.1 Lawnmowers shall be marked with a safety warning in one of the following
versions:
– " WARNING – To reduce the risk of injury, user must read instruction manual", or
symbol M002 of ISO 7010.

If used, the word "WARNING" shall be in capital letters not less than 2,4 mm high and shall
not be separated from either the cautionary statement or the symbol ISO 7000-0434A or
ISO 7000-0434B (2004-01).

*****

In contrast to the UL standards, which incorporate language to "reduce the risk, likelihood, or possibility" of a hazard, title 8 regulations, such as those included in Section 3.0 of this evaluation, prescribe requirements to eliminate hazards rather than merely reduce them. Including the UL standards proposed by the petitioner would, therefore, reduce the effectiveness of title 8 regulations and worker safety. Additionally, the UL 62841-4-3–2023 allows for warning labels for pedestrian controlled mowers of only 2.4 mm in height in contrast to the 3.25 in (82.5 mm) minimum height required by ANSI/OPEI B71.1-2017.

7.0 CONCLUSION

Cal/OSHA recommends that Petition 614 be DENIED.

- ANSI/OPEI 5395 standards are less-protective that current requirements.
- The ANSI/OPEI standards recommended to be incorporated would create overlapping requirements without safety benefit.
- The proposed UL standards are less protective than the title 8 Electrical Safety Orders.

If the Board decides to proceed with rulemaking on the proposed petition, Cal/OSHA recommends convening an advisory committee comprised of representatives from labor, lawn mower manufacturers, and ANSI/OPEI and UL standards committee members to properly reconcile the differing requirements between the consensus standards and title 8 regulations.

cc: Debra Lee, Cal/OSHA Chief

From:	Dan Mustico
To:	DIR OSHSB
Cc:	Money, Sarah@DIR
Subject:	OPEI petition for revision/amendment of Title 8 - §3563. Power Lawn Mowers.
Date:	Friday, April 17, 2026 8:16:32 AM
Attachments:	OPEI-5395-026 (www_dir_ca_gov_title8_3563).docx

CAUTION: [External Email]
This email originated from outside of our DIR organization. Do not click links or open attachments unless you recognize the sender and know the content is expected and is safe. If in doubt reach out and check with the sender by phone.

To whom it may concern:

Please accept this as a written petition for consideration of the revision/amendment of Title 8 - §3563. Power Lawn Mowers.

The attached MSWord document is text of the affected code clause, with our proposed changes highlighted to include updates to current voluntary standards.

As background, OPEI is the national trade association for lawn mower manufacturers and in that role serves as the industry's American National Standards Institute accredited standards development organization, including the role of facilitator of U.S. participation in the development of international voluntary standards through both ISO and IEC.

Please confirm if this information is sufficient to initiate the petition process, or if further/different information is necessary, and what the next steps will likely be and a general timeframe. Thank you for the consideration.

Daniel J. Mustico
Senior Vice President, Government & Market Affairs
Outdoor Power Equipment Institute, Inc.
1605 King Street, 3rd Floor
Alexandria, VA 22314
Direct: (703) 678-2990
Main: (703) 549-7600
Cell: (202) 957-9323
e-mail: dmustico@opei.org

Stay up to date with all our latest news - sign up for our enewsletter today!

Email Disclaimer:
Please be informed that this email and any materials attached herewith may contain confidential or legally privileged information that is intended solely for the use by its named recipient. If you have received this email in error, please notify us immediately by reply email and delete this email from your system. Any disclosure, use, copying, printing, distribution or reliance upon the contents of this email is strictly prohibited.

Legend for Document Accessibility:

Text in single underline is proposed new text.
Text in single strikeout is deleted text.

To represent the start of single underline text [begin underline] will be used and to represent the end of single underline text [end underline] will be used.

To represent the start of single strikeout text [begin strikeout] will be used and to represent the end of single strikeout text [end strikeout] will be used.

---

§3563. Power Lawn Mowers.

(a) Scope. These regulations apply to power lawn mowers and cover walk-behind reel and rotary power lawn mowers, riding reel and rotary power lawn mowers, lawn riding tractors with mower attachments, and lawn and garden riding tractors with mower attachments. They are intended to provide safety requirements and to help ensure uniform operator environments. These regulations do not apply to sulky-type units, flail mowers, sickle bar mowers, or tractors as defined in Article 25 of these Orders unless the tractor is designed primarily for mowing lawns and manufactured in conformance with the [begin underline] applicable standards in clause (b) below. [end underline] [begin strikeout] ~~ANSI B71.1 or B71.4 national consensus standards for power lawn mowers. Requirements for tractors and attachments used in mowing operations that are manufactured in conformance with the ANSI B71.1 and B71.4 standards are provided in this Section.~~ [end strikeout]

(b) General.

(1) Power lawn mowers placed in service after March 29, 1975 through April 15, 1999, shall meet the requirements of ANSI B71.1-1972 and B71.1a-1974 or ANSI B71.1-1980, Safety Specifications for Power Lawn Mowers, Lawn and Garden Tractors and Lawn Tractors, or shall meet the requirements of the applicable ANSI B71.1 or B71.4 standard in effect at the time the mower was manufactured.

(2) Power lawn mowers manufactured after April 15, 1999, shall meet the requirements of one of the following ANSI [begin underline] /OPEI [end underline] B71.1 or B71.4 standards [begin underline], or ANSI/OPEI 5395-2, 5395-3, or UL 62841-4-3, 1447, 2753, [end underline] as applicable, based on the mower design and date of manufacture. These [begin strikeout] ~~ANSI~~ [end strikeout] standards are hereby incorporated by reference:

ANSI/OPEI B71.1-1998 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,

ANSI [begin underline] /OPEI [end underline] B71.1-2003 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,

[begin underline] ANSI/OPEI B71.1-2012 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications,

ANSI/OPEI B71.1-2017 standard for Consumer Turf Care Equipment-Walk-Behind Mowers and Ride-On Machines with Mowers-Safety Specifications, [end underline]

ANSI/OPEI B71.4-1999 standard for Commercial Turf Care Equipment-Safety Specifications,

ANSI [begin underline] /OPEI [end underline] B71.4-2004 standard for Commercial Turf Care Equipment-Safety Specifications.

[begin underline] ANSI/OPEI B71.4-2012 standard for Commercial Turf Care Equipment-Safety Specifications.

ANSI/OPEI B71.4-2017 standard for Commercial Turf Care Equipment-Safety Specifications.

ANSI/OPEI 5395-2-2024 standard for Combustion-Engine-Powered Lawnmowers – Part 2: Pedestrian-Controlled Lawnmowers

ANSI/OPEI 5395-3-2024 standard for Combustion-Engine-Powered Lawnmowers – Part 3: Ride-On Lawnmowers

UL 62841-4-3-2023 standard for Electric Motor-Operated Hand-Held Tools, Transportable Tools and Lawn and Garden Machinery – Safety – Part 4-3: Particular Requirements for Pedestrian Controlled Walk-Behind Lawnmowers

UL 1447-2017 standard for Electric Lawn Mowers

UL 2753-2018 Outline of Investigation for Battery Operated Ride-On Lawn Mowers [end underline]

[begin strikeout] ~~(3) Power lawn mowers manufactured after September 2, 2010, shall be affixed with a durable label stating that the power lawn mower is manufactured in accordance with the applicable ANSI B71.1 or B71.4 standard.'~~ [end strikeout]

- Petitioner (OPEI) requests that this clause be deleted for three reasons 1) none of the current edition cited standards include this as a requirement, 2) this requirement provides no safety benefit, 3) this requirement is an undue burden as it is unique to California and disparate with all other U.S. states.

(c) Roll-Over Protective Structures (ROPS) and Seat Belts. Effective March 1, 2011, when visual inspection or technical information from the manufacturer indicates that a riding lawn mower is designed by the manufacturer to be equipped with ROPS, or to accept ROPS as an option, ROPS engineered and approved for the mower shall be provided and used. Approved seat belt assemblies shall be provided and used on all riding lawn mowers where ROPS are installed.

Exception: The use of ROPS and seat belts may be temporarily suspended only when operating in areas where the vertical clearance is insufficient to allow a ROPS equipped mower to operate.

NOTE: The requirements for ROPS on agricultural and industrial tractors are provided in Article 25 of the General Industry Safety Orders.

(d) Prohibited use of Ride-on, Sit-down Lawn Mowers.

(1) Ride-on, sit-down lawn mowers shall not be used on slopes that exceed the angle limitation when specified by the manufacturer.

(2) When the manufacturer's instructions are not obtainable or do not specify the angle limits for operating ride-on, sit-down lawn mowers on sloped surfaces, a qualified person shall evaluate the terrain and slope conditions to ensure the mower is operated in a safe manner.

(3) Ride-on, sit-down lawn mowers shall not be operated in areas where the traction drive wheels, as measured from the outside wheel edge, are within 5 feet of the unprotected edges of retaining walls, embankments, levees, ditches, culverts, excavations or similar locations that present an overturn hazard.

(4) When it is necessary to operate a ride-on, sit-down mower near ponds, creeks, reservoirs, canals, sloughs, lakes, golf course water hazards and similar bodies of water, a qualified person shall evaluate the terrain and any slope conditions to ensure the mower is operated at safe speeds and at safe distances from such hazards.

(e) Powered Lawn Mower Operator Training.

(1) Safe operation.

The employer shall ensure that each power lawn mower operator is competent to operate the mower safely, as demonstrated by the successful completion of the training and evaluation specified in this subsection. Prior to permitting an employee to operate a power lawn mower (except for training purposes), the employer shall ensure that each operator

has successfully completed the training required by this subsection, except as permitted in subsection (e)(5).

(2) Training program implementation.

(A) All operator training and evaluation shall be conducted by qualified persons who have the knowledge, training and experience to train power lawn mower operators and evaluate their competence.

(B) Trainees may operate a power lawn mower only under the direct supervision of qualified persons provided that such operation does not endanger the trainee or other employees.

(C) Training shall consist of a combination of formal instruction (e.g., lecture, discussion, written material, audio visual material) and also include demonstrations by the trainer and practical exercises performed by the trainee and evaluation of the operator's performance.

(3) Training program content. Operators shall receive initial training to ensure that each employee who operates a power lawn mower has been provided training in the hazards associated with the operation of mowers and other topics necessary for the safe operation of mowers. Training shall include at least the following:

(A) Review of the manufacturer's operator's manual including operating instructions, warnings and precautions for the types of power lawn mowers the operator will be authorized to operate.

(B) Review of the operator controls and instrumentation for safe operation of the equipment.

(C) Review all safety devices to ensure guards and shields are kept securely in place.

(D) The importance of surveying the terrain for hazards prior to mowing to identify obstacles in the mowing path, such as large rocks, tree stumps, soft or wet spots, and the prohibited use areas for ride-on, sit-down mowers provided in subsection (d) of this section.

(E) Speed control, steering and maneuvering the mower.

(F) Review of stability and rollover hazards associated with operating riding lawn mowers on surfaces, terrains or areas such as, but not limited to loading ramps, wet surfaces, slopes, and areas near drop offs, retaining walls/embankments, water or ponds, unprotected ditches, culverts, or excavations.

(G) The use of ROPS and seatbelts for riding mowers that are equipped with ROPS.

(4) Refresher training and evaluation. Refresher training, including an evaluation of the effectiveness of that training, shall be conducted as required by this subsection to ensure

that the operator has the knowledge and skills needed to operate the power lawn mower safely.

Refresher training in relevant topics shall be provided to the operator when:

(A) The operator has been observed to operate a mower in an unsafe manner;

(B) The operator has been involved in an accident or near-miss incident;

(C) The operator has received an evaluation that reveals that the operator is not operating a mower safely; or

(D) The operator receives a new job assignment that includes operating a mower or machinery that the operator is unfamiliar with or includes mowing lawns on terrain or surfaces that present hazards unfamiliar to the operator in their current or past work assignments.

(5) Avoidance of duplicative training. If an operator has previously received training in a topic specified in subsection (e)(3) of this section, and such training is appropriate for the type of power lawn mower authorized for use and the working conditions encountered, additional training in that topic is not required if the operator has been evaluated and found competent to operate the mower safely.

(6) Recordkeeping. All safety instruction and training shall be documented in accordance with Section 3203 of the General Industry Safety Orders.

Note: Authority cited: Section 142.3, Labor Code. Reference: Section 142.3, Labor Code.

HISTORY

1. Amendment filed 12-19-78; effective thirtieth day thereafter (Register 79, No. 1).

2. Amendment filed 11-22-85; effective thirtieth day thereafter (Register 85, No. 48).

3. Amendment of subsections (b)(1) and (b)(2) filed 3-16-99; operative 4-15-99 (Register 99, No. 12).

4. Amendment filed 8-3-2010; operative 9-2-2010 (Register 2010, No. 32).

[begin underline] 5. Amendment filed .... [end underline]

 Go Back to Article 20 Table of Contents

Occupational Safety and Health Standards Board

Business Meeting Proposed Variance Decisions

Prepared by the Department of Industrial Relations
Available on the DIR web page: Standards Board (OSHSB) 2026 Meeting Schedule

CONSENT CALENDAR—PROPOSED VARIANCE DECISIONS
OCTOBER 15, 2026, MONTHLY BUSINESS MEETING
OF THE OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD

PROPOSED DECISIONS FOR BOARD CONSIDERATION, HEARD ON SEPTEMBER 23, 2026

Docket Number	Applicant Name	Safety Order(s) at Issue	Proposed Decision Recommendation
1. 19-V-403M2	Pacific Urban Investors	ELEVATOR	GRANT
2. 24-V-216M1	Broadway Properties La Jolla LLC	ELEVATOR	GRANT
3. 24-V-460M1	Gable House Development, LLC	ELEVATOR	GRANT
4. 24-V-556M1	AvalonBay Communities, Inc.	ELEVATOR	GRANT
5. 25-V-115M1	BIG WAVE GROUP INC	ELEVATOR	GRANT
6. 25-V-362M1	UCSF Benioff Children's Hospital Oakland	ELEVATOR	GRANT
7. 25-V-388M1	Mirka Investment, LLC	ELEVATOR	GRANT
8. 25-V-395M1	Google, LLC	ELEVATOR	GRANT
9. 26-V-183M1	292 Barham, LLC	ELEVATOR	GRANT
10. 26-V-321M1	Board of Trustees of the California State University	ELEVATOR	GRANT
11. 26-V-412	Pacific West Communities	ELEVATOR	GRANT
12. 26-V-417	Farmersville Gardenia Senior Associates, LP	ELEVATOR	GRANT
13. 26-V-418	Fontana Unified School District	ELEVATOR	GRANT
14. 26-V-419	447 Burchett Street LLC	ELEVATOR	GRANT
15. 26-V-420	Kingsley Project LLC	ELEVATOR	GRANT
16. 26-V-421	1723 Corinth LP	ELEVATOR	GRANT

Docket Number	Applicant Name	Safety Order(s) at Issue	Proposed Decision Recommendation
17. 26-V-422	2800 Telegraph Partners LLC	ELEVATOR	GRANT
18. 26-V-423	Sutter Bay Hospitals	ELEVATOR	GRANT
19. 26-V-424	Park Place San Mateo Owner, LP	ELEVATOR	GRANT
20. 26-V-425	Tampa Sherman, LP	ELEVATOR	GRANT
21. 26-V-426	Raul F. Hernandez	ELEVATOR	GRANT
22. 26-V-427	Milibrae MF Owner LLC	ELEVATOR	GRANT
23. 26-V-428	Thornton Affordable Housing, L.P.	ELEVATOR	GRANT
24. 26-V-429	Penn Valley Pacific Associates II, A California Limited Partnership	ELEVATOR	GRANT
25. 26-V-430	Trillium Senior Apartments LP	ELEVATOR	GRANT
26. 26-V-431	State & Laurel, LLC	ELEVATOR	GRANT
27. 26-V-432	Burbank-Glendale-Pasadena Airport Authority	ELEVATOR	GRANT
28. 26-V-433	Project Oak Hill, LLC	ELEVATOR	GRANT
29. 26-V-434	San Jose Trimble Associates, A California Limited Partnership	ELEVATOR	GRANT
30. 26-V-435	San Rafael Multifamily LLC	ELEVATOR	GRANT
31. 26-V-436	Soquel Pacific Associates, A Limited Partnership	ELEVATOR	GRANT
32. 26-V-437	Virginia College Associates LP	ELEVATOR	GRANT
33. 26-V-438	San Diego Unified School District	ELEVATOR	GRANT
34. 26-V-439	Savannah Four, LLC	ELEVATOR	GRANT

Docket Number	Applicant Name	Safety Order(s) at Issue	Proposed Decision Recommendation
35. 26-V-441	304 E. Spruce St LP	ELEVATOR	GRANT
36. 26-V-443	Napa Vallejo Waste Management Authority	ELEVATOR	GRANT
37. 26-V-444	Los Angeles World Airports (LAWA)	ELEVATOR	GRANT
38. 26-V-445	Essex Portfolio L.P.	ELEVATOR	GRANT
39. 26-V-446	Center for the Art of Translation	ELEVATOR	GRANT
40. 26-V-447	1101 Sutter Affordable, LP	ELEVATOR	GRANT
41. 26-V-448	Pac Avenue, L.P.	ELEVATOR	GRANT
42. 26-V-449	MP Lazuli Landing Associates, L.P.	ELEVATOR	GRANT
43. 26-V-450	Second Harvest of Silicon Valley	ELEVATOR	GRANT
44. 26-V-451	Mercy Housing California 114, L.P.	ELEVATOR	GRANT
45. 26-V-452	Mercy Housing California 114, L.P.	ELEVATOR	GRANT
46. 26-V-453	Santa Cruz City Schools	ELEVATOR	GRANT
47. 26-V-454	BSL Centinela, LLC	ELEVATOR	GRANT
48. 26-V-455	The Harker School	ELEVATOR	GRANT
49. 26-V-456	Grays Crossing Hospitality LLC	ELEVATOR	GRANT
50. 26-V-457	Berryessa Affordable Housing, L.P.	ELEVATOR	GRANT
51. 26-V-458	Visionary Home Builders of California, Inc.	ELEVATOR	GRANT

Docket Number	Applicant Name	Safety Order(s) at Issue	Proposed Decision Recommendation
52. 26-V-459	SPG-AMLI Brea Residential, LLC	ELEVATOR	GRANT
53. 26-V-460	Salk Avenue Holdings LLC	ELEVATOR	GRANT
54. 26-V-461	CCFB Real Estate, Inc.	ELEVATOR	GRANT
55. 26-V-462	2K's REALTY LLC	ELEVATOR	GRANT
56. 26-V-463	Paradise Marin LLC	ELEVATOR	GRANT
57. 26-V-464	California Rural Legal Assistance Inc.	ELEVATOR	GRANT
58. 26-V-465	J.S. West Milling Company	ELEVATOR	GRANT
59. 26-V-466	Page I Estate LLC	ELEVATOR	GRANT
60. 26-V-467	Page II Estate LLC	ELEVATOR	GRANT
61. 26-V-468	Rocklin Sierra 703, L.P.	ELEVATOR	GRANT
62. 26-V-469	City of Los Angeles, Dept. of Public Works	ELEVATOR	GRANT
63. 26-V-470	929 18th Street, LLC	ELEVATOR	GRANT
64. 26-V-471	Mercy Housing California 91, L.P.	ELEVATOR	GRANT
65. 26-V-472	Balboa Lee Ave LP	ELEVATOR	GRANT
66. 26-V-473	Odd Fellows Home of California	ELEVATOR	GRANT
67. 26-V-474	Odd Fellows Home of California	ELEVATOR	GRANT
68. 26-V-475	Odd Fellows Home of California	ELEVATOR	GRANT
69. 26-V-476	733 Treat LLC	ELEVATOR	GRANT
70. 26-V-477	Palomar Residences, LLC	ELEVATOR	GRANT
71. 26-V-478	Odd Fellows Home of California	ELEVATOR	GRANT

Docket Number	Applicant Name	Safety Order(s) at Issue	Proposed Decision Recommendation
72. 26-V-479	Calvary Chapel of Chino Hills	ELEVATOR	GRANT
73. 26-V-480	Compton Community College District	ELEVATOR	GRANT
74. 26-V-481	Coral Blossom Apartments LP, A California Limited Partnership	ELEVATOR	GRANT
75. 26-V-482	Inglewood Park Cemetery	ELEVATOR	GRANT
76. 26-V-484	Bachem Americas Inc	ELEVATOR	GRANT
77. 26-V-485	Tustin Legacy Acquisition, LLC	ELEVATOR	GRANT
78. 26-V-486	CA Circle Family Apartments, LP	ELEVATOR	GRANT
79. 26-V-487	ESC Senior, L.P.	ELEVATOR	GRANT
80. 26-V-488	GS Agoura Hills Venture Owner, LLC	ELEVATOR	GRANT

PROPOSED DECISIONS FOR BOARD CONSIDERATION, HEARD ON SEPTEMBER 18, 2025

Docket Number	Applicant Name	Safety Order(s) at Issue	Proposed Decision Recommendation
81. 23-V-580	Dragados	Sections 1604.24(a)(2), 1604.26(c) and 8495(b)(i)	DENY

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application to Modify Permanent Variance by:

Pacific Urban Investors

Permanent Variance No: 19-V-403M2

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The following person or entity ("Applicant") has applied for a modification of permanent variance from a provision of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Preexisting Permanent Variance No.	Preexisting Variance Holder of Record
19-V-403M1	Anton Milpitas 730, LLC

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026, via videoconference, by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit in accordance with section 426.

2. At the hearing, Ernie Fatigoni appeared as the Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application for Modification of Permanent Variance
PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the safety regulation requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. The Applicant requests modification of the variance holder specified within Board records for each conveyance the subject of previously granted Permanent Variance Nos. 19-V-403, and 19-V-403M1 therewith.
2. The modification application submitted by applicant, declared to be wholly truthful under penalty of perjury by the signatory, states that Pacific Urban Investors became the owner of the conveyance(s) subject to the existing variance.
3. Cal/OSHA has evaluated the request for modification of person or entity of record holding Permanent Variance No. 19-V-403M2, finds no issue with it, and recommends that the application for modification be granted subject to the same conditions of the Decision and Order in Permanent Variance Nos. 19-V-403, and 19-V-403M1 therewith.
4. The Board finds the declaratory statements of the Applicant signatory to be credible, uncontroverted, and consistent with available, sufficient facts, and of no bearing as to the finding of equivalent occupational health and safety upon which, in substantial part, grant of preexisting Permanent Variance Nos. 19-V-403, and 19-V-403M1 therewith was based.
5. The Board finds the current person or entity having custody of each conveyance the subject of Permanent Variance No. 19-V-403M2, to be:

Pacific Urban Investors

D. Decision and Order

1. Variance application 19-V-403M2 is conditionally GRANTED, as specified below, such that, within Board records, the person or entity holding Permanent Variance Nos. 19-V-403, and 19-V-403M1 therewith, shall be:

Pacific Urban Investors

2. Permanent Variance Nos. 19-V-403, and 19-V-403M1 therewith, only being modified as specified in above Decision and Order section 1, is otherwise unchanged and remaining in full force and effect, as hereby incorporated by reference into this Decision and Order of Permanent Variance No. 19-V-403M2.
3. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.
4. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of

adoption.

DATED: September 24, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance By: Dragados	Permanent Variance No.: 23-V-580 **PROPOSED DECISION** Final Hearing Date: September 18, 2025

A. Procedural Matters

1. Dragados ("Applicant") has applied for a permanent variance from certain provisions of California Code of Regulations, title 8[1], specifically sections 1604.24(a)(2) and 1604.26(c) of the Construction Safety Orders, and 8495(b)(1) of the Tunnel Safety Orders, regarding the operation of construction personnel elevators at a construction worksite.

2. This proceeding is conducted in accordance with Labor Code section 143, and section 401, et. seq. of the Board's procedural regulations.

3. A first day of hearing was held on December 17, 2024 via Zoom by delegation of the Occupational Safety and Health Standards Board (Board). The hearing panelists were Board Members Joseph M. Alioto Jr. and Dave Harrison, and the hearing officer was Michelle Iorio.

4. A second day of hearing was held on September 18, 2025 in Truckee, California, and the hearing panelists were Board members Joseph M. Alioto Jr., Dave Harrison, Derek Urwin, and Chris Laszcz-Davis. The hearing officer was Michelle Iorio.

5. Appearing for the Applicant was Ryan Swift, Safety Manager for Dragados, and Matthew Kendall, Project Manager for Dragados, represented by attorney Kevin Bland. Also testifying for Applicant was Dan Leacox. Michael Nelmida, Senior Safety Engineer, appeared on behalf of the Board. Spencer Price, Senior Safety Engineer; Jason Denning, Principal Safety Engineer; James Wittry, Principal Safety Engineer; and David Morris, Senior Safety Engineer of the Elevator Unit, all appeared for the Division of Occupational Safety and Health (Cal/OSHA).

6. Oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence: Application for Permanent Variance as Exhibit PD-1 (incorporating Exhibits A-AA submitted by Applicant), Notice of Hearing as PD-2,

[1] Unless otherwise stated, all references are to the California Code of Regulations, title 8.

Cal/OSHA's Review of Application as PD-3, and Board Staff Review of Application as PD-4, and official notice taken of the Board's rulemaking records, and variance decisions concerning the safety order requirements from which variance is requested.

7. After the two days of hearing, the panel ordered further briefing to be admitted into evidence as follows: (1) a report from the Cal/OSHA Elevator Unit dated March 25, 2025; (2) an affidavit from Dan Barker of the Cal/OSHA Elevator Unit dated January 8, 2026; and (3) a second report from the Cal/OSHA Elevator Unit dated January 8, 2026. These items were admitted into the record as Exhibits PD-5, 6 and 7, respectively.

8. On May 5, 2026, the Applicant submitted additional evidence as follows: (1) a declaration from Ryan Swift dated April 27, 2026; (2) a declaration from Matt Finnerty, consultant and owner of Finnco Services Inc. [date unclear] regarding CPH Conversion; and (3) an additional declaration from Matt Finnerty [date unclear] responding to the Cal/OSHA Elevator Unit's second report. The hearing record was subsequently closed by the hearing officer.

9. This proposed decision, prepared as directed by the hearing panel, is presented to the Board for its consideration, in accordance with section 426 of the Board's rules of procedure. All Board members have reviewed the entirety of the hearing record prior to issuing this decision.

B. Findings of Fact

Based upon the record of this proceeding, the Board finds the following:

1. The Applicant is a general contractor engaged in the engineering and construction of large civil infrastructure projects throughout North America, including underground construction.

2. For the project subject to this variance application, the Los Angeles County Sanitation District contracted the Applicant to construct a 7-mile-long tunnel for the Joint Water Pollution Control Plant (JWPCP) – Effluent Outfall Tunnel Project. The project includes associated vertical access shafts, and the starter and tail tunnels within the entry shaft at the start of the tunnel. The starter and tail tunnels serve the purpose of enabling the fitting together of the tunnel-boring machine (TBM) assemblage within the relatively narrow diameter of the entry shaft. The main work site is located at 1701 South Figueroa Street in Wilmington, California.

3. The Applicant proposes to utilize a construction passenger elevator, also called a construction personnel hoist (CPH) in the entry shaft (also sometimes referred to as a drop shaft) to transport employees between the surface level and the bottom of the shaft.

4. The shaft will be excavated using a clamshell bucket attached to a crane to its final depth of 122.2 feet, lined with concrete, and dewatered. The shaft excavation diameter will be 55 feet, with a final lined shaft diameter of 48 feet. The starter and tail tunnels will be 23-foot diameter elliptical tunnels. Due to spatial constraints, the CPH will not be installed until the starter and tail tunnels are complete. A cage ladder system will also be installed at that time. Access and egress will be available via the elevator and cage ladder. In addition, a man basket that can be attached to the service crane will be available.

5. The shaft will access the tunnels during construction, which were originally classified as "gassy" by Cal/OSHA's Mining and Tunneling Unit and later downgraded to "potentially gassy." A potentially gassy classification is applicable to tunnels where there is a possibility that flammable gas or hydrocarbons will be encountered (section 8422(b)(2)).

6. The CPH will transport employees including laborers and technical staff personnel, and small hand tools, between the bottom of the shaft and the existing ground level above at the beginning and ending of the work shift. Approximately 20 employees may use the CPH during each shift. During the intermittent period of the shift change, approximately 30 employees could be present and utilizing the CPH. A mobile crane at ground level will hoist large equipment and materials.

7. The CPH used by the Applicant is an Alimak Scando 650 25/32 for transporting employees and small tools only. The CPH has a capacity of 5,500 pounds and operates with a rack and pinion drive.

8. Section 1604.24(a)(2) provides:

    (2) Operating Devices for Car-Switch Operation Hoists.

    Handles of lever-type operating devices of car-switch operation hoists shall be so arranged that they will return to the stop position when the hand of the operator is removed. Car-switch push-buttons shall be of the constant-pressure type so that when the hand is removed from the button the car will stop.

    Section 1604.26(c) provides:

    (c) Operation. Hoists shall be operated only by a competent authorized operator, in the car, or stationed adjacent to the driving machine subject to the following conditions:

    (*1) A regular attendant is stationed in the car.*

(2) A constant-pressure-type switch shall be provided in the car, which must be held manually in the closed position by the attendant in the car in order to permit operation of the driving machine and which shall be opened automatically when released by the operator during normal or emergency stop operations.
(3) A means of closed voice communication shall be provided between the car attendant and the operator stationed adjacent to the driving machine.

Section 8495(b)(l) provides:

(b) Personnel Hoisting Systems.
(1) The hoist control shall be of such design that it will return to the "stop" position when the hand of the operator is removed from the control lever. The brakes shall be automatically applied and the power cut off whenever the control lever is in the "stop" position.

9. Sections 1604(a)(2) and 8495(b)(1) both require operators of CPHs to apply constant pressure or contact to the controls for the hoist car to move. If the operator removes pressure or contact, the hoist car stops immediately.

10. The Applicant requests a variance from these sections to allow use of a CPH with automatic controls. The applicant proposes to use automatic controls located within the hoist car instead of constant pressure control levers or constant contact buttons. Single-press buttons or controls located within the hoist car and at the upper and lower landings will summon and direct the movement of the hoist car.

11. Section 1604.26(c) requires CPHs to be operated by an authorized operator in the hoist car. It also allows the authorized operator to be stationed at the CPH driving machine if a regular attendant is in the hoist car in communication with the operator and the hoist car is equipped with constant pressure controls (similar to section 1604.24(a)(2) and 8495(b)(1)).

12. The Applicant requests a variance from section 1604.26(c) to avoid having authorized, dedicated operators, or attendants stationed inside the hoist car at all times. Instead, Applicant proposes to designate all of their employees as competent operators such that all shifts will have multiple personnel authorized to operate the CPH. The Applicant will train all employees in the CPH's operation and emergency procedures.

13. Cal/OSHA and Board Staff evaluations both recommend a grant of the variance application with identical conditions.

14. At the December 17, 2024 hearing, Applicant submitted exhibits that included images of the interior of the CPH then in use. Upon the Panel's examination of those images and questioning of Applicant, it conceded that an automatic switch had already been installed in the CPH. Applicant testified the automatic switch had been installed at least as early as October 2022, more than a year before Applicant's November 30, 2023 petition requesting a variance to install the switch. At the December 17, 2024 hearing and again at the September 18, 2025 hearing, Applicant asserted that the CPH with automatic controls had been inspected and permitted by the Cal/OSHA Elevator Unit. At the September 18, 2025 hearing, Elevator Unit representative Dave Morris testified that the Elevator Unit would not have issued a permit for a CPH with automatic controls, and that, in any event, an automatic switch required a variance approved by the Board, not just a permit from the Elevator Unit. In its affidavit dated January 8, 2026, the Elevator Unit's Dan Barker stated there was no evidence to confirm or refute Applicant's contention that its CPH previously had been permitted. Regardless, it is uncontested that Applicant had an automatic switch installed in its CPH before requesting or being granted a variance to install the switch.

15. On May 5, 2026, the Applicant submitted additional declarations asserting that (1) the Applicant could meet the 29 conditions recommended by the Cal/OSHA Elevator Unit in its second report and (2) the Applicant's CPH has been or will be converted from automatic controls to constant pressure controls.

16. Board decisions have been split on applications requesting the same variances from CPH regulations as the Applicant here, granting some and denying others. Denials include Permanent Variance No. 18-V-456 (Shea/Parsons Joint Venture), adopted November 19, 2020; Permanent Variance No. 20-V-210 (Dragados), adopted May 19, 2022; and Permanent Variance No. 20-V-096 (Tutor Perini/O&G JV), adopted July 18, 2024. Grants include Permanent Variance No. 15-V-287 (Skanska USA Civil West California District, Inc. and Traylor Brothers JV), adopted June 16, 2016; Permanent Variance No. 04-V-057 (Traylor Frontier-Kemper Contractors Inc., JV), adopted July 21, 2005; and Permanent Variance No. 03-V-007 (Traylor Shea Frontier Kenny JV), adopted January 15, 2004.

17. The Board denied the Shea/Parsons Joint Venture variance application on the grounds that "[w]ithout an operator, should the car door be stuck at the top of the shaft, while employees are attempting to evacuate from the bottom of the shaft, it is unclear who would have responsibility for identifying the door issue, and fixing it. An attendant stationed in the car would be able to quickly identify and address the problem. The panel is concerned that the lack of an attendant could cause a hazardous or fatal delay in event of emergency."

18. The Board similarly denied the previous Dragados variance application on the grounds that "[i]n a potentially gassy tunnel such as the one at issue here, time is of the essence

in an emergency situation, where employees may need to quickly evacuate due to atmospheric or other hazards. As in 18-V-456, the panel is concerned that the lack of attendant could cause a hazardous or even fatal delay in the event of an emergency. A worker stationed up to 100 feet away from the conveyance simply does not provide equivalent to an attendant being stationed at the conveyance at all times."

19. Most recently, the Board also denied the Tutor Perini/O&G JV variance application on the grounds that "[i]n a potentially gassy tunnel such as the one at issue here, time is of the essence in an emergency situation, where employees may need to quickly evacuate due to atmospheric or other hazards. As in 18-V-456 and 20-V-210, the panel is concerned that the lack of attendant could cause a hazardous or even fatal delay in the event of an emergency. Further, the panel is concerned that there is no way to prevent untrained workers from operating and being transported via CPH in instances outside of an emergency, thus putting workers' lives at risk."

20. The Board granted the Skanska, Traylor Frontier-Kemper Contractors Inc., JV, and Traylor Shea Frontier Kenny JV variance applications subject to nearly identical conditions, including "Except during an emergency, the use of the [CPH] shall be limited to [employees] who are trained by the applicant to operate the hoist."

C. Conclusive Findings

The panel finds that the variances requested by Applicant would not provide equivalent or greater safety than the current regulations as required by Labor Code section 143, which states:

(a) Any employer may apply to the board for a permanent variance from an occupational safety and health standard, order, special order, or portion thereof, upon a showing of an alternate program, method, practice, means, device, or process which will provide equal or superior safety for employees.

(b) The board shall issue such variance if it determines on the record, after opportunity for an investigation where appropriate and a hearing, that the proponent of the variance has demonstrated by a preponderance of the evidence that the conditions, practices, means, methods, operations, or processes used or proposed to be used by an employer will provide employment and places of employment to their employees which are as safe and healthful as those which would prevail if they complied with the standard. The variance so issued shall prescribe the conditions the employer must maintain and the practices, means, methods, operations, and processes which he must adopt and utilize to the extent they differ from the standard in question.

(c) The board is authorized to grant a variance from any standard or portion thereof whenever it determines such variance is necessary to permit an employer to

participate in an experiment approved by the director designed to demonstrate or validate new and improved techniques to safeguard the health or safety of workers.

(d) A permanent variance may be modified or revoked upon application by an employer, employees, or the division, or by the board on its own motion, in the manner prescribed for its issuance under this section at any time.

Specifically, and in line with the reasoning of the Board in the aforementioned CPH variance application denials, the panel finds that a CPH without a stationed operator and with automatic controls will put workers' lives at risk. The current regulation as drafted requires a stationed operator for good reason. The operator's familiarity with the specific CPH in use, combined with their constant presence in the CPH, ensures the CPH's proper operation. This familiarity and everpresence could be the difference between life or death in the instance of a bad break adjustment, malfunctioning CPH equipment, or an emergency such as a fire, gas leak, or injury, when time is critical.

The panel is particularly concerned about the proposed variance's impact in emergency situations. In the case of a seismic event or other emergency such as fire, manual CPH controls are necessary to prevent the doors from opening or prevent the car from traveling further when it would be dangerous. For example, in the event of damage to or malfunction of the automatic controls, such as may occur with smoke, heat or water, or general degradation of the circuit board, the car might travel into an area involved in fire and risk injuring or killing the occupants. A full-time operator with manual controls could detect and avoid such risk. Automatic controls would also prevent override of the CPH when it is necessary to stop the car and/or open the doors when and where it would be safest for the CPH occupants to exit the car.

Therefore, the panel concludes that Applicant's variance request generally, and specifically Applicant's proposal to allow any person on the job site to operate a CPH with automatic controls in an emergency, regardless of that person's training, would actually *increase* the risk of additional injury or death. For that reason, the panel is no longer convinced by the reasoning of the Board in the aforementioned grants of CPH variance applications.

After the close of hearing, the panel requested the Cal/OSHA Elevator Unit to opine on the conditions it believed necessary to ensure an unstaffed CPH with automatic controls would provide "equal or superior safety" as a staffed CPH using a constant control ("deadman") switch. The resulting report describes and relies on criteria necessary for the safety of elevators, not CPHs, rendering the report largely unhelpful to the panel's determination. It thus carries little weight for the Board that the Applicant declared it can meet these conditions.

Finally, to justify a variance, the Applicant must show that its "alternate … method" will in fact "provide equal or superior safety for employees." The Applicant in this case violated section 1604.24(a)(2) by installing an automatic switch before it applied for a variance to install the

switch. Applicant contends Cal/OSHA permitted the elevator. The Elevator Unit was unable to confirm or deny that fact. However, by applying for a variance to install the automatic switch, Applicant appears to concede the switch was not yet authorized. The Applicant declared on May 5, 2026 that its CPH has been or will be converted from automatic controls to constant pressure controls. But, where an applicant has demonstrated an inability to abide by -- or a willingness to violate -- Title 8 regulations, the panel has little faith that the conditions of a variance would be applied, if one were granted. Without reasonable assurance that an "alternative method" will be implemented according to the conditions of a variance, the panel cannot conclude the alternative method would "provide equal or superior safety to employees."

Based upon the above findings and the record as a whole, the panel concludes that Applicant has not met the required showing that its proposed alternative program, method, practice, means, device, or process would provide equal or superior conveyance safety, and workplace safety and health, as would prevail if Applicant complied with the requirements of the safety order from which permanent variance has been requested.

The panel believes that an advisory committee would be the most appropriate avenue for discussing changes to the regulations that would address the Applicant's permanent variance request.

D. Decision and Order

A preponderance of the evidence supports the conclusion that that the Applicant's proposal will not provide equivalent safety and health to that which would prevail upon full compliance with the requirements of sections 1604.24 subdivision (a)(2) and 1604.26, subdivision (c), and 8495, subdivision (b)(1), from which variance is being sought.

The application for Permanent Variance No. 23-V-580 requested by Dragados is hereby DENIED.

The Board appreciates that the current CPH regulations may not take into account current technologies and innovations, and that updates to the regulations may be due. The panel recommends the Board hold an advisory committee to discuss possible changes to the title 8 regulations at issue.

Pursuant to section 426, subdivision (b), the above, duly completed Proposed Decision, is hereby submitted to the Occupational Safety and Health Standards Board for consideration of adoption.

Dated: October 1, 2026

Michelle Iorio

Michelle Iorio, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application to Modify Permanent Variance by:

Broadway Properties La Jolla LLC

Permanent Variance No: 24-V-216M1

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The following person or entity ("Applicant") has applied for a modification of permanent variance from a provision of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Preexisting Permanent Variance No.	Applicant Name	Preexisting Variance Address of Record
24-V-216	Broadway Properties La Jolla LLC	1150 Silverado Drive La Jolla, CA

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026, via videoconference, by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit in accordance with section 426.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application for Modification of Permanent Variance
PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the safety regulation requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. The Applicant requests modification of the address of the unchanging variance location specified within Board records for each conveyance the subject of previously granted Permanent Variance No. 24-V-216 therewith.
2. The Application declared to be wholly truthful under penalty of perjury by Application signatory, states facts upon which reasonably may be based a finding that the address, specified in the records of the Board, at which Permanent Variance No. 24-V-216M1 is in effect, in fact is more completely, and correctly the different combination of addresses specified in below subsection D.1.
3. Cal/OSHA has evaluated the request for modification of variance location address, finds no issue with it, and recommends that the application for modification be granted subject to the same conditions of the Decision and Order in Permanent Variance No. 24-V-216 therewith.
4. The Board finds the above subpart C.2 referenced declaration to be credible, uncontroverted, and consistent with available, sufficient facts, and of no bearing as to the finding of equivalent occupational health and safety upon which Grant of preexisting Permanent Variance No. 24-V-216 therewith was based.
5. The Board finds the correct address by which to designate the location of each conveyance the subject of Permanent Variance No. 24-V-216, to be:

1150 Silverado St.
La Jolla, CA

D. Decision and Order

1. Permanent Variance Application No. 24-V-216M1 is conditionally GRANTED, thereby modifying Board records, such that, without change in variance location, each conveyance being the subject of Permanent Variance No. 24-V-216 therewith, shall have the following address designation:

1150 Silverado St.
La Jolla, CA

2. Permanent Variance No. 24-V-216 therewith, being only modified as to the subject location address specified in above Decision and Order section 1, is otherwise unchanged and remaining in full force and effect, as hereby incorporated by reference into this Decision and Order of Permanent Variance No. 24-V-216M1.
3. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

4. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 28, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application to Modify Permanent Variance by:

Gable House Development, LLC

Permanent Variance No: 24-V-460M1

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The following person or entity ("Applicant") has applied for a modification of permanent variance from a provision of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Preexisting Permanent Variance No.	Applicant Name	Preexisting Variance Address of Record
24-V-460	Gable House Development, LLC	22501 Hawthorne Blvd. Torrance, CA

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026, via videoconference, by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit in accordance with section 426.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application for Modification of Permanent Variance
PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the safety regulation requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. The Applicant requests modification of the address of the unchanging variance location specified within Board records for each conveyance the subject of previously granted Permanent Variance No. 24-V-460 therewith.
2. The Application declared to be wholly truthful under penalty of perjury by Application signatory, states facts upon which reasonably may be based a finding that the address, specified in the records of the Board, at which Permanent Variance No. 24-V-460M1 is in effect, in fact is more completely, and correctly the different combination of addresses specified in below subsection D.1.
3. Cal/OSHA has evaluated the request for modification of variance location address, finds no issue with it, and recommends that the application for modification be granted subject to the same conditions of the Decision and Order in Permanent Variance No. 24-V-460 therewith.
4. The Board finds the above subpart C.2 referenced declaration to be credible, uncontroverted, and consistent with available, sufficient facts, and of no bearing as to the finding of equivalent occupational health and safety upon which Grant of preexisting Permanent Variance No. 24-V-460 therewith was based.
5. The Board finds the correct address by which to designate the location of each conveyance the subject of Permanent Variance No. 24-V-460, to be:

22575 Hawthrone Blvd.
Torrance, CA

D. Decision and Order

1. Permanent Variance Application No. 24-V-460M1 is conditionally GRANTED, thereby modifying Board records, such that, without change in variance location, each conveyance being the subject of Permanent Variance No. 24-V-460 therewith, shall have the following address designation:

22575 Hawthrone Blvd.
Torrance, CA

2. Permanent Variance No. 24-V-460 therewith, being only modified as to the subject location address specified in above Decision and Order section 1, is otherwise unchanged and remaining in full force and effect, as hereby incorporated by reference into this Decision and Order of Permanent Variance No. 24-V-460M1.
3. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

4. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 28, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application to Modify Permanent Variance by:

AvalonBay Communities, Inc.

Permanent Variance No: 24-V-556M1

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The following person or entity ("Applicant") has applied for a modification of permanent variance from a provision of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Preexisting Permanent Variance No.	Applicant Name	Preexisting Variance Address of Record
24-V-556	AvalonBay Communities, Inc.	Kanso Hillcrest 3900 Cleveland Ave. San Diego, CA

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026, via videoconference, by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit in accordance with section 426.

2. At the hearing, Dan Leacox, with Leacox & Associates, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application for Modification of Permanent Variance
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the safety regulation requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. The Applicant requests modification of the address of the unchanging variance location specified within Board records for each conveyance the subject of previously granted Permanent Variance No. 24-V-556 therewith.
2. The Application declared to be wholly truthful under penalty of perjury by Application signatory, states facts upon which reasonably may be based a finding that the address, specified in the records of the Board, at which Permanent Variance No. 24-V-556M1 is in effect, in fact is more completely, and correctly the different combination of addresses specified in below subsection D.1.
3. Cal/OSHA has evaluated the request for modification of variance location address, finds no issue with it, and recommends that the application for modification be granted subject to the same conditions of the Decision and Order in Permanent Variance No. 24-V-556 therewith.
4. The Board finds the above subpart C.2 referenced declaration to be credible, uncontroverted, and consistent with available, sufficient facts, and of no bearing as to the finding of equivalent occupational health and safety upon which Grant of preexisting Permanent Variance No. 24-V-556 therewith was based.
5. The Board finds the correct address by which to designate the location of each conveyance the subject of Permanent Variance No. 24-V-556, to be:

Kanso Hillcrest
3930 Cleveland Ave.
San Diego, CA

D. Decision and Order

1. Permanent Variance Application No. 24-V-556M1 is conditionally GRANTED, thereby modifying Board records, such that, without change in variance location, each conveyance being the subject of Permanent Variance No. 24-V-556 therewith, shall have the following address designation:

Kanso Hillcrest
3930 Cleveland Ave.
San Diego, CA

2. Permanent Variance No. 24-V-556 therewith, being only modified as to the subject location address specified in above Decision and Order section 1, is otherwise unchanged and remaining in full force and effect, as hereby incorporated by reference into this Decision and Order of Permanent Variance No. 24-V-556M1.

3. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.
4. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application to Modify Permanent Variance by:

BIG WAVE GROUP INC

Permanent Variance No: 25-V-115M1

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The following person or entity ("Applicant") has applied for a modification of permanent variance from a provision of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Preexisting Permanent Variance No.	Applicant Name	Preexisting Variance Address of Record
25-V-115	BIG WAVE GROUP INC	380 Airport St. Princeton by the Sea, CA

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026, via videoconference, by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit in accordance with section 426.

2. At the hearing, James Day, with TK Elevator, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application for Modification of Permanent Variance
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the safety regulation requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. The Applicant requests modification of the address of the unchanging variance location specified within Board records for each conveyance the subject of previously granted Permanent Variance No. 25-V-115 therewith.
2. The Application declared to be wholly truthful under penalty of perjury by Application signatory, states facts upon which reasonably may be based a finding that the address, specified in the records of the Board, at which Permanent Variance No. 25-V-115M1 is in effect, in fact is more completely, and correctly the different combination of addresses specified in below subsection D.1.
3. Cal/OSHA has evaluated the request for modification of variance location address, finds no issue with it, and recommends that the application for modification be granted subject to the same conditions of the Decision and Order in Permanent Variance No. 25-V-115 therewith.
4. The Board finds the above subpart C.2 referenced declaration to be credible, uncontroverted, and consistent with available, sufficient facts, and of no bearing as to the finding of equivalent occupational health and safety upon which Grant of preexisting Permanent Variance No. 25-V-115 therewith was based.
5. The Board finds the correct address by which to designate the location of each conveyance the subject of Permanent Variance No. 25-V-115, to be:

386 Airport St.
Half Moon Bay, CA

D. Decision and Order

1. Permanent Variance Application No. 25-V-115M1 is conditionally GRANTED, thereby modifying Board records, such that, without change in variance location, each conveyance being the subject of Permanent Variance No. 25-V-115 therewith, shall have the following address designation:

386 Airport St.
Half Moon Bay, CA

2. Permanent Variance No. 25-V-115 therewith, being only modified as to the subject location address specified in above Decision and Order section 1, is otherwise unchanged and remaining in full force and effect, as hereby incorporated by reference into this Decision and Order of Permanent Variance No. 25-V-115M1.
3. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

4. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026

Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application to Modify Permanent Variance by:

UCSF Benioff Children's Hospital Oakland

Permanent Variance No: 25-V-362M1

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The following person or entity ("Applicant") has applied for a modification of permanent variance from a provision of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Preexisting Permanent Variance No.	Applicant Name	Preexisting Variance Address of Record
25-V-362	UCSF Benioff Children's Hospital Oakland	747 52nd St. Oakland, CA

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026, via videoconference, by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit in accordance with section 426.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application for Modification of Permanent Variance
PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the safety regulation requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. The Applicant requests modification of the address of the unchanging variance location specified within Board records for each conveyance the subject of previously granted Permanent Variance No. 25-V-362 therewith.
2. The Application declared to be wholly truthful under penalty of perjury by Application signatory, states facts upon which reasonably may be based a finding that the address, specified in the records of the Board, at which Permanent Variance No. 25-V-362M1 is in effect, in fact is more completely, and correctly the different combination of addresses specified in below subsection D.1.
3. Cal/OSHA has evaluated the request for modification of variance location address, finds no issue with it, and recommends that the application for modification be granted subject to the same conditions of the Decision and Order in Permanent Variance No. 25-V-362 therewith.
4. The Board finds the above subpart C.2 referenced declaration to be credible, uncontroverted, and consistent with available, sufficient facts, and of no bearing as to the finding of equivalent occupational health and safety upon which Grant of preexisting Permanent Variance No. 25-V-362 therewith was based.
5. The Board finds the correct address by which to designate the location of each conveyance the subject of Permanent Variance No. 25-V-362, to be:

688 52nd St.
Oakland, CA

D. Decision and Order

1. Permanent Variance Application No. 25-V-362M1 is conditionally GRANTED, thereby modifying Board records, such that, without change in variance location, each conveyance being the subject of Permanent Variance No. 25-V-362 therewith, shall have the following address designation:

688 52nd St.
Oakland, CA

2. Permanent Variance No. 25-V-362 therewith, being only modified as to the subject location address specified in above Decision and Order section 1, is otherwise unchanged and remaining in full force and effect, as hereby incorporated by reference into this Decision and Order of Permanent Variance No. 25-V-362M1.
3. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

4. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026

Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application to Modify Permanent Variance by:

MirKa Investments, LLC

Permanent Variance No: 25-V-388M1

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The following person or entity ("Applicant") has applied for a modification of permanent variance from a provision of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Preexisting Permanent Variance No.	Applicant Name	Preexisting Variance Address of Record
25-V-388	MirKa Investments, LLC	2136 South El Camino Oceanside, CA

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026, via videoconference, by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit in accordance with section 426.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application for Modification of Permanent Variance
PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the safety regulation requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. The Applicant requests modification of the address of the unchanging variance location specified within Board records for each conveyance the subject of previously granted Permanent Variance No. 25-V-388 therewith.
2. The Application declared to be wholly truthful under penalty of perjury by Application signatory, states facts upon which reasonably may be based a finding that the address, specified in the records of the Board, at which Permanent Variance No. 25-V-388M1 is in effect, in fact is more completely, and correctly the different combination of addresses specified in below subsection D.1.
3. Cal/OSHA has evaluated the request for modification of variance location address, finds no issue with it, and recommends that the application for modification be granted subject to the same conditions of the Decision and Order in Permanent Variance No. 25-V-388 therewith.
4. The Board finds the above subpart C.2 referenced declaration to be credible, uncontroverted, and consistent with available, sufficient facts, and of no bearing as to the finding of equivalent occupational health and safety upon which Grant of preexisting Permanent Variance No. 25-V-388 therewith was based.
5. The Board finds the correct address by which to designate the location of each conveyance the subject of Permanent Variance No. 25-V-388, to be:

2136 South El Camino Real
Oceanside, CA

D. Decision and Order

1. Permanent Variance Application No. 25-V-388M1 is conditionally GRANTED, thereby modifying Board records, such that, without change in variance location, each conveyance being the subject of Permanent Variance No. 25-V-388 therewith, shall have the following address designation:

2136 South El Camino Real
Oceanside, CA

2. Permanent Variance No. 25-V-388 therewith, being only modified as to the subject location address specified in above Decision and Order section 1, is otherwise unchanged and remaining in full force and effect, as hereby incorporated by reference into this Decision and Order of Permanent Variance No. 25-V-388M1.
3. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

4. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application to Modify Permanent Variance by:

Google, LLC

Permanent Variance No: 25-V-395M1

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The following person or entity ("Applicant") has applied for a modification of permanent variance from a provision of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Preexisting Permanent Variance No.	Applicant Name	Variance Address of Record	No. of Conveyances
25-V-395	Google, LLC	Google SBO North Building 1350 Grundy Ln. San Bruno, CA	8

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026, via videoconference, by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit in accordance with section 426.

2. At the hearing, Dan Leacox, with Leacox & Associates, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application for Modification of Permanent Variance
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the safety regulation requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. The Applicant requests modification as to the quantity of conveyances being the subject of previously granted Permanent Variance No. 25-V-395 therewith.
2. Cal/OSHA has evaluated the immediate request for modification of variance, finds no issue with it, and recommends that the application for modification be granted subject to the same conditions of the Decision and Order in Permanent Variance File No. 25-V-395 therewith.
3. The Board finds the declaration of the Applicant Signatory to be credible, uncontroverted, and consistent with available, sufficient facts, and finds the modification changing the quantity of subject conveyances from 7 to 8, to be of no bearing as to the finding of equivalent occupational health and safety upon which Grant of preexisting Permanent Variance No. 25-V-395 therewith was, in part, based.

D. Decision and Order

1. Application for Modification of Permanent Variance, No. 25-V-395M1, is conditionally GRANTED, as specified below, such that a total of 8 conveyances are the subject of Permanent Variance No. 25-V-395 therewith.
2. Permanent Variance No. 25-V-395 being only modified as to the subject quantity of conveyances specified in above Decision and Order section 1, is otherwise unchanged and remaining in full force and effect, as hereby incorporated by reference into Modification of Permanent Variance 25-V-395M1.
3. The applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way that the Applicant was required to notify them of the application for permanent variance, per sections 411.2 and 411.3.
4. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application to Modify Permanent Variance by:

292 Barham, LLC

Permanent Variance No: 26-V-183M1

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The following person or entity ("Applicant") has applied for a modification of permanent variance from a provision of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Preexisting Permanent Variance No.	Applicant Name	Preexisting Variance Address of Record
26-V-183	292 Barham, LLC	300 E. Barham Dr. San Marcos, CA

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026, via videoconference, by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit in accordance with section 426.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application for Modification of Permanent Variance
PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the safety regulation requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. The Applicant requests modification of the address of the unchanging variance location specified within Board records for each conveyance the subject of previously granted Permanent Variance No. 26-V-183 therewith.
2. The Application declared to be wholly truthful under penalty of perjury by Application signatory, states facts upon which reasonably may be based a finding that the address, specified in the records of the Board, at which Permanent Variance No. 26-V-183M1 is in effect, in fact is more completely, and correctly the different combination of addresses specified in below subsection D.1.
3. Cal/OSHA has evaluated the request for modification of variance location address, finds no issue with it, and recommends that the application for modification be granted subject to the same conditions of the Decision and Order in Permanent Variance No. 26-V-183 therewith.
4. The Board finds the above subpart C.2 referenced declaration to be credible, uncontroverted, and consistent with available, sufficient facts, and of no bearing as to the finding of equivalent occupational health and safety upon which Grant of preexisting Permanent Variance No. 26-V-183 therewith was based.
5. The Board finds the correct address by which to designate the location of each conveyance the subject of Permanent Variance No. 26-V-183, to be:

400 Central Park Place
San Marcos, CA

D. Decision and Order

1. Permanent Variance Application No. 26-V-183M1 is conditionally GRANTED, thereby modifying Board records, such that, without change in variance location, each conveyance being the subject of Permanent Variance No. 26-V-183 therewith, shall have the following address designation:

400 Central Park Place
San Marcos, CA

2. Permanent Variance No. 26-V-183 therewith, being only modified as to the subject location address specified in above Decision and Order section 1, is otherwise unchanged and remaining in full force and effect, as hereby incorporated by reference into this Decision and Order of Permanent Variance No. 26-V-183M1.
3. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

4. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application to Modify Permanent Variance by:

Board of Trustees of the California State University

Permanent Variance No: 26-V-321M1

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The following person or entity ("Applicant") has applied for a modification of permanent variance from a provision of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Preexisting Permanent Variance No.	Applicant Name	Preexisting Variance Address of Record
26-V-321	Board of Trustees of the California State University	6000 J St. Sacramento, CA

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026, via videoconference, by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit in accordance with section 426.

2. At the hearing, James Day, with TK Elevator, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application for Modification of Permanent Variance
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the safety regulation requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. The Applicant requests modification of the address of the unchanging variance location specified within Board records for each conveyance the subject of previously granted Permanent Variance No. 26-V-321 therewith.
2. The Application declared to be wholly truthful under penalty of perjury by Application signatory, states facts upon which reasonably may be based a finding that the address, specified in the records of the Board, at which Permanent Variance No. 26-V-321M1 is in effect, in fact is more completely, and correctly the different combination of addresses specified in below subsection D.1.
3. Cal/OSHA has evaluated the request for modification of variance location address, finds no issue with it, and recommends that the application for modification be granted subject to the same conditions of the Decision and Order in Permanent Variance No. 26-V-321 therewith.
4. The Board finds the above subpart C.2 referenced declaration to be credible, uncontroverted, and consistent with available, sufficient facts, and of no bearing as to the finding of equivalent occupational health and safety upon which Grant of preexisting Permanent Variance No. 26-V-321 therewith was based.
5. The Board finds the correct address by which to designate the location of each conveyance the subject of Permanent Variance No. 26-V-321, to be:

6018 J St.
Sacramento, CA

D. Decision and Order

1. Permanent Variance Application No. 26-V-321M1 is conditionally GRANTED, thereby modifying Board records, such that, without change in variance location, each conveyance being the subject of Permanent Variance No. 26-V-321 therewith, shall have the following address designation:

6018 J St.
Sacramento, CA

2. Permanent Variance No. 26-V-321 therewith, being only modified as to the subject location address specified in above Decision and Order section 1, is otherwise unchanged and remaining in full force and effect, as hereby incorporated by reference into this Decision and Order of Permanent Variance No. 26-V-321M1.
3. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

4. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026

Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-412	Pacific West Communities	57 Inyo St. Mammoth Lakes, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; and Mark Wickens and Jose Ceja appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-412	1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-417	Farmersville Gardenia Senior Associates, LP	136 E. Kirsten St. Farmersville, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-418	Fontana Unified School District	5124 Oak Grove Ave. Fontana, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Mark Wickens and Jose Ceja appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-418	1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-419	447 Burchett Street LLC	447 Burchett St. Glendale, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-420	Kingsley Project LLC	939 S. Kingsley Dr. Los Angeles, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-421	1723 Corinth LP	1723 S. Corinth Ave. Los Angeles, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-422	2800 Telegraph Partners LLC	2800 Telegraph Ave. Berkeley, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2O and/or Gen3 Peak with Variant Governor Rope and Sheaves & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-423	Sutter Bay Hospitals	3501 Cesar Chavez St. San Francisco, CA	1

2. These proceedings are conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026, and via teleconference, by Occupational Safety and Health Standards Board ("Board") with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit, as a basis of proposed decision to be advanced to the Board for its consideration, in accordance with section 426.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit

PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Applicable Regulation

1. The Applicants request variance from some or all of the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the subject of those applications:

    a. Suspension Means: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4, and 2.20.9.5.4 (to permit the use of the Elastomeric Coated Steel Belts proposed by the Applicant in lieu of circular steel suspension ropes.);

    b. Cartop Railing: 2.14.1.7.1 (to permit the use of the car top railing system proposed by the Applicant, where the railing system is located inset from the elevator car top perimeter);

    c. Inspection transfer switch: 2.26.1.4.4(a) (to permit the inspection transfer switch to reside at a location other than the machine room);

    d. Seismic reset switch: 8.4.10.1.1(a)(2)(b) (to permit the seismic reset switch to reside at a location other than the machine room);

    e. Governor Rope Diameter: 2.18.5.1 (to permit the use of the governor rope proposed by the Applicant, where the rope has a diameter of 8 mm [0.315 in.]); Note: A variance from the section above is not required. However, the Board has included a variance from this code requirement in similar previous variances.

    f. Pitch Diameter: 2.18.7.4 (to permit the use of the speed governor system, proposed by the Applicant, where the rope sheave pitch diameter is less than what is required by the Elevator Safety Orders).

    g. Minimum Inside Car Platform Dimensions: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

D. Findings of Fact

1. The Board incorporates by reference the findings stated in:

    a. Items 3 through 5.c, 5.e, and 5.f of the "Findings of Fact" section of the Proposed Decision adopted by the Board on February 19, 2009, in Permanent Variance No. 08-V-247;

    b. Item D.3 of the Proposed Decision adopted by the Board on July 16, 2009, in Permanent Variance No. 09-V-042;

c. Item D.4 of the Proposed Decision adopted by the Board on September 16, 2010, in Permanent Variance No. 10-V-029;

d. Items D.4, D.5, and D.7 of the Proposed Decision adopted by the Board on July 18, 2013, in Permanent Variance No. 12-V-146; and

e. Items D.4 and D.5 of the Proposed Decision adopted by the Board on September 25, 2014, in Permanent Variance No. 14-V-170.

f. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for OSHSB File No. 22-V-302 regarding medical emergency car dimensions.

2. Regarding requested variance in governor sheave diameter, and governor rope diameter, in variance from section 3141, incorporated ASME A17.1-2004, sections 2.18.7.4 and 2.18.5.1, respectively, the Board incorporates by reference the following previous findings of record: Items 8 through 12 of the Proposed Decision adopted by the Board on December 13, 2018, in Permanent Variance No. 18-V-425, and further substantiating bases per therein cited Permanent Variance Decisions of the Board.
3. The installation contracts for elevators, the subject of the permanent variance application, were signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders ("ESO").
4. Cal/OSHA safety engineers, by way of written submissions to the record (Exhibit PD-3), and positions stated at hearing, are of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

E. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

F. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, Applicant shall have permanent variances from section 3141 and from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the subject of those applications:

- Suspension Means: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4, and 2.20.9.5.4 (To permit the use of the Elastomeric Coated Steel Belts proposed by the Applicant in lieu of circular steel suspension ropes.);
- Cartop Railing: 2.14.1.7.1 (To permit the use of the car top railing system proposed by the Applicant, where the railing system is located inset from the elevator car top perimeter);
- Inspection transfer switch: 2.26.1.4.4(a) (To permit the inspection transfer switch to reside at a

location other than the machine room);

- Seismic reset switch: 8.4.10.1.1(a)(2)(b) (To permit the seismic reset switch to reside at a location other than the machine room);
- Governor Rope Diameter: 2.18.5.1 (To permit the use of the governor rope proposed by the Applicant, where the rope has a diameter of 8 mm [0.315 in.]); Note: A variance from the section above is not required. However, the Board has included a variance from this code requirement in similar previous variances.
- Pitch Diameter: 2.18.7.4 (To permit the use of the speed governor system, proposed by the Applicant, where the rope sheave pitch diameter is less than what is required by the Elevator Safety Orders).
- Minimum Inside Car Platform Dimensions: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

The variance shall be subject to, and limited by, the following additional conditions:

1. Each elevator subject to this variance shall comply with all applicable Group IV Elevator Safety Orders and with all ASME provisions made applicable by those Group IV Elevator Safety Orders, except those from which variances are granted, as set forth in the prefatory portion of this Decision and Order.
2. The suspension system shall comply with the following:
    a. The coated steel belt shall have a factor of safety at least equal to the factor of safety that ASME A17.1-2004, section 2.20.3, would require for wire ropes if the elevator were suspended by wire ropes rather than the coated steel belt.
    b. Steel-coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    f. The coated steel belts used shall be accepted by Cal/OSHA.
    g. The installation of belts and connections shall be in conformance with the manufacturer's specifications, which shall be provided to Cal/OSHA.
3. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, a copy of which is attached hereto as Addendum 1 and incorporated herein by this reference.

4. The Applicant shall not utilize each elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device, and criteria for belt replacement, and shall make those procedures and criteria available to Cal/OSHA upon request.
5. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:
    a. The width and thickness in millimeters or inches;
    b. The manufacturer's rated breaking strength in (kN) or (lbf);
    c. The name of the person who, or organization that, installed the flat coated steel belts;
    d. The month and year the flat coated steel belts were installed;
    e. The month and year the flat coated steel belts were first shortened;
    f. The name or trademark of the manufacturer of the flat coated steel belts;
    g. Lubrication information.
6. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:
    a. The number of belts,
    b. The belt width and thickness in millimeters or inches, and
    c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).
7. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
8. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a), does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. When the inspection and test control panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
10. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
11. If there is an inset car top railing:
    a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs, or inspections. The Applicant shall not permit anyone to stand on or climb over the car top railing.
    b. The distance that the car top railing may be inset from the car top perimeter shall be

limited to no more than 6 inches.

c. All exposed areas of the car top outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or the car top outside the railing, shall be clearly marked. The markings shall consist of alternating four-inch diagonal red and white stripes.

e. The Applicant shall provide, on each inset railing, durable signs with lettering not less than ½ inch on a contrasting background. Each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top, and not from the required bevel).

11. The speed governor rope and sheaves shall comply with the following:

a. The governor shall be used in conjunction with a 8 mm (0.315 in.) diameter steel governor rope with 8-strand, regular lay construction.

b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

c. The governor sheaves shall have a pitch diameter of not less than 240 mm (9.45 in.).

12. Each elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen2(O) and/or Gen3 Peak elevator system the Applicant proposes to use, in accordance with the written procedures and criteria required by Condition No. 4 and the terms of this permanent variance.

13. All medical emergency service elevators shall comply with the following:

a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21- inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5 inch (127 mm) radius corners] in the horizontal, open position.

b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing,

or testing of the elevators shall be provided a copy of this variance decision.

15. Cal/OSHA shall be notified when each elevator is ready for inspection. Each elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before each elevator is placed in service.
16. The Applicant shall be subject to the suspension means replacement reporting condition stated in Addendum 2; that condition is incorporated herein by this reference.
17. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way that the Applicant was required to notify them of the application for permanent variance, per sections 411.2 and 411.3.
18. This Decision and Order shall remain in effect unless duly modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

TK Elevator SIL/GREEN

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-424	Park Place San Mateo Owner, LP	1100 Park Place San Mateo, CA	3

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, James Day, with TK Elevator Corporation, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	**Description of Exhibit**

PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. On July 24, 2026, Mr. James Day, of TK Elevator Corporation, representing the Applicant, applied for a permanent variance from the provisions of the California Code of Regulations, Title 8, Section 3141 [ASME A17.1-2004, Sections 2.26.9.3, 2.26.9.4, 2.26.9.6.1, 2.26.9.6.4 and 2.26.8] of the Elevator Safety Orders (ESO), with respect to redundant failure protections, the use of software reliant means to remove power from the driving motor and brake, the use of Safety Integrity Level (SIL)-rated circuitry in place of a electromechanical relay, and the use of SIL-rated circuitry in place of an additional contactor, for three (3) elevator(s) located at 1100 Park Place, San Mateo, CA.
2. This application is to permit the replacement of faulty elevator motor and brake control device(s) (Drive) with a drive assembly utilizing SIL-rated circuitry to monitor, process, and execute specific critical safety functions. The proposal to utilize the TK Elevator "SIL/GREEN" model drive assembly does not conform with certain aspects of the Elevator Safety Orders.
3. The TK Elevator "SIL/GREEN" model drive has several design features that are similar to those employed by TK Elevator EVO and EOX products.
4. The Cal/OSHA believes the application requires a permanent variance from CCR, Title 8, Section 3141, [ASME A17.1-2004, sections]:

   • 2.26.9.4; to permit the use of software reliant means to remove power from the driving motor and brake.

   • 2.26.9.6.1; to permit the use of SIL-rated circuitry in place of an electromechanical relay to inhibit current flow to the drive machine motor.

   • 2.26.8.2; to permit the use of SIL-rated circuitry in place of an electromechanical relay to remove power from the brake.

   • 2.26.9.6.4; to permit the use of SIL-rated circuitry in place of an additional contactor to remove power from the driving-machine brake circuit.
5. The Cal/OSHA does not believe a permanent variance is required from ASME A17.1-2004, section 2.26.9.3, as the failure protections it requires will be provided by the Applicant's proposal.
6. The Applicant proposes the use of SIL-rated software and circuits to direct the removal of power to the elevator's driving machine. The Applicant asserts that their SIL-rated software and circuits meet the requirements of ASME A17.1-2019, section 2.26.9, for the use of SIL-rated systems in

this role, providing equivalent safety to the existing ESO.

7. The Applicant asserts that their proposed motor control system meets the requirements of ASME A17.1-2019, section 2.26.9 for the use of SIL-rated circuits in this role and provides equivalent safety to the existing ESO.

D. Relevant Safety Orders

Software-Controlled Means to Remove Power from Driving Machine Motor

ASME A17.1-2004 allows the use of software systems to provide redundancy, provided that the removal of power from the driving-machine and brake is not solely dependent on software-controlled means.

Section 3141**[ASME A17.1-2004, Section 2.26.9.4**] states:

> *"**2.26.9.4** Redundant devices used to satisfy **2.26.9.3** in the determination of the occurrence of a single ground, or the failure of any single magnetically operated switch, contactor or relay, or of any single solid state device, or any single device that limits the leveling or truck zone, or a software system failure, shall be checked prior to each start of the elevator from a landing, when on automatic operation. When a single ground or failure, as specified in 2.26.9.3, occurs, the car shall not be permitted to restart. Implementation of redundancy by a software system is permitted, provided that the removal of power from the driving-machine motor and brake **shall not be solely dependent on software-controlled means**."*

The intent of the relevant portion of ASME A17.1-2004 section 2.26.9.4 is to address hazards associated with exclusive reliance on software to remove power from the elevator's driving machine and brake when device or circuit failure is detected (see ASME A17.1-2004, section 2.26.9.3).

More recent editions of ASME A17.1 have recognized that systems that have undergone extensive evaluation, testing, and certification processes can achieve equivalent or superior safety outcomes. These recent editions of ASME A17.1 contain requirements that govern the certification and use of these SIL-rated circuits, software, and devices.

The Applicant proposes the use of SIL-rated software and circuits to direct the removal of power from the elevator's driving-machine motor and brake. The Applicant asserts that their SIL-rated software and circuits meet the requirements of ASME A17.1-2019, section 2.26.9.3.2(b), for the use of SIL-rated systems in this role, providing equivalent safety to the existing ESO.

ASME A17.1-2019, Section 2.26.9.3.2] states:

> *"**2.26.9.3.2** Methods used to satisfy 2.26.9.3.1 using software systems are permitted, provided that one of the following applies:*
>
> *(a) a non-software-controlled means is also used to remove power from the driving-machine motor and brake.*
>
> *(b) the software system and related circuits are listed/certified to a SIL rating that is in accordance with the applicable requirements of IEC 61508-2 and IEC 61508-3. This software system and its related circuits shall have a SIL not less than the highest SIL value of the safety function(s) in Table 2.26.4.3.2 used in the circuit. The software system and related circuits shall be identifiable on wiring diagrams [see 8.6.1.2.2(a)] with part identification, SIL, and certification identification information that shall be in accordance with the certifying*

organization's requirements. Assemblies containing SIL rated devices shall be labeled or tagged with the statement: "Assembly contains SIL rated devices. Refer to Maintenance Control Program and wiring diagrams prior to performing work."

The TK Elevator TAC32T elevator controller with the *"SIL/GREEN"* Drive motor control, employs a listed and certified SIL software system and control means to remove power from the driving-machine motor and brake, as protection against failures (see ASME A17.1-2004, section 2.26.9.3). The SIL-rated circuits are listed and certified in accordance with ASME A17.1-2019 and IEC 61508-2 and IEC 61508-3.

The Board has previously granted permanent variances permitting a similar use of a SIL-rated software system and control means to meet this requirement (Permanent Variance No. 26-V-028). Cal/OSHA believes that the use of SIL-rated software systems and circuits, as proposed by the Applicant, and the recommended conditions below, provides equivalent safety to the existing ESO.

SIL-rated System to Inhibit Current Flow to Alternating Current (AC) Drive Motor

When an elevator driving machine employs an alternating current motor that is powered by direct current through solid state devices, ASME A17.1-2004 requires two separate means of removing power from the driving-machine motor, one of which shall be an electromechanical relay.

Section 3141[**ASME A17.1-2004, Section 2.26.9.6.1**] states:

> *"**2.26.9.6.1** Two separate means shall be provided to independently inhibit the flow of alternating-current through the solid-state devices that connect the direct-current power source to the alternating-current driving motor. At least one of the means shall be an electromechanical relay."*

The intent of ASME A17.1-2004, section 2.26.9.6.1 is to provide protection in the event of a motor controller (inverter) failure, by requiring two independent means to interrupt electrical current to the drive motor. The ability to remove electrical power from an elevator's driving machine motor is essential in preventing undirected and hazardous movement of an elevator car. The current ESO requires two separate means to perform this critical safety function, one of which must be an electromechanical relay that is monitored by the control system for proper function (see ASME A17.1-2004, section 2.26.9.6.6).

As previously stated, more recent editions of ASME A17.1 have recognized that systems that have undergone extensive evaluation, testing, and certification processes can achieve equivalent or superior safety outcomes. More recent editions of ASME A17.1 contain requirements that govern the certification and use of these SIL-rated circuits, software, and devices.

The Applicant asserts that their proposed motor control system meets the requirements of ASME A17.1-2019, Section 2.26.9.6.1(b) for the use of SIL-rated circuits in this role and provides equivalent safety to the existing ESO.

ASME A17.1-2019, Section 2.26.9.6.1] states in part:

> *"**2.26.9.6.1** Two separate means shall be provided to independently inhibit the flow of alternating current through the solid-state devices that connect the DC power source to the AC driving motor. At least one of the means shall conform to either (a) or (b).*
>
> *(a) An electromechanical relay…*
>
> *(b) An E/E/PES with a SIL not less than the highest SIL value of the applicable function as shown in Table 2.26.4.3.2 for the electrical protective devices involved and shall be listed/certified to a SIL rating that is in accordance with the applicable requirements of IEC 61508-2 and IEC*
>
> *61508-3. It shall be identifiable on wiring diagrams (see 8.6.1.6.3) with*
>
> *part identification, SIL, and certification identification information that shall be in accordance with the certifying organization's requirements. Assemblies containing SIL rated devices shall be labeled or tagged with the statement: "Assembly contains SIL rated devices. Refer to Maintenance Control Program and wiring diagrams prior to performing work."*

The Board has previously granted permanent variances permitting a similar use of a SIL-rated software system and control means to meet this requirement (Permanent Variance No. 26-V-028).

Cal/OSHA believes that the use of SIL-rated software systems and circuits, as proposed by the Applicant, and the recommended conditions below, provides equivalent safety to the existing ESO.

Release and Application of Driving-Machine Brakes (2.26.8.2)

ASME A17.1-2004 requires two devices to independently remove power from the driving- machine brake, an electromechanical relay and/or the other to be a contactor. Solid-state and/or software devices are prohibited in these applications.

Section 3141 [**ASME A17.1-2004, Section 2.26.8.2]** states:

> *"**2.26.8 Release and Application of Driving-Machine Brakes***
>
> ***2.26.8.2** Two devices shall be provided to independently remove power from the brake. If the brake circuit is ungrounded, all power feed lines to the brake shall be opened."*

The intent of **ASME A17.1-2004 Section 2.26.8.2** is to require redundant, independent, electromechanical contactors as means of removing power from the driving-machine brake, thereby preventing exclusive reliance on a single switching means for this safety-critical function. The use of SIL-rated software systems and circuits to replace one or both electromechanical contactors is not permitted by the ESO, in this application.

As previously stated, more recent editions of ASME A17.1 have recognized that systems that have undergone extensive evaluation, testing, and certification processes can achieve equivalent or superior safety outcomes. More recent editions of ASME A17.1 contain requirements that govern the certification and use of these SIL-rated circuits, software, and devices.

The application states:

"The applicant through TKE is proposing to use a SIL (Safety Integrity Level) rated device to provide protection against a single ground or single fault failure. The applicant believes equivalent or superior safety is provided by complying with ASME A17.1-2019, 2.26.8.2, 2.26.9. 2.26.9.6.1. Newer Code References are revised and renumbered requirements 2.26.9.3 and 2.26.9.4 to allow the use of SIL rated devices to provide equivalent or better protection against single ground or single fault conditions. The Green drive system uses the TAC32T controller (Cal/OSHA reviewed and accepted the Green drive (motor controller) with SIL 3 rated motor control, while still employing two means to remove power from the motor and brake.

The related circuits are listed/certified to a SIL rating that is in accordance with the applicable requirements of ASME A17.l/B44 2019 and in accordance with IEC 61508-2 and IEC 61508-3. In doing this the applicant believes equivalent safety has been achieved".

ASME A17.1-2019, 2.26.8 Release and Application of Driving-Machine Brakes states:

*"**2.26.8.2** Two means shall be provided to independently remove power from the brake. The electrical protective devices required by 2.26.2 shall control both means, except that leveling shall be permitted to take place with power opening of doors and gates in conformance with 2.13.2.1.1 and 2.13.2.2.1."*

One of the means shall be either a contactor or a SIL rated device(s) with a SIL of not less than the highest SIL of the function for the electrical protective devices involved with removing power from the brake and shall be listed/certified in accordance with the applicable requirements of IEC 61508-2 and IEC 61508-3. SIL rated devices shall be identifiable on wiring diagrams [see 8.6.1.2.2(a)] with part identification, SIL, and certification identification information that shall be in accordance with the certifying organization's requirements. This means is not required to remove power from the driving-machine motor.

If the brake circuit is ungrounded, power shall be interrupted at all power feed lines to the brake.

Assemblies containing SIL rated devices shall be labeled or tagged with the statement: "Assembly contains SIL rated devices. Refer to Maintenance Control Program and wiring diagrams prior to performing work."

The Board has NOT previously granted a permanent variance for a similar proposal.

Cal/OSHA believes that the use of SIL-rated software systems and circuits, as proposed by the Applicant, and the recommended conditions below, provides equivalent safety to the existing ESO.

Release and Application of Driving-Machine Brakes (2.6.9.6.4)

ASME A17.1-2004 requires a contactor to open the driving-machine brake circuit. Solid-state and/or software devices are prohibited for this application.

Section 3141 [**ASME A17.1-2004, Section 2.26.9.6.4**] states:
*"**2.26.9.6.4 Release and Application of Driving-Machine Brakes***
***2.26.9.6.4** An additional contactor shall be provided to also open the driving-*

machine brake circuit. This contactor is not required to have contacts in the driving machine motor circuit"

As previously stated, more recent editions of ASME A17.1 have recognized that systems that have undergone extensive evaluation, testing, and certification processes can achieve equivalent or superior safety outcomes. More recent editions of ASME A17.1 contain requirements that govern the certification and use of these SIL-rated circuits, software, and devices.

Similar to **ASME A17.1-2004 Section 2.26.8.2** above, the intent of **ASME A17.1-2004 Section 2.26.9.6.4 is** to require redundant, independent, electromechanical contactors as means of removing power from the driving-machine brake, thereby preventing exclusive reliance on a single switching means for this safety-critical function. The use of SIL-rated software systems and circuits in place of a contactor is not permitted by the ESO, in this application.

The Applicant proposes the use of a SIL-rated device as the exclusive means to open the driving-machine brake circuit. The Applicant asserts that their SIL-rated software and circuits meet the requirements of ASME A17.1-2019, section 2.26.9.6.1(b), for the use of SIL-rated systems in this role, providing equivalent safety to the existing ESO.

ASME A17.1-2019, 2.26.9.6.1 states:

*"**2.26.9.6.1** Two separate means shall be provided to independently inhibit the flow of alternating current through the solid-state devices that connect the DC power source to the AC driving motor. At least one of the means shall conform to either (a) or (b).*

(a) An electromechanical relay arranged to either

(1) open each time the car stops

(2) open, at the latest, each time the car reverses direction, except for releveling; it shall be verified at each stop that there is no current flow exceeding normal leakage current through the other means

(b) An E/E/PES with a SIL not less than the highest SIL value of the applicable function as shown in Table 2.26.4.3.2 for the electrical protective devices involved and shall be listed/certified to a SIL rating that is in accordance with the applicable requirements of IEC 61508-2 and IEC 61508-3. It shall be identifiable on wiring diagrams (see 8.6.1.6.3) with part identification, SIL, and certification identification information that shall be in accordance with the certifying organization's requirements. Assemblies containing SIL rated devices shall be labeled or tagged with the statement: "Assembly contains SIL rated devices. Refer to Maintenance Control Program and wiring diagrams prior to performing work."

Cal/OSHA believes that the use of SIL-rated software systems and circuits, as proposed by the Applicant, and the recommended conditions below, provides equivalent safety to the existing ESO.

E. Decision and Order

Applicant is hereby conditionally GRANTED Permanent Variance as specified below, and to the limited extent, as of the date the Board adopts this Proposed Decision, with respect to the section A specified number of TKE SIL GREEN elevator(s), at the specified location, each shall conditionally hold permanent variance from the following subparts of ASME A17.1-2004, currently incorporated by reference into section 3141 of the Elevator Safety Orders:

- Software Reliant Means to Remove Power: 2.26.9.4 (Limited to the extent necessary to permit the exclusive use of SIL-rated software systems as a means to remove power from the driving machine motor and brake)
- SIL-Rated Circuitry to Inhibit Current Flow: 2.26.9.6.1 (Limited to the extent necessary to permit the use of SIL-rated circuitry in place of an electromechanical relay to inhibit current flow to the drive motor)
- Release and Application of Driving-Machine Brakes: 2.26.8.2 and 2.26.9.6.4: (Limited to the extent necessary to permit the use of SIL-rated circuitry, in place of an electromechanical relay, to remove power from the brake).

1. The SIL-rated software system and related circuits used to provide device/circuit redundancy and to inhibit electrical current flow in accordance with ASME A17.1-2004 – 2.26.9.4, 2.26.9.6.1, 2.26.8.2 and 2.26.9.6.4 shall comply with the following:

    a. Printed circuit board assembly SSOA (6300AHE001), containing Safe Torque Off (STO) and Safe Brake Control (SBC) functions, labeled or marked with the SIL rating (not less than SIL 3), the name or mark of the certifying organization, and the SIL certification number (968/FSP 1347), followed by the applicable revision number (as in 968/FSP 1347.02/21).
    b. The software system and related circuits shall be certified for compliance with the applicable requirements of ASME A17.1-2019 Section 2.26.9.3.2(b), Table 2.26.4.3.2, Sections 2.26.9.6.1(b) and 2.26.8.2
    c. The access door or cover of the enclosures containing the SIL-rated components shall be clearly labeled or tagged on their exterior with the statement:

    Assembly contains SIL-rated devices.
    Refer to Maintenance Control Program and wiring diagrams
    prior to performing work.

    d. Unique maintenance procedures or methods required for the inspection, testing, or replacement of the SIL-rated circuits shall be developed and a copy maintained in the elevator machine/control room/space. The procedures or methods shall include clear color photographs of each SIL-rated component, with notations identifying parts and locations.
    e. Wiring diagrams that include part identification, SIL, and certification information shall be maintained in the elevator machine/control room/space.
    f. A successful test of the SIL-rated software system and its related circuits shall be conducted initially and not less than annually in accordance with the testing procedure. The test shall demonstrate that SIL-rated devices, safety functions, and related circuits operate as intended.
    g. Any alterations to the SIL-rated software system and its related circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific provisions for the alteration of SIL-rated devices, the alterations shall be made in conformance with ASME A17.1-2019, Section 8.7.1.9.
    h. Any replacement of the SIL-rated software system or its related circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific

provisions for the replacement of SIL-rated devices, the replacement shall be made in conformance with ASME A17-1-2019, section 8.6.3.14.

i. Any repairs to the SIL-rated software system and its related circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific provisions for the repair of SIL-rated devices, the repairs shall be made in conformance with ASME A17.1-2019, section 8.6.2.6.

j. Any space containing SIL-rated software or circuits shall be maintained within the temperature and humidity range specified by TK Elevator Corporation. The temperature and humidity range shall be posted on each enclosure containing SIL-rated software or circuits.

k. Field software changes to the SIL-rated system are not permitted. Any changes to the SIL-rated system's software or circuitry will require recertification and all necessary updates to the documentation and diagrams required by conditions d. and e. above.


2. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and all applicable requirements met, including conditions of this permanent variance, prior to a Permit to Operate the elevator being issued. The elevator shall not be placed in full service prior to the Permit to Operate being issued by Cal/OSHA.

3. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2, and 411.3.

4. This Decision and Order shall remain in effect unless duly modified or revoked upon application by Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

Dated: September 29, 2026

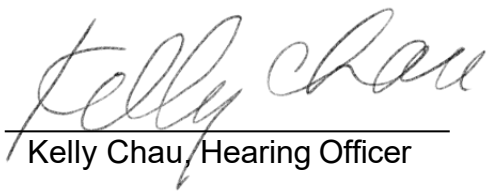

Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-425	Tampa Sherman, LP	7143 N. Tampa Ave. Los Angeles, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

TK Elevator EOX

Permanent Variance No: See section A.1 table below
PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-426	Raul F. Hernandez	3981 Louisiana St. San Diego, CA	1
26-V-476	733 TREAT LLC	733 Treat Ave. San Francisco, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, James Day, with TK Elevator Corporation, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Applicant proposes to install a standard railing on the car top and believes equivalent or superior safety is achieved by complying with ASME A17.1-2019, 2.14.1.7.1. This standard allows the railing to be in-set in order to create a space around the top rail to provide greater clearances when the hand is placed on the rail. The EOX standard rail is-inset approximately 3.75 inches. TKE will bevel any area of exposed cartop outside the standard rail greater than 4". By meeting the requirements in ASME A17.1-2019 and any additional beveling is how the applicant believes equivalent or superior safety is achieved.
2. Applicant proposes to utilize an engineered belt-type suspension product (ECSB) that arranges steel tension members longitudinally in an elastomeric coating using specifically designed fastenings for attachment. The Applicant asserts that the proposed ECSB suspension complies with the more recent edition of ASME A17.1-2019, which contains specific requirements for this type of suspension means. The Applicant asserts that proposed suspension means provides equivalent safety through compliance with the provisions contained in ASME A17.1-2019, ASME A17.6-2017 and the following:
    A. Belt tension monitoring.
    B. Slack belt detection (Broken suspension)
    C. Slip detection (traction loss)
    D. Factor of safety in accordance with the code.
    E. Residual Strength Detection Device (RSDD) accepted by Cal/OSHA.
    F. Visual inspections of the suspension elements at 6 months, and annually thereafter.
    G. Maintain manufacturer's quality control in accordance with ASME A17.6-2017 section 3.6.
3. The Applicant proposes the use of SIL-rated software and circuits to direct the removal of power to the elevator's driving machine. The Applicant asserts that their SIL-rated software and circuits meet the requirements of ASME A17.1-2019, section 2.26.9, for the use of SIL-rated systems in this role, providing equivalent safety to the existing ESO.
4. The Applicant asserts that their proposed motor control system meets the requirements of ASME A17.1-2019, section 2.26.9 for the use of SIL-rated circuits in this role and provides equivalent safety to the existing ESO.

5. The applicant asserts that equivalent safety is attained by relocating the inspection transfer switch and the seismic reset switch to the "Control Room". Newer standards define spaces and rooms beyond a machine room (Machine Space, Control Space, etc.). The applicant through TKE believes equivalent safety is achieved by complying with the requirements in ASME A17.1-2019, section 2.26.1.4. machine rooms control rooms and control spaces are secured by a Group 1 security key, which would limit access to elevator personnel only.

D. Relevant Safety Orders

Variance Request No. 1 (ASME A17.1-2004, section 2.14.1.7.1)

2.14.1.7.1 A standard railing conforming to 2.10.2 shall be provided on the outside perimeter of the car top on all sides where the perpendicular distance between the edges of the car top and the adjacent hoistway enclosure exceeds 300 mm (12 in.) horizontal clearance.

Variance Request No. 2a (ASME A17.1-2004, section 2.20.1)

2.20.1 Suspension Means

Elevator cars shall be suspended by steel wire ropes attached to the car frame or passing around sheaves attached to the car frame specified in 2.15.1. Ropes that have previously been installed and used on another installation shall not be reused.

Only iron (low carbon steel) or steel wire ropes, having the commercial classification "Elevator Wire Rope," or wire rope specifically constructed for elevator use, shall be used for the suspension of elevator cars and for the suspension of counterweights. The wire material for ropes shall be manufactured by the open hearth or electric furnace process or their equivalent.

Variance Request No. 2b1 (ASME A17.1-2004, section 2.20.2[.1])

2.20.2.1 On Crosshead Data Plate.

The crosshead data plate required by 2.16.3 shall bear the following wire rope data:

(a) the number of ropes

(b) the diameter in millimeters (mm) or inches (in.)

(c) the manufacturer's rated breaking strength per rope in kilo Newton (kN) or pounds (lb)

Variance Request No. 2b2 (ASME A17.1-2004, section 2.20.2.2)

2.20.2.2 On Rope Data Tag.

A metal data tag shall be securely attached to one of the wire rope fastenings. This data tag shall bear the following wire rope data:

(a) the diameter in millimeters (mm) or inches (in.)

[…]

(f) whether the ropes were nonpreformed or preformed

[…]

Variance Request No. 2c (ASME A17.1-2004, section 2.20.3)

2.20.3 Factor of Safety

The factor of safety of the suspension wire ropes shall be not less than shown in Table 2.20.3. Figure 8.2.7 gives the minimum factor of safety for intermediate rope speeds. The factor of safety shall be based on the actual rope speed corresponding to the rated speed of the car.

The factor of safety shall be calculated by the following formula:

$$f = \frac{(S \times N)}{W}$$

where

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

Variance Request No. 2d (ASME A17.1-2004, section 2.20.4)

2.20.4 Minimum Number and Diameter of Suspension Ropes

The minimum number of hoisting ropes used shall be three for traction elevators and two for drum type elevators.

Where a car counterweight is used, the number of counterweight ropes used shall be not less than two.

The term "diameter," where used in reference to ropes, shall refer to the nominal diameter as given by the rope manufacturer.

The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.

Variance Request No. 2e (ASME A17.1-2004, section 2.20.9[.1])

2.20.9 Suspension Rope Fastening

2.20.9.1 Type of Rope Fastenings. The car and counterweight ends of suspension wire ropes, or the stationary hitch ends where multiple roping is used, shall be fastened in such a manner that all portions of the rope, except the portion inside the rope sockets, shall be readily visible.

Fastening shall be

(a) by individual tapered rope sockets (see 2.20.9.4) or other types of rope fastenings that have undergone adequate tensile engineering tests, provided that

(1) such fastenings conform to 2.20.9.2 and 2.20.9.3;

(2) the rope socketing is such as to develop at least 80% of the ultimate breaking strength of the strongest rope to be used in such fastenings; or

(b) by individual wedge rope sockets (see 2.20.9.5); and

(c) Ubolt type rope clamps or similar devices shall not be used for suspension rope fastenings.

Variance Request No. 3 (ASME A17.1-2004, section 2.26.1.4[.4](a))

2.26.1.4.4 Machine Room Inspection Operation. When machine room inspection operation is provided, it shall conform to 2.26.1.4.1, and the transfer switch shall be (a) location in the machine room.

Variance Request No. 4a (ASME A17.1-2004, section 2.26.9.4)

2.26.9.4 Redundant devices used to satisfy 2.26.9.3 in the determination of the occurrence of a single ground, or the failure of any single magnetically operated switch, contactor or relay, or of any single solid state device, or any single device that limits the leveling or truck zone, or a software system failure, shall be checked prior to each start of the elevator from a landing, when on automatic operation. When a single ground or failure, as specified in 2.26.9.3, occurs, the car shall not be permitted to restart. Implementation of redundancy by a software system is permitted, provided that the removal of power from the driving machine motor and brake shall not be solely dependent on software controlled means.

Variance Request No. 4b (ASME A17.1-2004, section 2.26.9.6.1)

2.26.9.6.1 Two separate means shall be provided to independently inhibit the flow of alternating current through the solid state devices that connect the direct current power source to the alternating current driving motor. At least one of the means shall be an electromechanical relay.

Variance Request No. 5 (ASME A17.1-2004, section 8.4.10.1.1(a)(2)(b))

8.4.10.1.1 Earthquake Equipment (See Also Fig. 8.4.10.1.1)

(a) All traction elevators operating at a rated speed of 0.75 m/s (150 ft/min) or more and having counterweights located in the same hoistway shall be provided with the following:

(1) seismic zone 3 or greater: a minimum of one seismic switch per building

(2) seismic zone 2 or greater:

(a) a displacement switch for each elevator

(b) an identified momentary reset button or switch for each elevator, located in the control panel in the elevator machine room [see 8.4.10.1.3(i)]

E. Decision and Order

Applicant is hereby conditionally GRANTED Permanent Variance as specified below, and to the limited extent, as of the date the Board adopts this Proposed Decision, with respect to the section A specified number of TKE EOX MRL elevator(s), at the specified location, each shall conditionally hold permanent variance from the following subparts of ASME A17.1-2004, currently incorporated by reference into section 3141 of the Elevator Safety Orders:

- CarTop Railing: 2.14.1.7.1 (Limited to the extent necessary to permit the use of an inset cartop railing)
- Suspension Means: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, and 2.20.9.1 (Limited to the extent necessary to permit the use of the elastomeric-coated steel belts in lieu of circular steel suspension ropes)
- Inspection transfer switch: 2.26.1.4.4(a) (Limited to the extent necessary to permit the inspection transfer switch to reside at a location other than the machine room)
- Software Reliant Means to Remove Power: 2.26.9.4 (Limited to the extent necessary to permit the exclusive use of SIL-rated software systems as a means to remove power from the driving machine motor and brake)
- SIL-Rated Circuitry to Inhibit Current Flow: 2.26.9.6.1 (Limited to the extent necessary to permit the use of SIL-rated circuitry in place of an electromechanical relay to inhibit current flow to the drive motor)
- Seismic reset switch: 8.4.10.1.1(a)(2)(b) (Limited to the extent necessary to permit the seismic reset switch to reside at a location other than the machine room)

Inset Car Top Railing (Variance Request No. 1):

1.0 Any and all inset car top railings shall comply with the following:

1.1 Serviceable equipment shall be positioned so that mechanics and inspectors do not have to stand on or climb over the railings to perform adjustments, maintenance, repairs or inspections. The Applicant shall not permit trained elevator mechanics or elevator service personnel to stand or climb over the car top railing.

1.2 The distance that the railing can be inset shall be limited to not more than six inches (6”).

1.3 All exposed areas of the car top outside the car top railing where the distance from the railing to the edge of the car top exceeds two inches (2”), shall be beveled with metal, at an angle of not less than 75 degrees with the horizontal, from the mid or top rail to the outside of the car top, such that no person or object can stand, sit, kneel, rest, or be placed in the exposed areas.

1.4 The top surface of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4” diagonal red and white stripes.

1.5 The Applicant shall provide durable signs with lettering not less than 1/2 inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
STAY INSIDE RAILING

NO LEANING BEYOND RAILING
NO STEPPING ON, OR BEYOND, RAILING

1.6 The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing will be measured from the car top and not from the required bevel).

Suspension Means (Variance Request No. 2):

2.0 The elevator suspension system shall comply with the following:

2.1 The elastomeric coated steel belts (ECSBs) and their associated fastenings shall conform to the applicable requirements of ASME A17.1-2019, sections:

2.20.4.3 – Minimum Number of Suspension Members

2.20.3 – Factor of Safety

2.20.9 – Suspension Member Fastening

2.2 Additionally, ECSBs shall meet or exceed all requirements of ASME A17.6-2017, Standard for Elevator Suspension, Compensation, and Governor Systems, Part 3 Noncircular Elastomeric Coated Steel Suspension Members for Elevators.

2.3 The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection and testing of the ECSBs and fastenings and related monitoring and detection systems and criteria for ECSB replacement, and the Applicant shall make those procedures and criteria available to the Certified Competent Conveyance Mechanic (CCCM) at the location of the elevator, and to Cal/OSHA upon request.

2.4 ECSB mandatory replacement criteria shall include:

2.4.1. Any exposed wire, strand or cord;

2.4.2. Any wire, strand or cord breaks through the elastomeric coating;

2.4.3. Any evidence of rouging (steel tension element corrosion) on any part of the elastomeric coated steel suspension member;

2.4.4. Any deformation in the elastomeric suspension member such as, but not limited to, kinks or bends.

2.5 Traction drive sheaves shall have a minimum diameter of 100 mm and used in conjunction with Brugg Drahtseil AG belts, type 8000728993 or 125AL002. The maximum speed of ECSBs running on 100 mm drive sheaves shall be no greater than 6.1 m/s (1200 fpm).

2.6 If any one (1) ECSB needs replacement, the complete set of suspension members on the elevator shall be replaced. Exception: If a new suspension member is damaged during installation, and prior to any contemporaneously installed ECSB having been placed into service, it is permissible to replace the individual damaged suspension member. ECSBs that have been installed on another installation shall not be re used.

2.7 A traction loss detection means shall be provided that conforms to the requirements of ASME

A17.1-2019, section 2.20.8.1. The means shall be tested for correct function annually in accordance with ASME A17.1-2019, section 8.6.4.19.12.

2.8 A broken suspension member detection means shall be provided that conforms to the requirements of ASME A17.1-2019, section 2.20.8.2. The means shall be tested for correct function annually in accordance with ASME A17.1-2019, section 8.6.4.19.13(a).

2.9 An elevator controller integrated bend cycle monitoring system shall monitor actual ECSB bend cycles, by means of continuously counting, and storing in nonvolatile memory, the number of trips that the ECSB makes traveling, and thereby being bent, over the elevator sheaves. The bend cycle limit monitoring means shall automatically stop the car normally at the next available landing before the bend cycle correlated residual strength of any single ECSB member drops below (60%) sixty percent of full rated strength. The monitoring means shall prevent the car from restarting. Notwithstanding any less frequent periodic testing requirement per Addendum 2 (Cal/OSHA Circular Letter), the bend cycle monitoring system shall be tested semiannually in accordance with the procedures required per above Conditions 2.3 and 2.4.

2.10 The elevator crosshead data plate shall comply with the requirements of ASME A17.1-2019, section 2.20.2.1.

2.11 A suspension means data tag shall be provided that complies with the requirements of ASME A17.1-2019, section 2.20.2.2.

2.12 Comprehensive visual inspections of the entire length of each and all installed suspension members, in conformity with above Conditions 2.3 and 2.4 specified criteria, shall be conducted and documented every six (6) months of operation, and subsequent inspections annually by a CCCM.

2.13 The Applicant shall be subject to the requirements per hereto attached, and inhere incorporated, Addendum 1, “Suspension Means Replacement Reporting Condition.”

2.14 Records of all tests and inspections shall be maintenance records subject to ASME A17.12004, sections 8.6.1.2, and 8.6.1.4, respectively.

2.15 The subject elevators(s) shall be equipped with a TK Elevator Model 104DP001 Residual Strength Detection Device accepted by Cal/OSHA on May 4, 2021 or Cal/OSHA accepted equivalent device.

Control and Operating Circuits
Combined Software Redundant Devices with Software Removal of Power from Driving Motor and Brake (Variance Request No. 4a)
Removal of Power from Driving Motor Without Electromechanical Switches (Variance Request No. 4b)

3.0 The SIL rated circuitry used to provide device/circuit redundancy and to inhibit electrical current flow in accordance with ASME A17.12004, sections 2.26.9.4 and 2.26.9.6.1 shall comply with the following:

3.1 The SIL rated systems and related circuits shall consist of: the driving-machine motor control system shall consist of a TKE, model HVI-22 or HVI-44, High Voltage Inverter containing a Safe Torque Off printed circuit board assembly (STO). The STO shall be labeled or marked with a SIL rating (not less than SIL3), the name or mark of the certifying organization and

SIL certification number FS/71/220, followed by the applicable revision number (as in FS/71/220/23/1060).

3.2 The software system and related circuits shall be certified for compliance with the applicable requirements of ASME A17.1-2019 Section 2.26.9.3.2(b), 2.26.4.3.2, 2.26.9.6.1(b) and 2.26.9.4.

3.3 The access door or cover of the enclosures containing the SIL rated components shall be clearly labeled or tagged on their exterior with the statement:

Assembly contains SIL rated devices.
Refer to maintenance Control Program and wiring diagrams
prior to performing work.

3.4 Unique maintenance procedures or methods required for the inspection, testing, or replacement of the SIL rated circuits shall be developed and a copy maintained in the elevator machine/control room/space. The procedures or methods shall include clear color photographs of each SIL rated component, with notations identifying parts and locations.

3.5 Wiring diagrams that include part identification, SIL, and certification information shall be maintained in the elevator machine/control room/space.

3.6 A successful test of the SIL rated circuits shall be conducted initially and not less than annually in accordance with the testing procedure. The test shall demonstrate that SIL rated devices, safety functions, and related circuits operate as intended.

3.7 Any alterations to the SIL rated circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific provisions for the alteration of SIL rated devices, the alterations shall be made in conformance with ASME A17.1-2019, section 8.7.1.9.

3.8 Any replacement of the SIL rated circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific provisions for the replacement of SIL rated devices, the replacement shall be made in conformance with ASME A17.1-2019, section 8.6.3.14.

3.9 Any repairs to the SIL rated circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific provisions for the repair of SIL rated devices, the repairs shall be made in conformance with ASME A17.1-2019, section 8.6.2.6.

3.10 Any space containing SIL rated circuits shall be maintained within the temperature and humidity range specified by TKE. The temperature and humidity range shall be posted on each enclosure containing SIL rated software or circuits.

3.11 Field software changes to the SIL rated system are not permitted. Any changes to the SIL rated system's circuitry will require recertification and all necessary updates to the documentation and diagrams required by Conditions 3.4 and 3.5 above.

Inspection Transfer Switch and Seismic Reset Switch (Variance Request Nos. 3 and 5):

4.0 Inspection Transfer switch and Seismic Reset switch placement and enclosure shall comply with the following:

4.1 If the inspection transfer switch required by ASME A17.1-2004, section 2.26.1.4.4, does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the control/machinery room/space containing the elevator's control equipment in an enclosure secured by a lock openable by a Group 1 security key. The enclosure is to remain locked at all times when not in use.

4.2 If the seismic reset switch does not reside in the machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the control/machinery room/space containing the elevator's control equipment in an enclosure secured by a lock openable by a Group 1 security key. The enclosure is to remain locked at all times when not in use.

5.0 The elevator shall be serviced, maintained, adjusted, tested, and inspected only by CCCM having been trained, and competent, to perform those tasks on the TKE EOX MRL elevator system in accordance with written procedures and criteria, including as required per above Conditions 2.3, and 2.4.


6.0 Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and all applicable requirements met, including conditions of this permanent variance, prior to a Permit to Operate the elevator being issued. The elevator shall not be placed in full service prior to the Permit to Operate being issued by Cal/OSHA.

7.0 The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2, and 411.3.

8.0 This Decision and Order shall remain in effect unless duly modified or revoked upon application by Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026

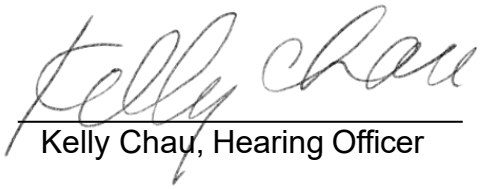

Kelly Chau, Hearing Officer

ADDENDUM 1

SUSPENSION MEANS REPLACEMENT REPORTING REQUIREMENTS

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, Attn: Engineering section, 2 MacArthur Place Suite 700, Santa Ana, CA 92707.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The Stateissued conveyance number, complete address, and Permanent Variance file number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, and certification expiration date of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which

case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2(a) above.

ADDENDUM 2

CIRCULAR LETTER E-10-04, October 6, 2010

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a nonfunctional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be nonfunctional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA Elevator Unit HQ

ADDENDUM 3

A. A Residual Strength Detection Device (RSDD) shall continuously monitor all Elastomeric Coated Steel Belt suspension members (ECSB), automatically stopping the car if the residual strength of any belt drops below 60%. The RSDD shall prevent the elevator from restarting after a normal stop at a landing. The RSDD shall device shall apply a form of electrical current and/or signal through the entire length of the steel tension elements of the ECSB and measure the current and/or signal on its return. The values measured shall be continuously compared to values that have been correlated to the remaining residual strength of the ECSB through testing. The required RSDD shall not rely upon giant magnetoresistance technology, or other magnetic measurement means, for residual strength detection or monitoring.

   The RSDD must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room or controller location. The removed RSDD must be replaced or returned to proper service within 30 days. If upon routine inspection, the RSDD device is found to be in a nonfunctional state, the date and findings are to be conspicuously documented in the elevator machine room or controller location.

   If upon inspection by Cal/OSHA, the RSDD is found to be nonfunctional or removed, and the required documentation is not in place, the elevator will be removed from service. If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

B. On or before November 21 2021, and thereafter, the above specified and documented RSDD shall be installed and operational on the subject elevator.

C. A successful functionality test of each RSDD shall be conducted once a year, and a copy of completed testing documentation conspicuously located in the machine room or within proximity of the controller.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-427	Millbrae MF Owner LLC	1100 El Camino Real Millbrae, CA	4

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-428	Thornton Affordable Housing, L.P.	37027 Post St. Fremont, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-429	Penn Valley Pacific Associates II, a California Limited Partnership	10528 Broken Oak Ct. Penn Valley, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision,

each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.

e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

a. The width and thickness in millimeters or inches;

b. The manufacturer's rated breaking strength in (kN) or (lbf);

c. The name of the person or organization that installed the flat coated steel belts;

d. The month and year the flat coated steel belts were installed;

e. The month and year the flat coated steel belts were first shortened;

f. The name or trademark of the manufacturer of the flat coated steel belts; and

g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

a. The number of belts;

b. The belt width and thickness in millimeters or inches; and

c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the

car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at

least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-430	Trillium Senior Apartments LP	678 E. Saint John St. San Jose, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-431	State & Laurel, LLC	2451 State St. San Diego, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-432	Burbank-Glendale-Pasadena Airport Authority	Hollywood Burbank Airport RPS Parking Garage 2627 N. Hollywood Way Burbank, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit

PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED

as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.

e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

a. The width and thickness in millimeters or inches;

b. The manufacturer's rated breaking strength in (kN) or (lbf);

c. The name of the person or organization that installed the flat coated steel belts;

d. The month and year the flat coated steel belts were installed;

e. The month and year the flat coated steel belts were first shortened;

f. The name or trademark of the manufacturer of the flat coated steel belts; and

g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

a. The number of belts;

b. The belt width and thickness in millimeters or inches; and

c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the

car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at

least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-433	Project Oak Hill, LLC	1001 Oak Hill Rd. Lafayette, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-434	San Jose Trimble Associates, A California Limited Partnership	110 Yoshino Way San Jose, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the

following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once

a year (the record of the annual test of the monitoring device shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-435	San Rafael Multifamily LLC	703 Third St. San Rafael, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-436	Soquel Pacific Associates, A Limited Partnership	2801 41st Ave. Soquel, CA	3

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the

following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once

a year (the record of the annual test of the monitoring device shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-437	Virginia College Associates LP	2449 Dwight Way Berkeley, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Medical Emergency Elevator Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-438	San Diego Unified School District	1425 Washington Place, Building A San Diego, CA	0

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact and Applicable Regulations

1. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

> (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:
>
> ...
>
> (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

2. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:
The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A.1 table shall have permanent variances from sections 3041, subdivision (e)(1)(C) and 3141.7, subdivision (b) subject of the following conditions:

1. All medical emergency service elevator(s) shall comply with the requirements of the 2019 California Building Code section 3002.4.1a:

   > The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

2. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.
3. Dimensional drawings and other information necessary to demonstrate compliance with the conditions of this permanent variance decision shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).
4. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing the elevators shall be provided a copy of this variance decision.
5. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and all applicable requirements met, including conditions of this permanent variance, prior to a Permit to Operate the elevator being issued. The elevator shall not be placed in service prior to the Permit to Operate being issued by Cal/OSHA.
6. Applicant shall notify its employees and their authorized representative, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.
7. This Decision and Order shall remain in effect unless duly modified or revoked upon application by Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with then in effect administrative procedures of the Board.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Medical Emergency Elevator Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-439	Savannah Four, LLC	460 W. Felicita Ave. Escondido, CA	0

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact and Applicable Regulations

1. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

   > (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:
   >
   > ...
   >
   > (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

   The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

   This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

2. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:
   The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

   The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A.1 table shall have permanent variances from sections 3041, subdivision (e)(1)(C) and 3141.7, subdivision (b) subject of the following conditions:

1. All medical emergency service elevator(s) shall comply with the requirements of the 2019 California Building Code section 3002.4.1a:

   > The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

2. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.
3. Dimensional drawings and other information necessary to demonstrate compliance with the conditions of this permanent variance decision shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).
4. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing the elevators shall be provided a copy of this variance decision.
5. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and all applicable requirements met, including conditions of this permanent variance, prior to a Permit to Operate the elevator being issued. The elevator shall not be placed in service prior to the Permit to Operate being issued by Cal/OSHA.
6. Applicant shall notify its employees and their authorized representative, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.
7. This Decision and Order shall remain in effect unless duly modified or revoked upon application by Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with then in effect administrative procedures of the Board.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Medical Emergency Elevator Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-441	304 E. Spruce St LP	310 E. Spruce Ave. Inglewood, CA	0

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact and Applicable Regulations

1. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

   > (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:
   >
   > ...
   >
   > (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

   The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

   This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

2. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:
   The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

   The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A.1 table shall have permanent variances from sections 3041, subdivision (e)(1)(C) and 3141.7, subdivision (b) subject of the following conditions:

1. All medical emergency service elevator(s) shall comply with the requirements of the 2019 California Building Code section 3002.4.1a:

   > The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

2. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.
3. Dimensional drawings and other information necessary to demonstrate compliance with the conditions of this permanent variance decision shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).
4. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing the elevators shall be provided a copy of this variance decision.
5. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and all applicable requirements met, including conditions of this permanent variance, prior to a Permit to Operate the elevator being issued. The elevator shall not be placed in service prior to the Permit to Operate being issued by Cal/OSHA.
6. Applicant shall notify its employees and their authorized representative, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.
7. This Decision and Order shall remain in effect unless duly modified or revoked upon application by Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with then in effect administrative procedures of the Board.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-443	Napa Vallejo Waste Management Authority	Administration Building 889 Devlin Rd. American Canyon, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the

following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once

a year (the record of the annual test of the monitoring device shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2O and/or Gen3 Peak with Variant Governor Rope and Sheaves & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-444	Los Angeles World Airports (LAWA)	LAX Terminal 5 Renovation & Reconstruction 500 World Way Los Angeles, CA	11

2. These proceedings are conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026, and via teleconference, by Occupational Safety and Health Standards Board ("Board") with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit, as a basis of proposed decision to be advanced to the Board for its consideration, in accordance with section 426.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Applicable Regulation

1. The Applicants request variance from some or all of the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the subject of those applications:

   a. Suspension Means: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4, and 2.20.9.5.4 (to permit the use of the Elastomeric Coated Steel Belts proposed by the Applicant in lieu of circular steel suspension ropes.);

   b. Cartop Railing: 2.14.1.7.1 (to permit the use of the car top railing system proposed by the Applicant, where the railing system is located inset from the elevator car top perimeter);

   c. Inspection transfer switch: 2.26.1.4.4(a) (to permit the inspection transfer switch to reside at a location other than the machine room);

   d. Seismic reset switch: 8.4.10.1.1(a)(2)(b) (to permit the seismic reset switch to reside at a location other than the machine room);

   e. Governor Rope Diameter: 2.18.5.1 (to permit the use of the governor rope proposed by the Applicant, where the rope has a diameter of 8 mm [0.315 in.]); Note: A variance from the section above is not required. However, the Board has included a variance from this code requirement in similar previous variances.

   f. Pitch Diameter: 2.18.7.4 (to permit the use of the speed governor system, proposed by the Applicant, where the rope sheave pitch diameter is less than what is required by the Elevator Safety Orders).

   g. Minimum Inside Car Platform Dimensions: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

D. Findings of Fact

1. The Board incorporates by reference the findings stated in:

   a. Items 3 through 5.c, 5.e, and 5.f of the "Findings of Fact" section of the Proposed Decision

adopted by the Board on February 19, 2009, in Permanent Variance No. 08-V-247;

b. Item D.3 of the Proposed Decision adopted by the Board on July 16, 2009, in Permanent Variance No. 09-V-042;

c. Item D.4 of the Proposed Decision adopted by the Board on September 16, 2010, in Permanent Variance No. 10-V-029;

d. Items D.4, D.5, and D.7 of the Proposed Decision adopted by the Board on July 18, 2013, in Permanent Variance No. 12-V-146; and

e. Items D.4 and D.5 of the Proposed Decision adopted by the Board on September 25, 2014, in Permanent Variance No. 14-V-170.

f. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for OSHSB File No. 22-V-302 regarding medical emergency car dimensions.

2. Regarding requested variance in governor sheave diameter, and governor rope diameter, in variance from section 3141, incorporated ASME A17.1-2004, sections 2.18.7.4 and 2.18.5.1, respectively, the Board incorporates by reference the following previous findings of record: Items 8 through 12 of the Proposed Decision adopted by the Board on December 13, 2018, in Permanent Variance No. 18-V-425, and further substantiating bases per therein cited Permanent Variance Decisions of the Board.
3. The installation contracts for elevators, the subject of the permanent variance application, were signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders ("ESO").
4. Cal/OSHA safety engineers, by way of written submissions to the record (Exhibit PD-3), and positions stated at hearing, are of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

E. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

F. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, Applicant shall have permanent variances from section 3141 and from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the subject of those applications:

- Suspension Means: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4, and 2.20.9.5.4 (To permit the use of the Elastomeric Coated Steel Belts proposed by the Applicant in lieu of circular steel suspension ropes.);

- Cartop Railing: 2.14.1.7.1 (To permit the use of the car top railing system proposed by the Applicant, where the railing system is located inset from the elevator car top perimeter);
- Inspection transfer switch: 2.26.1.4.4(a) (To permit the inspection transfer switch to reside at a location other than the machine room);
- Seismic reset switch: 8.4.10.1.1(a)(2)(b) (To permit the seismic reset switch to reside at a location other than the machine room);
- Governor Rope Diameter: 2.18.5.1 (To permit the use of the governor rope proposed by the Applicant, where the rope has a diameter of 8 mm [0.315 in.]); Note: A variance from the section above is not required. However, the Board has included a variance from this code requirement in similar previous variances.
- Pitch Diameter: 2.18.7.4 (To permit the use of the speed governor system, proposed by the Applicant, where the rope sheave pitch diameter is less than what is required by the Elevator Safety Orders).
- Minimum Inside Car Platform Dimensions: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

The variance shall be subject to, and limited by, the following additional conditions:

1. Each elevator subject to this variance shall comply with all applicable Group IV Elevator Safety Orders and with all ASME provisions made applicable by those Group IV Elevator Safety Orders, except those from which variances are granted, as set forth in the prefatory portion of this Decision and Order.
2. The suspension system shall comply with the following:
    a. The coated steel belt shall have a factor of safety at least equal to the factor of safety that ASME A17.1-2004, section 2.20.3, would require for wire ropes if the elevator were suspended by wire ropes rather than the coated steel belt.
    b. Steel-coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    f. The coated steel belts used shall be accepted by Cal/OSHA.
    g. The installation of belts and connections shall be in conformance with the manufacturer's specifications, which shall be provided to Cal/OSHA.

3. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, a copy of which is attached hereto as Addendum 1 and incorporated herein by this reference.
4. The Applicant shall not utilize each elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device, and criteria for belt replacement, and shall make those procedures and criteria available to Cal/OSHA upon request.
5. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:
    a. The width and thickness in millimeters or inches;
    b. The manufacturer's rated breaking strength in (kN) or (lbf);
    c. The name of the person who, or organization that, installed the flat coated steel belts;
    d. The month and year the flat coated steel belts were installed;
    e. The month and year the flat coated steel belts were first shortened;
    f. The name or trademark of the manufacturer of the flat coated steel belts;
    g. Lubrication information.
6. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:
    a. The number of belts,
    b. The belt width and thickness in millimeters or inches, and
    c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).
7. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
8. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a), does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. When the inspection and test control panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
10. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
11. If there is an inset car top railing:
    a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have

to climb on railings to perform adjustment, maintenance, repairs, or inspections. The Applicant shall not permit anyone to stand on or climb over the car top railing.

b. The distance that the car top railing may be inset from the car top perimeter shall be limited to no more than 6 inches.

c. All exposed areas of the car top outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or the car top outside the railing, shall be clearly marked. The markings shall consist of alternating four-inch diagonal red and white stripes.

e. The Applicant shall provide, on each inset railing, durable signs with lettering not less than ½ inch on a contrasting background. Each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top, and not from the required bevel).

11. The speed governor rope and sheaves shall comply with the following:

a. The governor shall be used in conjunction with a 8 mm (0.315 in.) diameter steel governor rope with 8-strand, regular lay construction.

b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

c. The governor sheaves shall have a pitch diameter of not less than 240 mm (9.45 in.).

12. Each elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen2(O) and/or Gen3 Peak elevator system the Applicant proposes to use, in accordance with the written procedures and criteria required by Condition No. 4 and the terms of this permanent variance.

13. All medical emergency service elevators shall comply with the following:

a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21- inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5 inch (127 mm) radius corners] in the horizontal, open position.

b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

c. Dimensional drawings and other information necessary to demonstrate compliance with

these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.
15. Cal/OSHA shall be notified when each elevator is ready for inspection. Each elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before each elevator is placed in service.
16. The Applicant shall be subject to the suspension means replacement reporting condition stated in Addendum 2; that condition is incorporated herein by this reference.
17. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way that the Applicant was required to notify them of the application for permanent variance, per sections 411.2 and 411.3.
18. This Decision and Order shall remain in effect unless duly modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 500 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-445	Essex Portfolio L.P.	7 S. Linden Ave. South San Francisco, CA	6

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; and Mark Wickens and Jose Ceja appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

A reduced diameter governor rope of equivalent construction and material to that required by ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1-2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and

conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room/space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.

11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a “Permit to Operate” issued before the elevator is placed in service.

12. The Applicant shall comply with suspension means replacement reporting condition per hereby incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026



Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-445	1	7	11556	200	3500
26-V-445	2	7	11556	200	3500
26-V-445	3	7	11556	200	3500
26-V-445	4	7	11556	200	3500
26-V-445	5	7	11556	200	3500
26-V-445	6	7	11556	200	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding: KONE Monospace 500 Elevators with Retractable Platform Guard & MES (Group IV)	Permanent Variance No.: 26-V-446 PROPOSED DECISION Hearing Date: September 23, 2026 Location: Zoom

A. Subject Matter

1. The applicants ("Applicant") below have applied for permanent variance from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations.[1]

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Elevators
26-V-446	Center for the Art of Translation	554-556 Commercial St. San Francisco, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026, via videoconference, by the Board, with Hearing Officer, Kelly Chau, both presiding and hearing the matter on its merit in accordance with section 426.

2. At the hearing, Fuei Saetern, with KONE, Inc., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

[1] Unless otherwise noted, references are to the California Code of Regulations, title 8.

Exhibit Number	Description of Exhibit
PD-1	Application(s) for Permanent Variance per section A.1 table
PD-2	OSHSB Notice of Hearing
PD-3	Cal/OSHA Review of Variance Application
PD-4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.

2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.

3. Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.

4. In relevant part, ASME A17.1-2004, section 2.20.4 states: 2.20.4 Minimum Number and Diameter of Suspension Ropes …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.

5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.

6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.

7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).

8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in

variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.

9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part: 2.18.5.1 Material and Factor of Safety. … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…

10. The Board takes notice of section 3141.7, subpart (a)(10): 2A reduced diameter governor rope of equivalent construction and material to that required by ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under

conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1-2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope 3f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope.

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from provisions of section 3141 [ASME A17.1-2004, Section 2.15.9.2(a) and 2.4.1.5] concerning the platform guard (Apron) and car mounted equipment striking the pit, respectively, of the KONE Inc. Monospace 500 Elevator with Retractable Platform Guard, in the quantity, at the location, specified per the above section A.1 table.

19. Applicant proposes to install a two-section retractable platform guard (apron) consisting of a stationary upper section guard plate and a moveable lower section guard plate. To monitor the retractable mechanism, an electrical switching system will be provided to monitor for malfunction.

20. Section 3141 [ASME A17.1-2004, Section 2.15.9.2] states, in part:

2.15.9.2 The guard plate shall have a straight vertical face, extending below the floor surface of the platform, conforming to one of the following:

(a) where the elevator is required to conform to 2.19.2.2(b) the depth of the truck zone, where provided, plus 75 mm (3 in.), but in no case less than 1,220 mm (48 in.).

An intent of this code section is to guard a hazardous opening to the hoistway if the elevator car is intentionally or unintentionally positioned above the landing zone, by providing a guard that extends below the car platform to obstruct the opening.

21. Section 3141 [ASME A17.1-2004, Section 2.4.1.5] states, in part:

2.4.1.5 When the car is resting on its fully compressed buffers or bumpers, no part of the car, or any equipment attached thereto or equipment traveling with the car, shall strike any part of the pit or any equipment mounted therein.

An intent of this code section is to prevent any equipment attached to the elevator car from striking any part of the pit. This could damage the elevator equipment, which may result in unsafe operation or injury.

22. Per Cal/OSHA's Review of Application (Exhibit PD-3) Applicant's proposed platform guard is similar in all material respects to installations for which a permanent variance previously has been granted. (e.g., 18-V-010M1).

23. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

> (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:
> …
>
> (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

24. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

> The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

25. Cal/OSHA safety engineers, and Cal/OSHA, by way of written submission to the record (Exhibit PD-3), and positions stated at hearing, are of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

The application for permanent variance, in the matter of OSHSB Variance No. 26-V-446, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the conditions below.

Variance No. 26-V-446, is also conditionally GRANTED issuing the Applicant permanent variance from section 3141 [ASME A17.1-2004, Section 2.4.1.5 (only to the extent necessary to permit the use of a two-section retractable platform guard (apron) where the depth of the pit is not sufficient enough to prevent the platform guard from contacting the floor when the car is resting on its fully compressed buffers or bumpers), and 2.15.9.2 (only to the extent necessary to permit the two-section retractable platform guard (apron) to contact the pit floor), for the specific conveyances, at the specific variance location, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter

and the roping ratio shall be two to one (2:1).

2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.

3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.

4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).

5. A rope inspection log shall be maintained and available in the elevator controller room/space at all times.

6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.

7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.

8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.

10. In lieu of the straight vertical face (one-piece) platform guards (aprons) required by section 3141 [ASME A17.1-2004, Section 2.15.9.2], a two-section retractable platform guard consisting of a stationary, upper-section guard plate and a moveable, lower- section guard plate shall be installed and conformed to the following:

    a. The stationary, upper-section guard plate shall have a straight vertical face, extending below the floor surface of the platform; the height shall be not less than 920 mm (36.2 in).

    b. The movable, lower-section guard plate shall:

        (i) Comply with ASME A17.1-2004, Section 2.15.9.3;

        (ii) Be provided with a rubber bumper at the center of the bottom edge of the plate to absorb the impact when the toe guard strikes the concrete pit floor;

        (iii) Be provided with an electrical switch that indicates to the control system that the retractable platform guard is in its extended position (when car is away from the

bottom landing), and be provided with a second electrical switch that indicates to the control system that the moveable lower section is in its retracted position (when the car is at the bottom landing), thereby overriding the first switch. Failure of either of these electrical switches or of the mechanical parts that activate these electrical switches shall cause the controller to remove power from the driving machine and brake.

c. The two-section retractable platform guard shall be provided with smooth metal guard plates of not less than 1.5 mm (0.059 in) thick steel, or material of equivalent strength and stiffness, adequately reinforced and braced to the car platform and conforming to ASME A17.1-2004, sections 2.15.9.1 and 2.15.9.4.

d. The overall height of the two-section retractable platform guard shall be not less than 1220 mm (48 in) when the moveable lower section is in the fully extended (deployed) position.

e. The elevator rated speed shall be equal to or less than 200 feet per minute.

11. All medical emergency service elevator(s) shall comply with the following:

a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

12. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

13. Cal/OSHA shall be notified when the elevator is ready for inspection to confirm conformity with above specified conditions and limitations. No elevator shall be placed in service prior to it being inspected and issued a Permit to Operate by Cal/OSHA.

14. The Applicant shall be subject to the suspension means replacement reporting condition stated in Appendix 2; that condition is incorporated herein by this reference.

15. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way that the Applicant was required to notify them of the application for

permanent variance per sections 411.2 and 411.3.

16. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA or by the Board on its own motion, in accordance with the Board's procedural regulations.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

Dated: 9/30/2026

Kelly Chau, Hearing Officer

APPENDIX 1

Elevator ID	Rated Capacity (lbs.)	Minimum Number of Suspension Ropes	Maximum Rated Elevator Speed	Maximum Suspended Load (lbs.) [plus 5%]
1	3,500	7	150	12,247

APPENDIX 2

Suspension Means - Replacement Reporting Condition.

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, Section 8.6.3 involving the suspension means or suspension means fastenings. Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): DOSH Elevator Unit, 2 MacArthur Pl., Suite 700, Santa Ana, CA 92707, Attn: Engineering Section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and OSHSB file number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, Section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, Section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other

engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 500 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-447	1101 Sutter Affordable, LP	1111 Sutter St. San Francisco, CA	3

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1-2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room/space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-447	1	6	8362	500	3500
26-V-447	2	6	8362	500	3500
26-V-447	3	6	8362	500	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 500 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-448	Pac Avenue, L.P.	3701 Pacific Ave. Livermore, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1-2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room/space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-448	1	7	12247	150	3500
26-V-448	2	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-449	MP Lazuli Landing Associates, L.P.	33435 Mission Blvd. Union City, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-449	1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-450	Second Harvest of Silicon Valley	4553 N First St. San Jose, CA	2

2. The safety order requirements are set out within section 3143 incorporated ASME A17.1-2004, sections 2.18.5.1 and 2.20.4.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference, by the Occupational Safety and Health Standards Board ("Board"), with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit in accordance with section 426.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to

activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).

2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.

3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.

4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).

5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.

6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a “Permit to Operate” issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby incorporated Decision and Order Appendix 2.
13. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.
14. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-450	A	4	6998	150	2500
26-V-450	B	6	10497	150	2500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-451	Mercy Housing California 114, L.P.	1616 Cypress Ln. Paradise, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-451	1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-452	Mercy Housing California 114, L.P.	1620 Cypress Ln. Paradise, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 10, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-452	1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-453	Santa Cruz City Schools	313 Swift St. Santa Cruz, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-453	1	7	12247	150	3500
26-V-453	2	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-454	BSL Centinela, LLC	2512 S. Centinela Ave. Los Angeles, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-455	The Harker School	4300 Bucknall Rd. San Jose, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-455	1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-456	Grays Crossing Hospitality LLC	Mountain Scout Hotel 10162 Edwin Way Truckee, CA	3

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

A reduced diameter governor rope of equivalent construction and material to that required by ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and

conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.

11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a “Permit to Operate” issued before the elevator is placed in service.

12. The Applicant shall comply with suspension means replacement reporting condition per hereby incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-456	1	7	12247	150	3500
26-V-456	2	7	12247	150	3500
26-V-456	3	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 500 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-457	Berryessa Affordable Housing, L.P.	825 Berryessa Station Way San Jose, CA	3

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

A reduced diameter governor rope of equivalent construction and material to that required by ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1-2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and

conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room/space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.

11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a “Permit to Operate” issued before the elevator is placed in service.

12. The Applicant shall comply with suspension means replacement reporting condition per hereby incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-457	1	7	11556	200	3500
26-V-457	2	7	11556	200	3500
26-V-457	3	8	13207	200	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 500 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-458	Visionary Home Builders of California, Inc.	622 E. Lindsay St. Stockton, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1-2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room/space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-458	1	7	12247	150	3500
26-V-458	2	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 500 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-459	SPG-AMLI Brea Residential, LLC	1650 Brea Mall Brea, CA	3

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1-2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room/space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-459	1	8	13207	200	3500
26-V-459	2	7	11556	200	3500
26-V-459	3	7	11556	200	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 500 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-460	Salk Avenue Holdings LLC	2165 Salk Ave. Carlsbad, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1-2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room/space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-460	2	8	13207	200	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Schindler Model 3300 Elevators, w/variant Gov. Ropes and Sheaves (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-461	CCFB Real Estate, Inc.	4010 E. Amendola Dr. Fresno, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Pete Cuellar, with SCHINDLER ELEVATOR CORPORATION, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize Schindler model 3300 MRL elevator cars, in the quantity, at the locations specified in Jurisdictional and Procedural Matters, section 1.
2. The installation contract for these elevators was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. The Schindler model 3300 MRL elevator cars are not supported by circular steel wire ropes, as required by the Elevator Safety Orders. They utilize non circular elastomeric coated steel belts and specialized suspension means fastenings.
4. No machine room is provided, preventing the inspection transfer switch from being located in the elevator machine room. The lack of machine room also prevents the seismic reset switch from being located in the elevator machine room.
5. Applicant proposes to relocate the inspection transfer switch and seismic reset switch in an alternative enclosure.
6. Due to the use of a 6 mm (0.25 in.) governor rope with 6-strand construction, the provided governor sheave pitch diameter is less than that required by the Elevator Safety Orders.
7. The driving machine and governor are positioned in the hoistway and restrict the required overhead clearance to the elevator car top.
8. Applicant proposes to insert the car top railings at the perimeter of the car top.
9. Applicant intends to use an elevator control system, model CO NX100NA or CO NX300NA, with a standalone, solid state motor control drive system that includes devices and circuits having a Safety Integrity Level (SIL) rating to execute specific elevator safety functions.

D. Relevant Safety Order Provisions

Applicant seeks a permanent variance from section 3141 [ASME A17.1-2004, sections 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4, 2.20.9.5.4, 2.26.1.4.4(a), 8.4.10.1.1(a)(2)(b), 2.14.1.7.1, 2.18.7.4, and 2.26.9.6.1] of the Elevator Safety Orders, with respect to the suspension ropes and connections, inspection transfer switch relocation, seismic reset switch relocation, the location and construction of car-top railings, governor-sheave diameter, and means of removing power from the driving machine motor for one (1) Schindler model 3300 MRL elevator.

The relevant language of those sections are below.

1. Suspension Means

- Section 3141 [ASME A17.1-2004, section 2.20.1, Suspension Means] states in part:
    - Elevator cars shall be suspended by steel wire ropes attached to the car frame or passing around sheaves attached to the car frame specified in 2.15.1. Ropes that have previously been installed and used on another installation shall not be reused. Only iron (low carbon steel) or steel wire ropes, having the commercial classification “Elevator Wire Rope,” or wire rope specifically constructed for elevator use, shall be used for the suspension of elevator cars and for the suspension of counterweights. The wire material for ropes shall be manufactured by the open hearth or electric furnace process, or their equivalent.

- Section 3141 [ASME A17.1-2004, section 2.20.2.1(b), On Crosshead Data Plate] states in part:
    - The crosshead data plate required by 2.16.3 shall bear the following wire rope data:
        - (b) the diameter in millimeters (mm) or inches (in.)

- Section 3141 [ASME A17.1-2004, section 2.20.2.2(a) and (f) On Rope Data Tag] states in part:
    - A metal data tag shall be securely attached to one of the wire rope fastenings. This data tag shall bear the following wire rope data:
    - (a) the diameter in millimeters (mm) or inches (in.)
    - […]
    - (f) whether the ropes were non preformed or preformed

- Section 3141 [ASME A17.1-2004, section 2.20.3, Factor of Safety] states:
    - The factor of safety of the suspension wire ropes shall be not less than shown in Table 2.20.3. Figure 8.2.7 gives the minimum factor of safety for intermediate rope speeds. The factor of safety shall be based on the actual rope speed corresponding to the rated speed of the car.
    - The factor of safety shall be calculated by the following formula:

$$f = \frac{(S \times N)}{W}$$

- where:
    - N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.
    - S = manufacturer's rated breaking strength of one rope
    - W = maximum static load imposed on all car ropes with the car and its rated load at

any position in the hoistway

- Section 3141 [ASME A17.1-2004, section 2.20.4, Minimum Number and Diameter of Suspension Ropes] states:
  - The minimum number of hoisting ropes used shall be three for traction elevators and two for drum type elevators.
  - Where a car counterweight is used, the number of counterweight ropes used shall be not less than two.
  - The term “diameter,” where used in reference to ropes, shall refer to the nominal diameter as given by the rope manufacturer.
  - The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.

- Section 3141 [ASME A17.1-2004, section 2.20.9.3.4] states:
  - Cast or forged steel rope sockets, shackle rods, and their connections shall be made of unwelded steel, having an elongation of not less than 20% in a gauge length of 50 mm (2 in.), when measured in accordance with ASTM E 8, and conforming to ASTM A 668, Class B for forged steel, and ASTM A 27, Grade 60/30 for cast steel, and shall be stress relieved. Steels of greater strength shall be permitted, provided they have an elongation of not less than 20% in a length of 50 mm (2 in.).

- Section 3141 [ASME A17.1-2004, section 2.20.9.5.4] states:
  - When the rope has been seated in the wedge socket by the load on the rope, the wedge shall be visible, and at least two wire rope retaining clips shall be provided to attach the termination side to the load carrying side of the rope (see Fig. 2.20.9.5). The first clip shall be placed a maximum of 4 times the rope diameter above the socket, and the second clip shall be located within 8 times the rope diameter above the first clip. The purpose of the two clips is to retain the wedge and prevent the rope from slipping in the socket should the load on the rope be removed for any reason. The clips shall be designed and installed so that they do not distort or damage the rope in any manner.

2. Requested Transfer Switch Placement Variance

- As it pertains to installation of the requisite transfer switch within a “machine room” location incompatible with machine-room-less design of the Schindler Model 3300 elevator, the Applicant presently seeks permanent variance from the following Elevator Safety Order incorporated ASME Code A17.1-2004, subsection:
  - Subsection 2.26.1.4.4(a)--Transfer Switch Placement in Machine Room

- Section 3141[ASME A17.1-2004, section 2.26.1.4.4(a), Machine Room Inspection Operation] states:
- When machine room inspection operation is provided, it shall conform to 2.26.1.4.1, and the transfer switch shall be

- (a) located in the machine room[.]

3. Requested Seismic Reset Switch Placement Variance

- As it pertains to installation of the requisite seismic reset switch within a “machine room” location incompatible with machine-room-less design of the Schindler Model 3300 elevator, the Applicant presently seeks permanent variance from the following Elevator Safety Order incorporated ASME Code subsection:
  - Subsection 8.4.10.1.1(a)(2)(b)--Seismic Reset Switch Placement in Machine Room

- Section 3141[ASME A17.1-2004, section 8.4.10.1.1(a)(2)(b), Earthquake Equipment] states:
  - (a) All traction elevators operating at a rated speed of 0.75 m/s (150 ft/min) or more and having counterweights located in the same hoistway shall be provided with the following:
  - (1) seismic zone 3 or greater: a minimum of one seismic switch per building
  - (2) seismic zone 2 or greater:
    - (a) a displacement switch for each elevator
    - (b) an identified momentary reset button or switch for each elevator, located in the control panel in the elevator machine room

4. Requested Car Top Railing Inset Variance

- As it pertains to top of car railing placement requiring space occupied by upper hoistway mounted elevator machinery characteristic of the Schindler Model 3300 elevator, the Applicant presently seeks permanent variance from the following Elevator Safety Order incorporated ASME Code A17.1-2004, section:
  - Section 2.14.1.7.1—Top of Car Perimeter Railing Placement

- Section 3141[ASME A17.1-2004, section 2.14.1.7.1] states:
  - A standard railing conforming to 2.10.2 shall be provided on the outside perimeter of the car top on all sides where the perpendicular distance between the edges of the car top and the adjacent hoistway enclosure exceeds 300 mm (12 in.) horizontal clearance.

5. Pitch Diameter of Governor Sheaves

- Section 3141 [ASME A17.1-2004, Section 2.18.7.4] states:
  - “The pitch diameter of governor sheaves and governor tension sheaves shall be not less than the product of the diameter of the rope and the applicable multiplier listed in Table 2.18.7.4, based on the rated speed and the number of strands in the rope.”

Table 2.18.7.4 Multiplier for Determining Governor Sheave Pitch Diameter
[from ASME A17.1-2004]

Rated Speed m/s (ft./min)	**Number of Strands**	**Multiplier**
1.00 or less (200 or less)	6	42
1.00 or less (200 or less)	8	30
Over 1.0 (over 200)	6	46
Over 1.0 (over 200)	8	32

6. SIL Rated System to Inhibit Current Flow to AC Drive Motor
    - Section 3141[ASME A17.1-2004, section 2.26.9.6.1] states:
        - Two separate means shall be provided to independently inhibit the flow of alternating current through the solid state devices that connect the direct current power source to the alternating current driving motor. At least one of the means shall be an electromechanical relay.

E. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicant's proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Order from which variance is being sought.

F. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above table in Jurisdictional and Procedural Matters shall have permanent variances from sections 3041, subdivision (e)(1)(C) and 3141.7, subdivision (b) subject of the following conditions:

Elevator Safety Orders:

- Suspension Means: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4, and 2.20.9.5.4 (Only to the extent necessary to permit the use of the Elastomeric coated Steel Belts proposed by the Applicant, in lieu of circular steel suspension ropes.);
- Inspection transfer switch: 2.26.1.4.4(a) (Only to the extent necessary to permit the inspection transfer switch to reside at a location other than the machine room);

- Seismic reset switch: 8.4.10.1.1(a)(2)(b) (Only to the extent necessary to permit the seismic reset switch to reside at a location other than the machine room. room);
- Car Top Railing: 2.14.1.7.1 (Only to the extent necessary to permit the use of the car top railing system proposed by the Applicant, where the railing system is located inset from the elevator car top perimeter);
- Governor Rope and Sheave: The Applicant shall conditionally hold permanent variance from certain requirements of section 3141, incorporated section of ASME A17.1-2004, to the limited extent variance is necessary to allow for the below specified governor rope and governor sheave parameters: section 2.18.7.4.
- Means of Removing Power: 2.26.9.6.1 (Only to the extent necessary to permit the use of SIL rated devices and circuits as a means to remove power from the AC driving motor, where the redundant monitoring of electrical protective devices is required by the Elevator Safety Orders).

Conditions:

1. The elevator suspension system shall comply to the following:
    a. The suspension traction media (STM) members and their associated fastenings shall conform to the applicable requirements of ASME A17.1-2013, sections:
        - 2.20.4.3 - Minimum Number of Suspension Members
        - 2.20.3 - Factor of Safety
        - 2.20.9 - Suspension Member Fastening

    b. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection and testing of the STM members, fastenings, related monitoring and detection systems, and criteria for STM replacement. The Applicant shall make those procedures and criteria available to the Certified Competent Conveyance Mechanic (CCCM) at the location of the elevator, and to the Cal/OSHA upon request.
        - STM member mandatory replacement criteria shall include:
            i. Any exposed wire, strand or cord;
            ii. Any wire, strand or cord breaks through the elastomeric coating;
            iii. Any evidence of rouging (steel tension element corrosion) on any part of the elastomeric coated steel suspension member;
            iv. Any deformation in the elastomeric suspension member such as, but not limited to, kinks or bends;

    c. Traction drive sheaves must have a minimum diameter of 72 mm. The maximum speed of STM members running on 72 mm, 87 mm and 125 mm drive sheaves shall be no greater than 2.5 m/s, 6.0 m/s and 8.0 m/s respectively.

    d. If any one STM member needs replacement, the complete set of suspension members on the elevator shall be replaced. Exception: if a new suspension member is damaged during

installation, and prior to any contemporaneously installed STM having been placed into service, it is permissible to replace the individual damaged suspension member. STM members that have been installed on another installation shall not be re used.

e. A traction loss detection means shall be provided that conforms to the requirements of ASME A17.1-2013, section 2.20.8.1. The means shall be tested for correct function annually in accordance with ASME A17.1-2013, section 8.6.4.19.12.

f. A broken suspension member detection means shall be provided that conforms to the requirements of ASME A17.1-2013, section 2.20.8.2. The means shall be tested for correct function annually in accordance with ASME A17.1-2013, section 8.6.4.19.13(a).

g. An elevator controller integrated bend cycle monitoring system shall monitor actual STM bend cycles, by means of continuously counting, and storing in nonvolatile memory, the number of trips that the STM makes traveling, and thereby being bent, over the elevator sheaves. The bend cycle limit monitoring means shall automatically stop the car normally at the next available landing before the bend cycle correlated residual strength of any single STM member drops below 80 percent of full rated strength. The monitoring means shall prevent the car from restarting. The bend cycle monitoring system shall be tested annually in accordance with the procedures required by condition 1b above.

h. The elevator shall be provided with a device to monitor the remaining residual strength of each STM member. The device shall conform to the requirements of Cal/OSHA Circular Letter E-10-04, a copy of which is attached hereto as Exhibit 1 and incorporated herein by reference.

i. The elevator crosshead data plate shall comply with the requirements of ASME A17.1 2013, section 2.20.2.1.

j. A suspension means data tag shall be provided that complies with the requirements of ASME A17.1 2013, section 2.20.2.2.

k. Comprehensive visual inspections of the entire length of each and all installed suspension members, to the criteria developed in condition 1b, shall be conducted and documented every six months by a CCCM.

l. The Applicant shall be subject to the requirements set out in Exhibit 2 of this Decision and Order, “Suspension Means Replacement Reporting Condition,” Incorporated herein by this reference.

m. Records of all tests and inspections shall be maintenance records subject to ASME A17.1 2004, sections 8.6.1.2 and 8.6.1.4, respectively.

2. If the inspection transfer switch required by ASME A17.1-2004, section 2.26.1.4.4 does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the control/machinery room/space containing the elevator's control equipment in an enclosure secured by a lock openable by a Group 1 security key. The enclosure is to remain locked at all times when not in use.

3. If the seismic reset switch does not reside in the machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the control/machinery room/space containing the elevator's control equipment in an enclosure secured by a lock openable by a Group 1 security key. The enclosure is to remain locked at all times when not in use.

4. If there is an inset car top railing:

    a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on the railings to perform adjustments, maintenance, repairs or inspections. The Applicant shall not permit anyone to stand or climb over the car top railing.

    b. The distance that the railing can be inset shall be limited to not more than 6 inches.

    c. All exposed areas of the car top outside the car top railing where the distance from the railing to the edge of the car top exceeds 2 inches, shall be beveled with metal, at an angle of not less than 75 degrees with the horizontal, from the mid or top rail to the outside of the car top, such that no person or object can stand, sit, kneel, rest, or be placed in the exposed areas.

    d. The top of the beveled area and/or car top outside the railing shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

    e. The applicant shall provide durable signs with lettering not less than 1/2 inch on a contrasting background on each inset railing. Each sign shall state:

CAUTION
STAY INSIDE RAILING
NO LEANING BEYOND RAILING
NO STEPPING ON, OR BEYOND, RAILING

    f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing will be measured from the car top and not from the required bevel).

5. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a steel 6 mm (0.25 in.) diameter governor rope with 6 strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 200 mm (7.87 in.).

6. The SIL rated devices and circuits used to inhibit electrical current flow in accordance with ASME A17.1-2004, section 2.26.9.6.1 shall comply with the following:

    a. The SIL-rated devices and circuits shall consist of a Variodyn SIL3 rated Regenerative, Variable Voltage Variable Frequency (VVVF) motor drive unit, model VAF013, VAF023, or VAF043 labeled or marked with the SIL rating (not less than SIL 3), the name or mark of the certifying organization, and the SIL certification number (968/FSP 1556.00), and followed by the applicable revision number (as in 968/FSP 1556.00/19).

    b. The devices and circuits shall be certified for compliance with the applicable requirements of ASME A17.1-2013, section 2.26.4.3.2.

    c. The access door or cover of the enclosures containing the SIL rated components shall be

clearly labeled or tagged on their exterior with the statement:

Assembly contains SIL rated devices.
Refer to Maintenance Control Program and
wiring diagrams prior to performing work.

d. Unique maintenance procedures or methods required for the inspection, testing, or replacement of the SIL rated circuits shall be developed and a copy maintained in the elevator machine/control room/space. The procedures or methods shall include clear color photographs of each SIL rated component, with notations identifying parts and locations.

e. Wiring diagrams that include part identification, SIL, and certification information shall be maintained in the elevator machine/control room/space.

f. A successful test of the SIL rated devices and circuits shall be conducted initially and not less than annually in accordance with the testing procedure. The test shall demonstrate that SIL rated devices, safety functions, and related circuits operate as intended.

g. Any alterations to the SIL rated devices and circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific provisions for the alteration of SIL rated devices, the alterations shall be made in conformance with ASME A17.1-2013, section 8.7.1.9.

h. Any replacement of the SIL rated devices and circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific provisions for the replacement of SIL rated devices, the replacement shall be made in conformance with ASME A17.1-2013, section 8.6.3.14.

i. Any repairs to the SIL rated devices and circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific provisions for the repair of SIL rated devices, the repairs shall be made in conformance with ASME A17.1-2013, section 8.6.2.6.

j. Any space containing SIL rated devices and circuits shall be maintained within the temperature and humidity range specified by Schindler Elevator Corporation. The temperature and humidity range shall be posted on each enclosure containing SIL rated devices and circuits.

k. Field changes to the SIL rated system are not permitted. Any changes to the SIL rated system's devices and circuitry will require recertification and all necessary updates to the documentation and diagrams required by conditions d. and e. above.

7. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and all applicable requirements met, including conditions of this permanent variance, prior to a Permit to Operate the elevator being issued. The elevator shall not be placed in service prior to the Permit to Operate being issued by Cal/OSHA.

8. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way that the Applicant was required to notify them of the docketed application for permanent variance per sections 411.2 and 411.3.

9. This Decision and Order shall remain in effect unless duly modified or revoked upon application by Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 24, 2026



Kelly Chau, Hearing Officer

EXHIBIT 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA Elevator Unit HQS

EXHIBIT 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings. Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): CAL/OSHA Elevator Unit, 2 MacArthur Pl., Suite 700, Santa Ana, CA 92707, Attn: Engineering Section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance file number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME Al7.l-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-462	2K'S REALTY LLC	3050 Madison St. Carlsbad, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-462	1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Arrow Lift Symmetry VPL/VLC SL/SLH-168 Vertical Platform Lift

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-463	Paradise Marin LLC	5842 Paradise Dr. Corte Madera, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Patrick Austin, with Arrow Lift of California, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. The Applicant proposes to install 1 vertical platform (wheelchair) lift at a location having the address of:

5842 Paradise Dr.
Corte Madera, CA

2. The subject vertical lift is proposed to be a Arrow Lift Symmetry VPL/VLC SL/SLH-168 Vertical Platform Lift, with a vertical travel range of approximately 168 inches. That range of travel exceeds the 12 foot maximum vertical rise allowed by ASME A18.1-2003, section 2.7.1—the State of California standard in force at the time of this Decision.
3. The Cal/OSHA evaluation in this matter states that the more recent consensus code ASME A18.1-2005 allows for vertical platform lifts to have a travel not exceeding 14 feet (168 in.).
4. Permanent variances regarding the extended travel of vertical platform lifts, of similar configuration to that of the subject proposed model, have been previously granted, absent subsequent harm attributable to such variance being reported by Cal/OSHA. (E.g. Permanent Variance Nos. 13-V-260, 15-V-097, 17-V-270, 18-V-278, 19-V-256).
5. With respect to the equivalence or superiority of safety, conditions and limitations of the Decision and Order are in material conformity with findings and conditions of prior Board permanent variance decisions, including the above cited.
6. Per its written Review of Application for Permanent Variance, Exhibit PD-3, it is the informed opinion of Cal/OSHA that equivalent safety (at minimum) will be achieved upon grant of presently requested permanent variance, subject to conditions and limitations incorporated into the below Decision and Order.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

The Application for Permanent Variance of Paradise Marin LLC, Permanent Variance No. 26-V-463, is conditionally GRANTED to the limited extent, upon the Board's adoption of this Proposed Decision shall have permanent variance from sections 3142(a) and 3142.1 incorporated ASME A18.1-2003, section 2.7.1, inasmuch as it restricts the vertical rise of a wheelchair lift to a maximum of 12 feet, with respect to 1 Arrow Lift Symmetry VPL/VLC SL/SLH-168 Vertical Platform Lift, to be located at:

5842 Paradise Dr.
Corte Madera, CA

The above referenced vertical platform lift shall be subject to the following further conditions and limitations:

1. This lift may travel up to 168 inches, unless the manufacturer's instructions provide for a lesser vertical travel limit, or lesser total elevation change, in which case, travel shall be limited to the lesser limit or elevation change.
2. The wheelchair lift shall be installed and operated in accordance with the manufacturer's instructions, unless the provisions of this variance or applicable provisions of the law provide otherwise.
3. Durable signs with lettering not less than 5/16 inch on a contrasting background shall be permanently and conspicuously posted inside the car and at all landings indicating that the lift is for the exclusive use of persons with physical impairments and that the lift is not to be used to transport material or equipment. The use of the lift shall be limited in accordance with these signs.
4. A maintenance contract shall be executed between the owner/operator and a Certified Qualified Conveyance Company (CQCC). The contract shall stipulate that the routine preventive maintenance required by section 3094.5(a)(1) shall be performed at least quarterly and shall include but not be limited to:
    a. Platform driving means examination;
    b. Platform examination;
    c. Suspension means examination;
    d. Platform alignment;
    e. Vibration examination;
    f. Door/gate electrical; and
    g. Mechanical lock examination.
5. The lift shall be tested annually for proper operation under rated load conditions. Cal/OSHA Elevator Unit District Office shall be provided written notification in advance of the test, and the test shall include a check of car or platform safety device.
6. The lift shall be shut down immediately if the lift experiences unusual noise and vibration, and the Applicant shall notify the CQCC immediately. The lift shall only be restarted by the CQCC.
7. The Applicant shall notify the CQCC if the lift shuts down for any reason. The lift shall only be restarted by the CQCC.

8. Service logs including, but not limited to, the device shutdown(s) shall be kept in the maintenance office and shall be available to Cal/OSHA. The shutdown information shall contain the date of the shutdown, cause of the shutdown, and the action taken to correct the shutdown.
9. The Applicant shall provide training on the safe operation of the lift in accordance with section 3203. Such training shall be conducted annually for all employees using or who will be assisting others in using the lift. The Applicant shall notify Cal/OSHA in writing that training has been conducted. A copy of the training manual (used for the subject training), and documentation identifying the trainer and attendees shall be maintained for at least 1 year and provided to Cal/OSHA upon request.
10. Any CQCC performing inspections, maintenance, servicing or testing of the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the lift is ready for inspection, and the lift shall be inspected by Cal/OSHA and a Permit to Operate shall be issued before the lift is put into service.
12. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorize representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.
13. This Decision and Order shall remain in effect unless duly modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed by the Board's regulations.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 24, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-464	California Rural Legal Assistance, Inc.	715 H. Street Modesto, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-464	1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-465	J.S. West Milling Company	3001 Healthcare Way Modesto, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-465	1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-466	Page I Estate LLC	427 Page St. San Jose, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-466	1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-467	Page II Estate LLC	426 Page St. San Jose, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-467	1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Schindler Model 3300 Elevators, w/variant Gov. Ropes and Sheaves (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-468	Rocklin Sierra 703, L.P.	4930 Rocklin Rd. Rocklin, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Pete Cuellar, with SCHINDLER ELEVATOR CORPORATION, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize Schindler model 3300 MRL elevator cars, in the quantity, at the locations specified in Jurisdictional and Procedural Matters, section 1.
2. The installation contract for these elevators was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. The Schindler model 3300 MRL elevator cars are not supported by circular steel wire ropes, as required by the Elevator Safety Orders. They utilize non circular elastomeric coated steel belts and specialized suspension means fastenings.
4. No machine room is provided, preventing the inspection transfer switch from being located in the elevator machine room. The lack of machine room also prevents the seismic reset switch from being located in the elevator machine room.
5. Applicant proposes to relocate the inspection transfer switch and seismic reset switch in an alternative enclosure.
6. Due to the use of a 6 mm (0.25 in.) governor rope with 6-strand construction, the provided governor sheave pitch diameter is less than that required by the Elevator Safety Orders.
7. The driving machine and governor are positioned in the hoistway and restrict the required overhead clearance to the elevator car top.
8. Applicant proposes to insert the car top railings at the perimeter of the car top.
9. Applicant intends to use an elevator control system, model CO NX100NA or CO NX300NA, with a standalone, solid state motor control drive system that includes devices and circuits having a Safety Integrity Level (SIL) rating to execute specific elevator safety functions.

D. Relevant Safety Order Provisions

Applicant seeks a permanent variance from section 3141 [ASME A17.1-2004, sections 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4, 2.20.9.5.4, 2.26.1.4.4(a), 8.4.10.1.1(a)(2)(b), 2.14.1.7.1, 2.18.7.4, and 2.26.9.6.1] of the Elevator Safety Orders, with respect to the suspension ropes and connections, inspection transfer switch relocation, seismic reset switch relocation, the location and construction of car-top railings, governor-sheave diameter, and means of removing power from the driving machine motor for one (1) Schindler model 3300 MRL elevator.

The relevant language of those sections are below.

1. Suspension Means

- Section 3141 [ASME A17.1-2004, section 2.20.1, Suspension Means] states in part:
    - Elevator cars shall be suspended by steel wire ropes attached to the car frame or passing around sheaves attached to the car frame specified in 2.15.1. Ropes that have previously been installed and used on another installation shall not be reused. Only iron (low carbon steel) or steel wire ropes, having the commercial classification “Elevator Wire Rope,” or wire rope specifically constructed for elevator use, shall be used for the suspension of elevator cars and for the suspension of counterweights. The wire material for ropes shall be manufactured by the open hearth or electric furnace process, or their equivalent.

- Section 3141 [ASME A17.1-2004, section 2.20.2.1(b), On Crosshead Data Plate] states in part:
    - The crosshead data plate required by 2.16.3 shall bear the following wire rope data:
        - (b) the diameter in millimeters (mm) or inches (in.)

- Section 3141 [ASME A17.1-2004, section 2.20.2.2(a) and (f) On Rope Data Tag] states in part:
    - A metal data tag shall be securely attached to one of the wire rope fastenings. This data tag shall bear the following wire rope data:
    - (a) the diameter in millimeters (mm) or inches (in.)
    - […]
    - (f) whether the ropes were non preformed or preformed

- Section 3141 [ASME A17.1-2004, section 2.20.3, Factor of Safety] states:
    - The factor of safety of the suspension wire ropes shall be not less than shown in Table 2.20.3. Figure 8.2.7 gives the minimum factor of safety for intermediate rope speeds. The factor of safety shall be based on the actual rope speed corresponding to the rated speed of the car.
    - The factor of safety shall be calculated by the following formula:

$$f = \frac{(S \times N)}{W}$$

- where:
    - N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.
    - S = manufacturer's rated breaking strength of one rope
    - W = maximum static load imposed on all car ropes with the car and its rated load at

any position in the hoistway

- Section 3141 [ASME A17.1-2004, section 2.20.4, Minimum Number and Diameter of Suspension Ropes] states:
  - The minimum number of hoisting ropes used shall be three for traction elevators and two for drum type elevators.
  - Where a car counterweight is used, the number of counterweight ropes used shall be not less than two.
  - The term “diameter,” where used in reference to ropes, shall refer to the nominal diameter as given by the rope manufacturer.
  - The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.

- Section 3141 [ASME A17.1-2004, section 2.20.9.3.4] states:
  - Cast or forged steel rope sockets, shackle rods, and their connections shall be made of unwelded steel, having an elongation of not less than 20% in a gauge length of 50 mm (2 in.), when measured in accordance with ASTM E 8, and conforming to ASTM A 668, Class B for forged steel, and ASTM A 27, Grade 60/30 for cast steel, and shall be stress relieved. Steels of greater strength shall be permitted, provided they have an elongation of not less than 20% in a length of 50 mm (2 in.).

- Section 3141 [ASME A17.1-2004, section 2.20.9.5.4] states:
  - When the rope has been seated in the wedge socket by the load on the rope, the wedge shall be visible, and at least two wire rope retaining clips shall be provided to attach the termination side to the load carrying side of the rope (see Fig. 2.20.9.5). The first clip shall be placed a maximum of 4 times the rope diameter above the socket, and the second clip shall be located within 8 times the rope diameter above the first clip. The purpose of the two clips is to retain the wedge and prevent the rope from slipping in the socket should the load on the rope be removed for any reason. The clips shall be designed and installed so that they do not distort or damage the rope in any manner.

2. Requested Transfer Switch Placement Variance

- As it pertains to installation of the requisite transfer switch within a “machine room” location incompatible with machine-room-less design of the Schindler Model 3300 elevator, the Applicant presently seeks permanent variance from the following Elevator Safety Order incorporated ASME Code A17.1-2004, subsection:
  - Subsection 2.26.1.4.4(a)--Transfer Switch Placement in Machine Room

- Section 3141[ASME A17.1-2004, section 2.26.1.4.4(a), Machine Room Inspection Operation] states:
- When machine room inspection operation is provided, it shall conform to 2.26.1.4.1, and the transfer switch shall be

- (a) located in the machine room[.]

3. Requested Seismic Reset Switch Placement Variance

- As it pertains to installation of the requisite seismic reset switch within a “machine room” location incompatible with machine-room-less design of the Schindler Model 3300 elevator, the Applicant presently seeks permanent variance from the following Elevator Safety Order incorporated ASME Code subsection:
  - Subsection 8.4.10.1.1(a)(2)(b)--Seismic Reset Switch Placement in Machine Room

- Section 3141[ASME A17.1-2004, section 8.4.10.1.1(a)(2)(b), Earthquake Equipment] states:
  - (a) All traction elevators operating at a rated speed of 0.75 m/s (150 ft/min) or more and having counterweights located in the same hoistway shall be provided with the following:
  - (1) seismic zone 3 or greater: a minimum of one seismic switch per building
  - (2) seismic zone 2 or greater:
    - (a) a displacement switch for each elevator
    - (b) an identified momentary reset button or switch for each elevator, located in the control panel in the elevator machine room

4. Requested Car Top Railing Inset Variance

- As it pertains to top of car railing placement requiring space occupied by upper hoistway mounted elevator machinery characteristic of the Schindler Model 3300 elevator, the Applicant presently seeks permanent variance from the following Elevator Safety Order incorporated ASME Code A17.1-2004, section:
  - Section 2.14.1.7.1—Top of Car Perimeter Railing Placement

- Section 3141[ASME A17.1-2004, section 2.14.1.7.1] states:
  - A standard railing conforming to 2.10.2 shall be provided on the outside perimeter of the car top on all sides where the perpendicular distance between the edges of the car top and the adjacent hoistway enclosure exceeds 300 mm (12 in.) horizontal clearance.

5. Pitch Diameter of Governor Sheaves

- Section 3141 [ASME A17.1-2004, Section 2.18.7.4] states:
  - “The pitch diameter of governor sheaves and governor tension sheaves shall be not less than the product of the diameter of the rope and the applicable multiplier listed in Table 2.18.7.4, based on the rated speed and the number of strands in the rope.”

Table 2.18.7.4 Multiplier for Determining Governor Sheave Pitch Diameter
[from ASME A17.1-2004]

Rated Speed m/s (ft./min)	**Number of Strands**	**Multiplier**
1.00 or less (200 or less)	6	42
1.00 or less (200 or less)	8	30
Over 1.0 (over 200)	6	46
Over 1.0 (over 200)	8	32

6. SIL Rated System to Inhibit Current Flow to AC Drive Motor
    - Section 3141[ASME A17.1-2004, section 2.26.9.6.1] states:
        - Two separate means shall be provided to independently inhibit the flow of alternating current through the solid state devices that connect the direct current power source to the alternating current driving motor. At least one of the means shall be an electromechanical relay.

E. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicant's proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Order from which variance is being sought.

F. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above table in Jurisdictional and Procedural Matters shall have permanent variances from sections 3041, subdivision (e)(1)(C) and 3141.7, subdivision (b) subject of the following conditions:

Elevator Safety Orders:

- Suspension Means: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4, and 2.20.9.5.4 (Only to the extent necessary to permit the use of the Elastomeric coated Steel Belts proposed by the Applicant, in lieu of circular steel suspension ropes.);
- Inspection transfer switch: 2.26.1.4.4(a) (Only to the extent necessary to permit the inspection transfer switch to reside at a location other than the machine room);

- Seismic reset switch: 8.4.10.1.1(a)(2)(b) (Only to the extent necessary to permit the seismic reset switch to reside at a location other than the machine room. room);
- Car Top Railing: 2.14.1.7.1 (Only to the extent necessary to permit the use of the car top railing system proposed by the Applicant, where the railing system is located inset from the elevator car top perimeter);
- Governor Rope and Sheave: The Applicant shall conditionally hold permanent variance from certain requirements of section 3141, incorporated section of ASME A17.1-2004, to the limited extent variance is necessary to allow for the below specified governor rope and governor sheave parameters: section 2.18.7.4.
- Means of Removing Power: 2.26.9.6.1 (Only to the extent necessary to permit the use of SIL rated devices and circuits as a means to remove power from the AC driving motor, where the redundant monitoring of electrical protective devices is required by the Elevator Safety Orders).

Conditions:

1. The elevator suspension system shall comply to the following:
    a. The suspension traction media (STM) members and their associated fastenings shall conform to the applicable requirements of ASME A17.1-2013, sections:
        - 2.20.4.3 - Minimum Number of Suspension Members
        - 2.20.3 - Factor of Safety
        - 2.20.9 - Suspension Member Fastening

    b. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection and testing of the STM members, fastenings, related monitoring and detection systems, and criteria for STM replacement. The Applicant shall make those procedures and criteria available to the Certified Competent Conveyance Mechanic (CCCM) at the location of the elevator, and to the Cal/OSHA upon request.
        - STM member mandatory replacement criteria shall include:
            i. Any exposed wire, strand or cord;
            ii. Any wire, strand or cord breaks through the elastomeric coating;
            iii. Any evidence of rouging (steel tension element corrosion) on any part of the elastomeric coated steel suspension member;
            iv. Any deformation in the elastomeric suspension member such as, but not limited to, kinks or bends;

    c. Traction drive sheaves must have a minimum diameter of 72 mm. The maximum speed of STM members running on 72 mm, 87 mm and 125 mm drive sheaves shall be no greater than 2.5 m/s, 6.0 m/s and 8.0 m/s respectively.

    d. If any one STM member needs replacement, the complete set of suspension members on the elevator shall be replaced. Exception: if a new suspension member is damaged during

installation, and prior to any contemporaneously installed STM having been placed into service, it is permissible to replace the individual damaged suspension member. STM members that have been installed on another installation shall not be re used.

e. A traction loss detection means shall be provided that conforms to the requirements of ASME A17.1-2013, section 2.20.8.1. The means shall be tested for correct function annually in accordance with ASME A17.1-2013, section 8.6.4.19.12.

f. A broken suspension member detection means shall be provided that conforms to the requirements of ASME A17.1-2013, section 2.20.8.2. The means shall be tested for correct function annually in accordance with ASME A17.1-2013, section 8.6.4.19.13(a).

g. An elevator controller integrated bend cycle monitoring system shall monitor actual STM bend cycles, by means of continuously counting, and storing in nonvolatile memory, the number of trips that the STM makes traveling, and thereby being bent, over the elevator sheaves. The bend cycle limit monitoring means shall automatically stop the car normally at the next available landing before the bend cycle correlated residual strength of any single STM member drops below 80 percent of full rated strength. The monitoring means shall prevent the car from restarting. The bend cycle monitoring system shall be tested annually in accordance with the procedures required by condition 1b above.

h. The elevator shall be provided with a device to monitor the remaining residual strength of each STM member. The device shall conform to the requirements of Cal/OSHA Circular Letter E-10-04, a copy of which is attached hereto as Exhibit 1 and incorporated herein by reference.

i. The elevator crosshead data plate shall comply with the requirements of ASME A17.1 2013, section 2.20.2.1.

j. A suspension means data tag shall be provided that complies with the requirements of ASME A17.1 2013, section 2.20.2.2.

k. Comprehensive visual inspections of the entire length of each and all installed suspension members, to the criteria developed in condition 1b, shall be conducted and documented every six months by a CCCM.

l. The Applicant shall be subject to the requirements set out in Exhibit 2 of this Decision and Order, “Suspension Means Replacement Reporting Condition,” Incorporated herein by this reference.

m. Records of all tests and inspections shall be maintenance records subject to ASME A17.1 2004, sections 8.6.1.2 and 8.6.1.4, respectively.

2. If the inspection transfer switch required by ASME A17.1-2004, section 2.26.1.4.4 does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the control/machinery room/space containing the elevator's control equipment in an enclosure secured by a lock openable by a Group 1 security key. The enclosure is to remain locked at all times when not in use.

3. If the seismic reset switch does not reside in the machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the control/machinery room/space containing the elevator's control equipment in an enclosure secured by a lock openable by a Group 1 security key. The enclosure is to remain locked at all times when not in use.

4. If there is an inset car top railing:

    a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on the railings to perform adjustments, maintenance, repairs or inspections. The Applicant shall not permit anyone to stand or climb over the car top railing.

    b. The distance that the railing can be inset shall be limited to not more than 6 inches.

    c. All exposed areas of the car top outside the car top railing where the distance from the railing to the edge of the car top exceeds 2 inches, shall be beveled with metal, at an angle of not less than 75 degrees with the horizontal, from the mid or top rail to the outside of the car top, such that no person or object can stand, sit, kneel, rest, or be placed in the exposed areas.

    d. The top of the beveled area and/or car top outside the railing shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

    e. The applicant shall provide durable signs with lettering not less than 1/2 inch on a contrasting background on each inset railing. Each sign shall state:

CAUTION
STAY INSIDE RAILING
NO LEANING BEYOND RAILING
NO STEPPING ON, OR BEYOND, RAILING

    f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing will be measured from the car top and not from the required bevel).

5. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a steel 6 mm (0.25 in.) diameter governor rope with 6 strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 200 mm (7.87 in.).

6. The SIL rated devices and circuits used to inhibit electrical current flow in accordance with ASME A17.1-2004, section 2.26.9.6.1 shall comply with the following:

    a. The SIL-rated devices and circuits shall consist of a Variodyn SIL3 rated Regenerative, Variable Voltage Variable Frequency (VVVF) motor drive unit, model VAF013, VAF023, or VAF043 labeled or marked with the SIL rating (not less than SIL 3), the name or mark of the certifying organization, and the SIL certification number (968/FSP 1556.00), and followed by the applicable revision number (as in 968/FSP 1556.00/19).

    b. The devices and circuits shall be certified for compliance with the applicable requirements of ASME A17.1-2013, section 2.26.4.3.2.

    c. The access door or cover of the enclosures containing the SIL rated components shall be

clearly labeled or tagged on their exterior with the statement:

Assembly contains SIL rated devices.
Refer to Maintenance Control Program and
wiring diagrams prior to performing work.

d. Unique maintenance procedures or methods required for the inspection, testing, or replacement of the SIL rated circuits shall be developed and a copy maintained in the elevator machine/control room/space. The procedures or methods shall include clear color photographs of each SIL rated component, with notations identifying parts and locations.

e. Wiring diagrams that include part identification, SIL, and certification information shall be maintained in the elevator machine/control room/space.

f. A successful test of the SIL rated devices and circuits shall be conducted initially and not less than annually in accordance with the testing procedure. The test shall demonstrate that SIL rated devices, safety functions, and related circuits operate as intended.

g. Any alterations to the SIL rated devices and circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific provisions for the alteration of SIL rated devices, the alterations shall be made in conformance with ASME A17.1-2013, section 8.7.1.9.

h. Any replacement of the SIL rated devices and circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific provisions for the replacement of SIL rated devices, the replacement shall be made in conformance with ASME A17.1-2013, section 8.6.3.14.

i. Any repairs to the SIL rated devices and circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific provisions for the repair of SIL rated devices, the repairs shall be made in conformance with ASME A17.1-2013, section 8.6.2.6.

j. Any space containing SIL rated devices and circuits shall be maintained within the temperature and humidity range specified by Schindler Elevator Corporation. The temperature and humidity range shall be posted on each enclosure containing SIL rated devices and circuits.

k. Field changes to the SIL rated system are not permitted. Any changes to the SIL rated system's devices and circuitry will require recertification and all necessary updates to the documentation and diagrams required by conditions d. and e. above.

7. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and all applicable requirements met, including conditions of this permanent variance, prior to a Permit to Operate the elevator being issued. The elevator shall not be placed in service prior to the Permit to Operate being issued by Cal/OSHA.

8. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way that the Applicant was required to notify them of the docketed application for permanent variance per sections 411.2 and 411.3.

9. This Decision and Order shall remain in effect unless duly modified or revoked upon application by Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 24, 2026



Kelly Chau, Hearing Officer

EXHIBIT 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA Elevator Unit HQS

EXHIBIT 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings. Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): CAL/OSHA Elevator Unit, 2 MacArthur Pl., Suite 700, Santa Ana, CA 92707, Attn: Engineering Section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance file number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME Al7.l-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 500 Elevators (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-469	City of Los Angeles, Dept. of Public Works	478 W. 6th St. San Pedro, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).

2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.

3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.

4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).

5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.

6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a “Permit to Operate” issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby incorporated Decision and Order Appendix 2.
13. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.
14. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-469	1	5	8254	200	2000

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 300 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-470	929 18th Street, LLC	929 18th St. Bakersfield, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 300 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 300 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1 2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 300 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room / space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-470	1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 500 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-471	Mercy Housing California 91, L.P.	2125 Telegraph Ave. Oakland, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

    A reduced diameter governor rope of equivalent construction and material to that required by

ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1-2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room/space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.
11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a "Permit to Operate" issued before the elevator is placed in service.
12. The Applicant shall comply with suspension means replacement reporting condition per hereby

incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026

Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-471	1	8	11706	350	3500
26-V-471	2	8	11706	350	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 500 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-472	Balboa Lee Ave LP	505 Mayor Edwin M. Lee San Francisco, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

A reduced diameter governor rope of equivalent construction and material to that required by ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1-2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and

conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room/space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.

11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a “Permit to Operate” issued before the elevator is placed in service.

12. The Applicant shall comply with suspension means replacement reporting condition per hereby incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-472	1	7	12247	150	3500
26-V-472	2	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 500 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-473	Odd Fellows Home of California	14500 Fruitvale Ave., 1001 Building Saratoga, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

A reduced diameter governor rope of equivalent construction and material to that required by ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1-2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and

conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room/space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.

11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a “Permit to Operate” issued before the elevator is placed in service.

12. The Applicant shall comply with suspension means replacement reporting condition per hereby incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-473	AD1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 500 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-474	Odd Fellows Home of California	14500 Fruitvale Ave., 9000 Building Saratoga, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

A reduced diameter governor rope of equivalent construction and material to that required by ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1-2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and

conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room/space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.

11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a “Permit to Operate” issued before the elevator is placed in service.

12. The Applicant shall comply with suspension means replacement reporting condition per hereby incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-474	A1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 500 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-475	Odd Fellows Home of California	14500 Fruitvale Ave., 11000 Building Saratoga, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

A reduced diameter governor rope of equivalent construction and material to that required by ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1-2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and

conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room/space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.

11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a “Permit to Operate” issued before the elevator is placed in service.

12. The Applicant shall comply with suspension means replacement reporting condition per hereby incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-475	C1	7	12247	150	3500
26-V-475	C2	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

TK Elevator Evolution (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-477	Palomar Residences, LLC	3150 El Camino Real Palo Alto, CA	5

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, James Day, with TK Elevator Corporation, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Applicant proposes to utilize inset car top railings and guards in compliance with ASME 17.1-2013, section 2.14.1.7.1 and the Vivante Westside, LLC File No. 18-V-364 (Nov. 20, 2020) decision (Vivante). Applicant further claims that the request is consistent with the Vivante, the Mack Urban, LLC, Permanent Variance No. 15-V-349 (Nov. 17, 2016), and the Patton Equities, LLC Permanent Variance No. 20-V-128 (Nov. 12, 2020) decisions (Patton Equities).
2. Applicant proposes to utilize noncircular elastomeric-coated steel belts ("ECSBs") rather than steel ropes in a machine room-less ("MRL") elevator installation, with updated data plates, data tags, and wedge sockets designed for use with ECSBs, as well as the appropriate factor of safety criteria conforming to ASME 17.1-2013, with a continuous residual strength detection device ("RSDD") compliant with the San Francisco Public Works (Permanent Variance No. 21-V-061, et al.) decisions.
3. The installation shall utilize the TK Elevator Model 104DP001 RSDD, accepted by Cal/OSHA on May 4, 2021.
4. Applicant proposes to comply with ASME A17.1-2013 sections 2.26.9.3, "Protection Against Failures", rather than the requirements of 2.26.9.3 and 2.26.9.4 in the ASME 2004 code.
5. Applicant proposes to use TKE's control systems, using the TKE TAC32T Controller with SIL3 rated elements, to provide equivalent safety to ASME A17.1-2004, section 2.26.9.4 as a means to inhibit flow of Alternating Current to the Driving Motor in compliance with ASME A17.1-2013, section 2.26.9.6.
6. Applicant proposes to locate the Inspection Transfer Switch within the machinery/control room/space in the MRL installation, in compliance with ASME 17.1-2013, section 2.26.1.4.
7. Applicant proposes to locate the Seismic-Operation Reset Switch in the machinery/control room/space in the MRL installation.

D. Relevant Safety Orders

Variance Request No. 1 (ASME A17.1-2004, section 2.14.1.7.1)

2.14.1.7.1 A standard railing conforming to 2.10.2 shall be provided on the outside perimeter of the car top on all sides where the perpendicular distance between the edges of the car top and the adjacent hoistway enclosure exceeds 300 mm (12 in.) horizontal clearance.

Variance Request No. 2A (ASME A17.1-2004, section 2.20.1)

2.20.1 Suspension Means

Elevator cars shall be suspended by steel wire ropes attached to the car frame or passing around sheaves attached to the car frame specified in 2.15.1. Ropes that have previously been installed and used on another installation shall not be reused.

Only iron (low-carbon steel) or steel wire ropes, having the commercial classification "Elevator Wire Rope," or wire rope specifically constructed for elevator use, shall be used for the suspension of elevator cars and for the suspension of counterweights. The wire material for ropes shall be manufactured by the open-hearth or electric furnace process or their equivalent.

Variance Request No. 2B (ASME A17.1-2004, section 2.20.2[.1])

2.20.2.1 On Crosshead Data Plate.

The crosshead data plate required by 2.16.3 shall bear the following wire-rope data:

(a) the number of ropes

(b) the diameter in millimeters (mm) or inches (in.)

(c) the manufacturer's rated breaking strength per rope in kilo Newton (kN) or pounds (lb)

Variance Request No. 2C (ASME A17.1-2004, section 2.20.2.2)

2.20.2.2 On Rope Data Tag.

A metal data tag shall be securely attached to one of the wire-rope fastenings. This data tag shall bear the following wire-rope data:

(a) the diameter in millimeters (mm) or inches (in.)

[…]

(f) whether the ropes were nonpreformed or preformed

[…]

Variance Request No. 2D. (ASME A17.1-2004, section 2.20.3)

2.20.3 Factor of Safety

The factor of safety of the suspension wire ropes shall be not less than shown in Table 2.20.3. Figure 8.2.7 gives the minimum factor of safety for intermediate rope speeds. The factor of safety shall be based on the actual rope speed corresponding to the rated speed of the car.

The factor of safety shall be calculated by the following formula:

$$f = \frac{(S \times N)}{W}$$

where:

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

Variance Request No. 2E (ASME A17.1-2004, section 2.20.4)

2.20.4 Minimum Number and Diameter of Suspension Ropes

The minimum number of hoisting ropes used shall be three for traction elevators and two for drum-type elevators.

Where a car counterweight is used, the number of counterweight ropes used shall be not less than two.

The term" diameter," where used in reference to ropes, shall refer to the nominal diameter as given by the rope manufacturer.

The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.

Variance Request No. 2F (ASME A17.1-2004, section 2.20.9[.1])

2.20.9 Suspension-Rope Fastening

2.20.9.1 Type of Rope Fastenings. The car and counterweight ends of suspension wire ropes, or the stationary hitch-ends where multiple roping is used, shall be fastened in such a manner that all portions of the rope, except the portion inside the rope sockets, shall be readily visible.

Fastening shall be

(a) by individual tapered rope sockets (see 2.20.9.4) or other types of rope fastenings that have undergone adequate tensile engineering tests, provided that

(1) such fastenings conform to 2.20.9.2 and 2.20.9.3;

(2) the rope socketing is such as to develop at least 80% of the ultimate breaking strength of the strongest rope to be used in such fastenings; or

(b) by individual wedge rope sockets (see 2.20.9.5); and

(c) U-bolt-type rope clamps or similar devices shall not be used for suspension rope fastenings.

Variance Request No. 3 (ASME A17.1-2004, section 2.26.9.4)

2.26.9.4 Redundant devices used to satisfy 2.26.9.3 in the determination of the occurrence of a single ground, or the failure of any single magnetically operated switch, contactor or relay, or of any single solid state device, or any single device that limits the leveling or truck zone, or a software system failure, shall be checked prior to each start of the elevator from a landing, when on automatic operation. When a single ground or failure, as specified in 2.26.9.3, occurs, the car shall not be permitted to restart. Implementation of redundancy by a software system is permitted, provided that the removal of power from the driving-machine motor and brake shall not be solely dependent on software-controlled means.

Variance Request No. 4 (ASME A17.1-2004, section 2.26.9.6.1)

2.26.9.6.1 Two separate means shall be provided to independently inhibit the flow of alternating-current through the solid state devices that connect the direct-current power source to the alternating-current driving motor. At least one of the means shall be an electromechanical relay.

Variance Request No. 5 (ASME A17.1-2004, section 2.26.1.4.4(a))

2.26.1.4.4 Machine Room Inspection Operation

(a) When machine room inspection operation is provided, it shall conform to 2.26.1.4.1, and the transfer switch shall be located in the machine room.

Variance Request No. 6 (ASME A17.1-2004, section 8.4.10.1.1(a)(2)(b))

8.4.10.1.1 Earthquake Equipment (See Also Fig. 8.4.10.1.1)

(a) All traction elevators operating at a rated speed of 0.75 m/s (150 ft/min) or more and having counterweights located in the same hoistway shall be provided with the following:

(1) seismic zone 3 or greater: a minimum of one seismic switch per building

(2) seismic zone 2 or greater:

(a) a displacement switch for each elevator

(b) an identified momentary reset button or switch for each elevator, located in the control panel in the elevator machine room [see 8.4.10.1.3(i)]

E. Decision and Order

Applicant is hereby conditionally GRANTED Permanent Variance as specified below, and to the limited extent, as of the date the Board adopts this Proposed Decision, with respect to the section A specified number of TKE EVO 200 elevator(s), at the specified location, each shall conditionally hold permanent variance from the following subparts of ASME A17.1-2004, currently incorporated by reference into section 3141 of the Elevator Safety Orders:

- Car-Top Railing: 2.14.1.7.1 (Limited to the extent necessary to permit the use of an inset car-top railing)
- Suspension Means: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, and 2.20.9.1

(Limited to the extent necessary to permit the use of the elastomeric-coated steel belts in lieu of circular steel suspension ropes)

- Inspection transfer switch: 2.26.1.4.4(a) (Limited to the extent necessary to permit the inspection transfer switch to reside at a location other than the machine room)
- Software Reliant Means to Remove Power: 2.26.9.4 (Limited to the extent necessary to permit the exclusive use of SIL-rated software systems as a means to remove power from the driving machine motor and brake)
- SIL-Rated Circuitry to Inhibit Current Flow: 2.26.9.6.1 (Limited to the extent necessary to permit the use of SIL-rated circuitry in place of an electromechanical relay to inhibit current flow to the drive motor)
- Seismic reset switch: 8.4.10.1.1(a)(2)(b) (Limited to the extent necessary to permit the seismic reset switch to reside at a location other than the machine room)

Inset Car Top Railing (Variance Request No. 1):

1.0 Any and all inset car top railings shall comply with the following:

1.1 Serviceable equipment shall be positioned so that mechanics and inspectors do not have to stand on or climb over the railings to perform adjustments, maintenance, repairs or inspections. The Applicant shall not permit trained elevator mechanics or elevator service personnel to stand or climb over the car top railing.

1.2 The distance that the railing can be inset shall be limited to not more than six inches (6”).

1.3 All exposed areas of the car top outside the car top railing where the distance from the railing to the edge of the car top exceeds two inches (2”), shall be beveled with metal, at an angle of not less than 75 degrees with the horizontal, from the mid or top rail to the outside of the car top, such that no person or object can stand, sit, kneel, rest, or be placed in the exposed areas.

1.4 The top surface of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4” diagonal red and white stripes.

1.5 The Applicant shall provide durable signs with lettering not less than 1/2 inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
STAY INSIDE RAILING
NO LEANING BEYOND RAILING
NO STEPPING ON, OR BEYOND, RAILING

1.6 The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing will be measured from the car top and not from the required bevel).

Suspension Means (Variance Request No. 2):

2.0 The elevator suspension system shall comply with the following:

2.1 The elastomeric coated steel belts (ECSBs) and their associated fastenings shall conform to the applicable requirements of ASME A17.1-2013, sections:

2.20.4.3 – Minimum Number of Suspension Members

2.20.3 – Factor of Safety

2.20.9 – Suspension Member Fastening

2.2 Additionally, ECSBs shall meet or exceed all requirements of ASME A17.6-2010, Standard for Elevator Suspension, Compensation, and Governor Systems, Part 3 Noncircular Elastomeric Coated Steel Suspension Members for Elevators.

2.3 The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection and testing of the ECSBs and fastenings and related monitoring and detection systems and criteria for ECSB replacement, and the Applicant shall make those procedures and criteria available to the Certified Competent Conveyance Mechanic (CCCM) at the location of the elevator, and to Cal/OSHA upon request.

2.4 ECSB mandatory replacement criteria shall include:

2.4.1. Any exposed wire, strand or cord;

2.4.2. Any wire, strand or cord breaks through the elastomeric coating;

2.4.3. Any evidence of rouging (steel tension element corrosion) on any part of the elastomeric coated steel suspension member;

2.4.4. Any deformation in the elastomeric suspension member such as, but not limited to, kinks or bends.

2.5 Traction drive sheaves must have a minimum diameter of 112 mm. The maximum speed of ECSBs running on 112 mm drive sheaves shall be no greater than 6.1 m/s.

2.6 If any one (1) ECSB needs replacement, the complete set of suspension members on the elevator shall be replaced. Exception: If a new suspension member is damaged during installation, and prior to any contemporaneously installed ECSB having been placed into service, it is permissible to replace the individual damaged suspension member. ECSBs that have been installed on another installation shall not be re used.

2.7 A traction loss detection means shall be provided that conforms to the requirements of ASME A17.1-2013, section 2.20.8.1. The means shall be tested for correct function annually in accordance with ASME A17.1-2013, section 8.6.4.19.12.

2.8 A broken suspension member detection means shall be provided that conforms to the requirements of ASME A17.1-2013, section 2.20.8.2. The means shall be tested for correct function annually in accordance with ASME A17.1-2013, section 8.6.4.19.13(a).

2.9 An elevator controller integrated bend cycle monitoring system shall monitor actual ECSB bend cycles, by means of continuously counting, and storing in nonvolatile memory, the number of trips that

the ECSB makes traveling, and thereby being bent, over the elevator sheaves. The bend cycle limit monitoring means shall automatically stop the car normally at the next available landing before the bend cycle correlated residual strength of any single ECSB member drops below (60%) sixty percent of full rated strength. The monitoring means shall prevent the car from restarting. Notwithstanding any less frequent periodic testing requirement per Addendum 2 (Cal/OSHA Circular Letter), the bend cycle monitoring system shall be tested semiannually in accordance with the procedures required per above Conditions 2.3 and 2.4.

2.10 The elevator crosshead data plate shall comply with the requirements of ASME A17.1-2013, section 2.20.2.1.

2.11 A suspension means data tag shall be provided that complies with the requirements of ASME A17.1-2013, section 2.20.2.2.

2.12 Comprehensive visual inspections of the entire length of each and all installed suspension members, in conformity with above Conditions 2.3 and 2.4 specified criteria, shall be conducted and documented every six (6) months by a CCCM.

2.13 The Applicant shall be subject to the requirements per hereto attached, and inhere incorporated, Addendum 1, “Suspension Means Replacement Reporting Condition.”

2.14 Records of all tests and inspections shall be maintenance records subject to ASME A17.1-2004, sections 8.6.1.2, and 8.6.1.4, respectively.

2.15 The subject elevators(s) shall be equipped with a TK Elevator Model 104DP001 Residual Strength Detection Device accepted by Cal/OSHA on May 4, 2021 or Cal/OSHA accepted equivalent device.

Control and Operating Circuits
Combined Software Redundant Devices with Software Removal of Power from Driving Motor and Brake (Variance Request No. 3)
Removal of Power from Driving Motor Without Electro-mechanical Switches (Variance Request No. 4)

3.0 The SIL rated circuitry used to provide device/circuit redundancy and to inhibit electrical current flow in accordance with ASME A17.1-2004, sections 2.26.9.4 and 2.26.9.6.1 shall comply with the following:

3.1 The SIL rated systems and related circuits shall consist of:

3.1.1. ELGO LIMAX33 RED, (aka LIMAX3R-03-050-0500-CNXTG-RJU), Safe Magnetic Absolute Shaft Information System, labeled or marked with the SIL rating (not less than SIL 3), the name or mark of the certifying organization, and the SIL certification number (968/A 163), followed by the applicable revision number (as in 968/A 163.07/19).

3.1.2 Printed circuit board assembly SSOA (6300 AHE001), labeled or marked with the SIL rating (not less than SIL 3), the name or mark of the certifying organization, and the SIL certification number (968/FSP 1347), followed by the applicable revision number (as in 968/FSP 1347.00/16).

3.1.3 Two circuit board components (Serializer S3I and S3O), each labeled or marked with the SIL rating (not less than SIL 3), the name or mark of the certifying organization and the SIL certification number (968/A 162), followed by the applicable revision number (as in 968/A 162.04/18)

3.2 The software system and related circuits shall be certified for compliance with the applicable requirements of ASME A17.1-2013, section 2.26.4.3.2.

3.3 The access door or cover of the enclosures containing the SIL rated components shall be clearly labeled or tagged on their exterior with the statement:

Assembly contains SIL rated devices.
Refer to maintenance Control Program and wiring diagrams
prior to performing work.

3.4 Unique maintenance procedures or methods required for the inspection, testing, or replacement of the SIL rated circuits shall be developed and a copy maintained in the elevator machine/control room/space. The procedures or methods shall include clear color photographs of each SIL rated component, with notations identifying parts and locations.

3.5 Wiring diagrams that include part identification, SIL, and certification information shall be maintained in the elevator machine/control room/space.

3.6 A successful test of the SIL rated circuits shall be conducted initially and not less than annually in accordance with the testing procedure. The test shall demonstrate that SIL rated devices, safety functions, and related circuits operate as intended.

3.7 Any alterations to the SIL rated circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific provisions for the alteration of SIL rated devices, the alterations shall be made in conformance with ASME A17.1-2013, section 8.7.1.9.

3.8 Any replacement of the SIL rated circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific provisions for the replacement of SIL rated devices, the replacement shall be made in conformance with ASME A17.1-2013, section 8.6.3.14.

3.9 Any repairs to the SIL rated circuits shall be made in compliance with the Elevator Safety Orders. If the Elevator Safety Orders do not contain specific provisions for the repair of SIL rated devices, the repairs shall be made in conformance with ASME A17.1-2013, section 8.6.2.6.

3.10 Any space containing SIL rated circuits shall be maintained within the temperature and humidity range specified by TKE. The temperature and humidity range shall be posted on each enclosure containing SIL rated software or circuits.

3.11 Field software changes to the SIL rated system are not permitted. Any changes to the SIL rated system’s circuitry will require recertification and all necessary updates to the documentation and diagrams required by Conditions 3.4 and 3.5 above.

Inspection Transfer Switch and Seismic Reset Switch (Variance Request Nos. 5 and 6):

4.0 Inspection Transfer switch and Seismic Reset switch placement and enclosure shall comply with the following:

4.1 If the inspection transfer switch required by ASME A17.1-2004, section 2.26.1.4.4, does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the control/machinery room/space containing the elevator's control equipment in an enclosure secured by a lock openable by a Group 1 security key. The enclosure is to remain locked at all times when not in use.

4.2 If the seismic reset switch does not reside in the machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the control/machinery room/space containing the elevator's control equipment in an enclosure secured by a lock openable by a Group 1 security key. The enclosure is to remain locked at all times when not in use.

5.0 The elevator shall be serviced, maintained, adjusted, tested, and inspected only by CCCM having been trained, and competent, to perform those tasks on the TKE EVO 200 elevator system in accordance with written procedures and criteria, including as required per above Conditions 2.3, and 2.4.

6.0 Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and all applicable requirements met, including conditions of this permanent variance, prior to a Permit to Operate the elevator being issued. The elevator shall not be placed in full service prior to the Permit to Operate being issued by Cal/OSHA.

7.0 The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2, and 411.3.

8.0 This Decision and Order shall remain in effect unless duly modified or revoked upon application by Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed by the Board's regulations.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 29, 2026

Kelly Chau, Hearing Officer

ADDENDUM 1

SUSPENSION MEANS REPLACEMENT REPORTING REQUIREMENTS

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, Attn: Engineering section, 2 MacArthur Place Suite 700, Santa Ana, CA 92707.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The Stateissued conveyance number, complete address, and Permanent Variance file number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, and certification expiration date of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which

case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2(a) above.

ADDENDUM 2

CIRCULAR LETTER E-10-04, October 6, 2010

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a nonfunctional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be nonfunctional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA Elevator Unit HQ

ADDENDUM 3

A. A Residual Strength Detection Device (RSDD) shall continuously monitor all Elastomeric Coated Steel Belt suspension members (ECSB), automatically stopping the car if the residual strength of any belt drops below 60%. The RSDD shall prevent the elevator from restarting after a normal stop at a landing. The RSDD shall device shall apply a form of electrical current and/or signal through the entire length of the steel tension elements of the ECSB and measure the current and/or signal on its return. The values measured shall be continuously compared to values that have been correlated to the remaining residual strength of the ECSB through testing. The required RSDD shall not rely upon giant magnetoresistance technology, or other magnetic measurement means, for residual strength detection or monitoring.

   The RSDD must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room or controller location. The removed RSDD must be replaced or returned to proper service within 30 days. If upon routine inspection, the RSDD device is found to be in a nonfunctional state, the date and findings are to be conspicuously documented in the elevator machine room or controller location.

   If upon inspection by Cal/OSHA, the RSDD is found to be nonfunctional or removed, and the required documentation is not in place, the elevator will be removed from service. If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

B. On or before November 21 2021, and thereafter, the above specified and documented RSDD shall be installed and operational on the subject elevator.

C. A successful functionality test of each RSDD shall be conducted once a year, and a copy of completed testing documentation conspicuously located in the machine room or within proximity of the controller.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

KONE Monospace 500 Elevators & Medical Emergency Elevator Car Dimensions (Group IV)

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 10, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-478	Odd Fellows Home of California	14500 Fruitvale Ave., 10000 Building Saratoga, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 10, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Fuei Saetern, with KONE INC., appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 10, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each respective Applicant intends to utilize the KONE, Inc. Monospace 500 type elevator, in the quantity, at the location, specified per the above section A.1 table.
2. The installation contract for this elevator was or will be signed on or after May 1, 2008, thus making the elevator subject to the Group IV Elevator Safety Orders.
3. Each Applicant proposes to use hoisting ropes that are 8 mm in diameter which also consist of 0.51 mm diameter outer wires, in variance from the express requirements of ASME A17.1-2004, section 2.20.4.
4. In relevant part, ASME A17.1-2004, section 2.20.4 states:

   2.20.4 Minimum Number and Diameter of Suspension Ropes

   …The minimum diameter of hoisting and counterweight ropes shall be 9.5 mm (0.375 in.). Outer wires of the ropes shall be not less than 0.56 mm (0.024 in.) in diameter.
5. An intent of ASME A17.1-2004, section 2.20.4, is to ensure that the number, diameter, and construction of suspension ropes are adequate to provided safely robust and durable suspension means over the course of the ropes' foreseen service life.
6. KONE has represented to Cal/OSHA, having established an engineering practice for purposes of Monospace 500 elevator design, of meeting or exceeding the minimum factor of safety of 12 for 8 mm suspension members, as required in ASME A17.1-2010 - under which, given that factor of safety, supplemental broken suspension member protection is not required.
7. Also, each Applicant proposes as a further means of maintaining safety equivalence, monitoring the rope in conformity with the criteria specified within the *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators* (per Application attachment "B", or as thereafter revised by KONE subject Cal/OSHA approval).
8. In addition, each Applicant has proposed to utilize 6 mm diameter governor ropes in variance from Title 8, section 3141, incorporated ASME A17.1-2004, section 2.18.5.1.
9. ASME A17.1-2004, section 2.18.5.1, specifies, in relevant part:

   2.18.5.1 Material and Factor of Safety.

   … [Governor ropes] not less than 9.5 mm (0.375 in.) in diameter. The factor of safety of governor ropes shall be not less than 5…
10. The Board takes notice of section 3141.7, subpart (a)(10):

A reduced diameter governor rope of equivalent construction and material to that required by ASME A17.1-2004, is permissible if the factor of safety as related to the strength necessary to activate the safety is 5 or greater;

11. Applicants propose use of 6mm governor rope having a safety factor of 5 or greater, in conformity with section 3141.7(a)(10), the specific parameters of which, being expressly set out within the Elevator Safety Orders (ESO), take precedence over more generally referenced governor rope diameter requirements per ASME A17.1-2004, section 2.18.5.1. Accordingly, the governor rope specifications being presently proposed, inclusive of a factor of safety of 5 or greater, would comply with current requirements, and therefore not be subject to issuance of permanent variance.

12. Absent evident diminution in elevator safety, over the past decade the Board has issued numerous permanent variances for use in KONE (Ecospace) elevator systems of 8 mm diameter suspension rope materially similar to that presently proposed (e.g. Permanent Variance Nos. 06-V-203, 08-V-245, and 13-V-303).

13. As noted by the Board in permanent Variance Nos. 18-V-044, and 18-V-045, Decision and Order Findings, subpart B.17 (hereby incorporated by reference), the strength of wire rope operating as an elevator's suspension means does not remain constant over its years of projected service life. With increasing usage cycles, a reduction in the cross-sectional area of the wire rope normally occurs, resulting in decreased residual strength. This characteristic is of particular relevance to the present matter because, decreasing wire rope diameter is associated with a higher rate of residual strength loss. This foreseeable reduction in cross-sectional area primarily results from elongation under sheave rounding load, as well as from wear, and wire or strand breaks. However, these characteristics need not compromise elevator safety when properly accounted for in the engineering of elevator suspension means, and associated components.

14. The presently proposed wire rope is Wuxi Universal steel rope Co LTD. 8 mm 8x19S+8x7+PP, with a manufacturer rated breaking strength of 35.8 kN, and an outer wire diameter of less than 0.56 mm, but not less than 0.51 mm. Cal/OSHA's safety engineer has scrutinized the material and structural specifications, and performance testing data, of this particular proposed rope, and concluded it will provide for safety equivalent to ESO compliant 9.5 mm wire rope, with 0.56 mm outer wire (under conditions of use included within the below Decision and Order).

15. The applicant supplies tabulated data regarding the "Maximum Static Load on All Suspension Ropes." To obtain the tabulated data, the applicant uses the following formula derived from ASME A17.1-2004, section 2.20.3:

$$W = \frac{(S \times N)}{f}$$ *where:*

W = maximum static load imposed on all car ropes with the car and its rated load at any position in the hoistway

N = number of runs of rope under load. For 2:1 roping, N shall be two times the number of ropes used, etc.

S = manufacturer's rated breaking strength of one rope

f = the factor of safety from Table 2.20.3

16. ASME A17.1-2010 sections 2.20.3 and 2.20.4 utilize the same formula, but provide for use of suspension ropes having a diameter smaller than 9.5 mm, under specified conditions, key among them being that use of ropes having a diameter of between 8 mm to 9.5 mm be engineered with a factor of safety of 12 or higher This is a higher minimum factor of safety than that proposed by Applicant but a minimum recommended by Cal/OSHA as a condition of variance necessary to the achieving of safety equivalence to 9.5 mm rope

17. Cal/OSHA is in accord with Applicant, in proposing as a condition of safety equivalence, that periodic physical examination of the wire ropes be performed to confirm the ropes continue to meet the criteria set out in the (Application attachment) *Inspector's Guide to 6 mm Diameter Governor and 8 mm Diameter Suspension Ropes for KONE Elevators*. Adherence to this condition will provide an additional assurance of safety equivalence, regarding smaller minimum diameter suspension rope outer wire performance over the course of its service life.

18. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

    (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:

    ...

    (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

    The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

    This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

19. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

20. Cal/OSHA, by way of written submission to the record (Exhibit PD3), and stated position at hearing, is of the well informed opinion that grant of permanent variance, as limited and

conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each Application being the subject of this proceeding, per above section A.1 table, is conditionally GRANTED, to the extent that each such Applicant shall be issued permanent variance from section 3141 incorporated ASME A17.1-2004, section 2.20.4, in as much as it precludes use of suspension rope of between 8 mm and 9.5 mm, or outer wire of between 0.51 mm and 0.56 mm in diameter, at such locations and numbers of Group IV KONE Monospace 500 elevators identified in each respective Application, subject to the following conditions:

1. The diameter of the hoisting steel ropes shall be not less than 8 mm (0.315 in) diameter and the roping ratio shall be two to one (2:1).
2. The outer wires of the suspension ropes shall be not less than 0.51 mm (0.02 in.) in diameter.
3. The number of suspension ropes shall be not fewer than those specified per hereby incorporated Decision and Order Appendix 1 Table.
4. The ropes shall be inspected annually for wire damage (rouge, valley break etc.) in accordance with "KONE, Inc. Inspector's Guide to 6 mm diameter and 8 mm diameter steel ropes for KONE Elevators" (per Application Exhibit B, or as thereafter amended by KONE subject to Cal/OSHA approval).
5. A rope inspection log shall be maintained and available in the elevator controller room/space at all times.
6. The elevator rated speed shall not exceed those speeds specified per the Decision and Order Appendix 1 Table.
7. The maximum suspended load shall not exceed those weights (plus 5%) specified per the Decision and Order Appendix 1 Table.
8. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of the elevator equipment in the hoistway is required. If the service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.
9. The installation shall meet the suspension wire rope factor of safety requirements of ASME A17.1-2013 section 2.20.3.
10. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing or testing the elevators shall be provided a copy of this variance decision.

11. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA and a “Permit to Operate” issued before the elevator is placed in service.

12. The Applicant shall comply with suspension means replacement reporting condition per hereby incorporated Decision and Order Appendix 2.

13. All medical emergency service elevator(s) shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC) section 3002.4.1a:

       The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.

15. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in the procedural manner prescribed.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

APPENDIX 1

File Number	Elevator ID	Minimum Suspension Ropes Per Elevator	Maximum Suspended Weight Per Elevator	Maximum Speed	Rated Capacity
26-V-478	D1	7	12247	150	3500

APPENDIX 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-479	Calvary Chapel of Chino Hills	4251 Eucalyptus Ave. Chino, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Medical Emergency Elevator Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-480	Compton Community College District	Compton College PE Complex - Building X 1111 E. Artesia Blvd. Compton, CA	0

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact and Applicable Regulations

1. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

> (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:
>
> ...
>
> (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

2. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:
The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A.1 table shall have permanent variances from sections 3041, subdivision (e)(1)(C) and 3141.7, subdivision (b) subject of the following conditions:

1. All medical emergency service elevator(s) shall comply with the requirements of the 2019 California Building Code section 3002.4.1a:

   > The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

2. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.
3. Dimensional drawings and other information necessary to demonstrate compliance with the conditions of this permanent variance decision shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).
4. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing the elevators shall be provided a copy of this variance decision.
5. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and all applicable requirements met, including conditions of this permanent variance, prior to a Permit to Operate the elevator being issued. The elevator shall not be placed in service prior to the Permit to Operate being issued by Cal/OSHA.
6. Applicant shall notify its employees and their authorized representative, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.
7. This Decision and Order shall remain in effect unless duly modified or revoked upon application by Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with then in effect administrative procedures of the Board.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Medical Emergency Elevator Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-481	Coral Blossom Apartments LP, A California Limited Partnership	8484 Elk Grove Florin Rd. Elk Grove, CA	0

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact and Applicable Regulations

1. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

> (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:
>
> ...
>
> (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

2. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:
The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A.1 table shall have permanent variances from sections 3041, subdivision (e)(1)(C) and 3141.7, subdivision (b) subject of the following conditions:

1. All medical emergency service elevator(s) shall comply with the requirements of the 2019 California Building Code section 3002.4.1a:

   > The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

2. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.
3. Dimensional drawings and other information necessary to demonstrate compliance with the conditions of this permanent variance decision shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).
4. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing the elevators shall be provided a copy of this variance decision.
5. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and all applicable requirements met, including conditions of this permanent variance, prior to a Permit to Operate the elevator being issued. The elevator shall not be placed in service prior to the Permit to Operate being issued by Cal/OSHA.
6. Applicant shall notify its employees and their authorized representative, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.
7. This Decision and Order shall remain in effect unless duly modified or revoked upon application by Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with then in effect administrative procedures of the Board.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Medical Emergency Elevator Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-482	Inglewood Park Cemetery	Mausoleum 720 E. Florence Ave. Inglewood, CA	0

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink with Otis Elevator Company, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact and Applicable Regulations

1. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

> (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:
>
> ...
>
> (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

2. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:
The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A.1 table shall have permanent variances from sections 3041, subdivision (e)(1)(C) and 3141.7, subdivision (b) subject of the following conditions:

1. All medical emergency service elevator(s) shall comply with the requirements of the 2019 California Building Code section 3002.4.1a:

   > The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

2. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.
3. Dimensional drawings and other information necessary to demonstrate compliance with the conditions of this permanent variance decision shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).
4. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing the elevators shall be provided a copy of this variance decision.
5. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and all applicable requirements met, including conditions of this permanent variance, prior to a Permit to Operate the elevator being issued. The elevator shall not be placed in service prior to the Permit to Operate being issued by Cal/OSHA.
6. Applicant shall notify its employees and their authorized representative, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.
7. This Decision and Order shall remain in effect unless duly modified or revoked upon application by Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with then in effect administrative procedures of the Board.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Medical Emergency Elevator Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-484	Bachem Americas Inc	1204 Park Center Dr. Vista, CA	0

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact and Applicable Regulations

1. Applicant requests a permanent variance from section 3041, subdivision (e)(1)(C), which states:

   > (1) All buildings and structures constructed after the effective date of this order that are provided with one or more passenger elevators shall be provided with not less than one passenger elevator designed and designated to accommodate the loading and transport of an ambulance gurney or stretcher maximum size 22 ½ in. (572 mm) by 75 in. (1.90 m) in its horizontal position and arranged to serve all landings in conformance with the following:
   >
   > ...
   >
   > (C) The elevator car shall have a minimum inside car platform of 80 in. (2.03 m) wide by 51 in. (1.30 m) deep.

   The intent of this language is to ensure that there is enough space to accommodate the access and egress of a gurney and medical personnel inside of a medical service elevator.

   This standard is made applicable to Group IV by section 3141.7, subdivision (b), which reads, "Elevators utilized to provide medical emergency service shall comply with Group II, section 3041(e)."

2. Applicant proposes to comply with the requirements of the 2019 California Building Code, section 3002.4.1a in the design of its medical emergency service elevator. That section requires:
   The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

   The purpose of this requirement is to ensure that an elevator designated for emergency medical service will accommodate a minimum of two emergency personnel with an ambulance gurney or stretcher.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A.1 table shall have permanent variances from sections 3041, subdivision (e)(1)(C) and 3141.7, subdivision (b) subject of the following conditions:

1. All medical emergency service elevator(s) shall comply with the requirements of the 2019 California Building Code section 3002.4.1a:

   > The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5-inch (127 mm) radius corners] in the horizontal, open position.

2. All medical emergency service elevator(s) shall be identified in the building construction documents in accordance with the 2019 California Building Code, section 3002.4a.
3. Dimensional drawings and other information necessary to demonstrate compliance with the conditions of this permanent variance decision shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).
4. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing the elevators shall be provided a copy of this variance decision.
5. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and all applicable requirements met, including conditions of this permanent variance, prior to a Permit to Operate the elevator being issued. The elevator shall not be placed in service prior to the Permit to Operate being issued by Cal/OSHA.
6. Applicant shall notify its employees and their authorized representative, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications pursuant to sections 411.2 and 411.3.
7. This Decision and Order shall remain in effect unless duly modified or revoked upon application by Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with then in effect administrative procedures of the Board.

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-485	Tustin Legacy Acquisition, LLC	Building 2 Parking Garage 16325 Compass Ave. Tustin, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink with Otis Elevator Company, appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table

PD2	OSHSB Notice of Hearing
PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision,

each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.

e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

a. The width and thickness in millimeters or inches;

b. The manufacturer's rated breaking strength in (kN) or (lbf);

c. The name of the person or organization that installed the flat coated steel belts;

d. The month and year the flat coated steel belts were installed;

e. The month and year the flat coated steel belts were first shortened;

f. The name or trademark of the manufacturer of the flat coated steel belts; and

g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

a. The number of belts;

b. The belt width and thickness in millimeters or inches; and

c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the

car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at

least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-486	CA Circle Family Apartments, LP	1397 California Cir. Milpitas, CA	1

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-487	ESC Senior, L.P.	700 E. St. John Street San Jose, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: September 30, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

BEFORE THE
OCCUPATIONAL SAFETY AND HEALTH STANDARDS BOARD
DEPARTMENT OF INDUSTRIAL RELATIONS
STATE OF CALIFORNIA

In the Matter of Application for Permanent Variance Regarding:

Otis Gen2S/Gen3Edge/Gen3 Core Elevator & Medical Emergency Car Dimensions

Permanent Variance No: See section A.1 table below

PROPOSED DECISION

Hearing Date: September 23, 2026
Location: Zoom

A. Subject Matter

1. The applicants ("Applicants") below have applied for permanent variances from provisions of the Elevator Safety Orders, found at title 8 of the California Code of Regulations. Unless otherwise noted, all references in this matter are to the California Code of Regulations, title 8. The variance applications are as follows:

Permanent Variance No.	Applicant Name	Variance Location Address	No. of Conveyances
26-V-488	GS Agoura Hills Venture Owner, LLC	29045 Agoura Rd. Agoura Hills, CA	2

2. This proceeding is conducted in accordance with Labor Code section 143 and section 401, et seq. of the Occupational Safety and Health Standards Board's ("Board" or "OSHSB") procedural regulations.

B. Procedural

1. This hearing was held on September 23, 2026 via videoconference by the Board with Hearing Officer Kelly Chau, both presiding and hearing the matter on its merit as a basis of proposed decision to be advanced to the Board for its consideration.

2. At the hearing, Dan Leacox, with Leacox & Associates, and Wolter Geesink, with Otis Elevator Company appeared on behalf of each Applicant; Jose Ceja and Mark Wickens appeared on behalf of the Division of Occupational Safety and Health ("Cal/OSHA").

3. Documentary and oral evidence was received at the hearing, and by stipulation of all parties, documents were admitted into evidence:

Exhibit Number	Description of Exhibit
PD1	Application(s) for Permanent Variance per section A.1 table
PD2	OSHSB Notice of Hearing

PD3	Cal/OSHA Review of Variance Application
PD4	Review Draft-1 Proposed Decision

4. Official notice is taken of the Board's files, records, recordings and decisions concerning the Elevator Safety Order requirements from which variance shall issue. On September 23, 2026, the hearing and record closed, and the matter was taken under submission by the Hearing Officer.

C. Findings of Fact

1. Each Applicant intends to utilize Otis Gen3 Edge/Gen2S/Gen3 Core elevators at the locations and in the numbers stated in the above section A.1 table. Applicant may utilize the variance from minimum inside car platform dimensions for other elevators designated for emergency medical service at the same variance location.
2. The installation contracts for these elevators were or will be signed on or after May 1, 2008, making the elevators subject to the Group IV Elevator Safety Orders.
3. The Board incorporates by reference the relevant findings in previous Board decisions:
    a. Items D.3 through D.9 of the Proposed Decision adopted by the Board on July 18, 2013 for Permanent Variance No. 12-V-093;
    b. Item D.4 of the Proposed Decision adopted by the Board on September 25, 2014 for Permanent Variance No. 14-V-206;
    c. Item B of the Proposed Decision adopted by the Board on September 15, 2022 for Permanent Variance No. 22-V-302 regarding medical emergency car dimensions; and
    d. Items C and D of the Proposed Decision adopted by the Board on June 20, 2024 for Permanent Variance No. 24-V-193 regarding the Gen3 Core elevator equivalent safety.
4. Cal/OSHA, by way of written submissions to the record (Exhibit PD-3), and position stated at hearing, is of the well informed opinion that grant of requested permanent variance, as limited and conditioned per the below Decision and Order will provide employment, places of employment, and subject conveyances, as safe and healthful as would prevail given non-variant conformity with the Elevator Safety Order requirements from which variance has been requested.

D. Conclusive Findings

A preponderance of the evidence supports the finding that each Applicants' proposal, subject to all conditions and limitations set forth in the below Decision and Order, will provide equivalent safety and health to that which would prevail upon full compliance with the requirements of the Elevator Safety Orders from which variance is being sought.

E. Decision and Order

Each permanent variance application the subject of this proceeding is conditionally GRANTED as specified below, and to the extent, as of the date the Board adopts this Proposed Decision, each Applicant listed in the above section A table shall have permanent variances from the following sections of ASME A17.1-2004 that section 3141 makes applicable to the elevators the

subject of those applications:

- **Car top railing**: sections 2.14.1.7.1 (to permit an inset car top railing, if, in fact, the car top railing is inset);
- **Speed governor over-speed switch**: 2.18.4.2.5(a) (to permit the use of the speed reducing system proposed by the Applicants, where the speed reducing switch resides in the controller algorithms, rather than on the governor, with the necessary speed input supplied by the main encoder signal from the motor);
- **Governor rope diameter**: 2.18.5.1 (to allow the use of reduced diameter governor rope);
- **Pitch diameter**: 2.18.7.4 (to permit the use of the speed-reducing system proposed by the Applicant, where the rope sheave pitch diameter is not less than 180 mm [7.1 in.]);
- **Suspension means**: 2.20.1, 2.20.2.1, 2.20.2.2(a), 2.20.2.2(f), 2.20.3, 2.20.4, 2.20.9.3.4 and 2.20.9.5.4—the variances from these "suspension means" provisions to permit the use of Otis Gen2 flat coated steel suspension belts in lieu of conventional steel suspension ropes;
- **Inspection transfer switch**: 2.26.1.4.4(a) (to allow the inspection transfer switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room); and
- **Seismic reset switch**: 8.4.10.1.1(a)(2)(b) (to allow the seismic reset switch to reside at a location other than a machine room, if, in fact, it does not reside in the machine room).
- **Minimum Inside Car Platform Dimensions**: 3041(e)(1)(C) and 3141.7(b) (to comply with the performance-based requirements of the 2019 California Building Code section 3002.4.1a)

These variances apply to the locations and numbers of elevators stated in the section A table (so long as the elevators are Gen3 Edge/Gen2S Group and Gen3 Core & Medical Emergency Elevator Car Dimensions (Group IV) that are designed, equipped, and installed in accordance with, and are otherwise consistent with, and are subject to the following conditions:

1. The suspension system shall comply with the following:
    a. The coated steel belt and connections shall have factors of safety equal to those permitted for use by section 3141 [ASME A17.1-2004, section 2.20.3] on wire rope suspended elevators.
    b. Steel coated belts that have been installed and used on another installation shall not be reused.
    c. The coated steel belt shall be fitted with a monitoring device which has been accepted by Cal/OSHA and which will automatically stop the car if the residual strength of any single belt drops below 60 percent. If the residual strength of any single belt drops below 60 percent, the device shall prevent the elevator from restarting after a normal stop at a landing.
    d. Upon initial inspection, the readings from the monitoring device shall be documented and submitted to Cal/OSHA.
    e. A successful test of the monitoring device's functionality shall be conducted at least once a year (the record of the annual test of the monitoring device shall be a maintenance

record subject to ASME A17.1-2004, section 8.6.1.4).

f. The coated steel belts used shall be accepted by Cal/OSHA.

2. With respect to each elevator subject to this variance, the applicant shall comply with Cal/OSHA Circular Letter E-10-04, the substance of which is attached hereto as Addendum 1 and incorporated herein by this reference.

3. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the installation, maintenance, inspection, and testing of the belts and monitoring device and criteria for belt replacement, and the applicant shall make those procedures and criteria available to Cal/OSHA upon request.

4. The flat coated steel belts shall be provided with a metal data tag that is securely attached to one of those belts. This data tag shall bear the following flat steel coated belt data:

   a. The width and thickness in millimeters or inches;

   b. The manufacturer's rated breaking strength in (kN) or (lbf);

   c. The name of the person or organization that installed the flat coated steel belts;

   d. The month and year the flat coated steel belts were installed;

   e. The month and year the flat coated steel belts were first shortened;

   f. The name or trademark of the manufacturer of the flat coated steel belts; and

   g. Lubrication information.

5. There shall be a crosshead data plate of the sort required by section 2.20.2.1, and that plate shall bear the following flat steel coated belt data:

   a. The number of belts;

   b. The belt width and thickness in millimeters or inches; and

   c. The manufacturer's rated breaking strength per belt in (kN) or (lbf).

6. The opening to the hoistway shall be effectively barricaded when car top inspection, maintenance, servicing, or testing of elevator equipment in the hoistway is required. If service personnel must leave the area for any reason, the hoistway and control room doors shall be closed.

7. If there is an inset car top railing:

   a. Serviceable equipment shall be positioned so that mechanics and inspectors do not have to climb on railings to perform adjustment, maintenance, repairs or inspections. The applicant shall not permit anyone to stand on or climb over the car top railing.

   b. The distance that the car top railing may be inset shall be limited to no more than 6 inches.

   c. All exposed areas outside the car top railing shall preclude standing or placing objects or persons which may fall and shall be beveled from the mid- or top rail to the outside of the car top.

d. The top of the beveled area and/or car top outside the railing, shall be clearly marked. The markings shall consist of alternating 4 inch diagonal red and white stripes.

e. The applicant shall provide durable signs with lettering not less than ½ inch on a contrasting background on each inset railing; each sign shall state:

CAUTION
DO NOT STAND ON OR CLIMB OVER RAILING

f. The Group IV requirements for car top clearances shall be maintained (car top clearances outside the railing shall be measured from the car top and not from the required bevel).

8. If the seismic reset switch does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
9. If the inspection transfer switch required by ASME A17.1, rule 2.26.1.4.4(a) does not reside in a machine room, that switch shall not reside in the elevator hoistway. The switch shall reside in the inspection and test control panel located in one upper floor hoistway door jamb or in the control space (outside the hoistway) used by the motion controller.
10. When the inspection and testing panel is located in the hoistway door jamb, the inspection and test control panel shall be openable only by use of a Security Group I restricted key.
11. The governor speed-reducing switch function shall comply with the following:
    a. It shall be used only with direct drive machines; i.e., no gear reduction is permitted between the drive motor and the suspension means.
    b. The velocity encoder shall be coupled to the driving machine motor shaft. The “C” channel of the encoder shall be utilized for velocity measurements required by the speed reducing system. The signal from “C” channel of the encoder shall be verified with the “A” and “B” channels for failure. If a failure is detected then an emergency stop shall be initiated.
    c. Control system parameters utilized in the speed-reducing system shall be held in non-volatile memory.
    d. It shall be used in conjunction with approved car-mounted speed governors only.
    e. It shall be used in conjunction with an effective traction monitoring system that detects a loss of traction between the driving sheave and the suspension means. If a loss of traction is detected, then an emergency stop shall be initiated.
    f. A successful test of the speed-reducing switch system’s functionality shall be conducted at least once a year (the record of the annual test of the speed-reducing switch system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).
    g. A successful test of the traction monitoring system’s functionality shall be conducted at least once a year (the record of the annual test of the traction monitoring system shall be a maintenance record subject to ASME A17.1-2004, section 8.6.1.4).

h. The Applicant shall not utilize the elevator unless the manufacturer has written procedures for the maintenance, inspection, and testing of the speed-reducing switch and traction monitoring systems. The Applicant shall make the procedures available to Cal/OSHA upon request.

12. The speed governor rope and sheaves shall comply with the following:

    a. The governor shall be used in conjunction with a 6 mm (0.25 in.) diameter steel governor rope with 6-strand, regular lay construction.

    b. The governor rope shall have a factor of safety of 8 or greater as related to the strength necessary to activate the safety.

    c. The governor sheaves shall have a pitch diameter of not less than 180 mm (7.1 in.).

13. All medical emergency service elevators shall comply with the following:

    a. The requirements of the 2019 California Building Code (CBC), section 3002.4.1a;

    The medical emergency service elevator shall accommodate the loading and transport of two emergency personnel, each requiring a minimum clear 21-inch (533 mm) diameter circular area and an ambulance gurney or stretcher [minimum size 24 inches by 84 inches (610 mm by 2134 mm) with not less than 5inch (127 mm) radius corners] in the horizontal, open position.

    b. All medical emergency service elevators shall be identified in the building construction documents in accordance with the 2019 CBC, section 3002.4a.

    c. Dimensional drawings and other information necessary to demonstrate compliance with these conditions shall be provided to Cal/OSHA, at the time of inspection, for all medical emergency service elevator(s).

14. The elevator shall be serviced, maintained, adjusted, tested, and inspected only by Certified Competent Conveyance Mechanics who have been trained to, and are competent to, perform those tasks on the Gen3 Edge/Gen2S/Gen3 Core elevator system in accordance with the written procedures and criteria required by Condition No. 3 and in accordance with the terms of this permanent variance.

15. Any Certified Qualified Conveyance Company performing inspections, maintenance, servicing, or testing of the elevators shall be provided a copy of this variance decision.

16. Cal/OSHA shall be notified when the elevator is ready for inspection. The elevator shall be inspected by Cal/OSHA, and a Permit to Operate shall be issued before the elevator is placed in service.

17. The Applicant shall be subject to the Suspension Means – Replacement Reporting Condition stated in Addendum 2, as hereby incorporated by this reference.

18. The Applicant shall notify its employees or their authorized representative(s), or both, of this order in the same way and to the same extent that employees and authorized representatives

are to be notified of docketed permanent variance applications.

19. This Decision and Order shall remain in effect unless modified or revoked upon application by the Applicant, affected employee(s), Cal/OSHA, or by the Board on its own motion, in accordance with the Board's procedural regulations at section 426, subdivision (b).

Pursuant to section 426(b), the Proposed Decision is submitted to the Board for consideration of adoption.

DATED: October 1, 2026



Kelly Chau, Hearing Officer

ADDENDUM 1

October 6, 2010

CIRCULAR LETTER E-10-04

TO: Installers, Manufacturers of Conveyances and Related Equipment and, Other Interested Parties

SUBJECT: Coated Steel Belt Monitoring

The Elevator Safety Orders require routine inspection of the suspension means of an elevator to assure its safe operation.

The California Labor Code section 7318 allows Cal/OSHA to promulgate special safety orders in the absence of regulation.

As it is not possible to see the steel cable suspension means of a Coated Steel Belt, a monitoring device which has been accepted by Cal/OSHA is required on all Coated Steel Belts which will automatically stop the car if the residual strength of any belt drops below 60%. The Device shall prevent the elevator from restarting after a normal stop at a landing.

The monitoring device must be properly installed and functional. A functioning device may be removed only after a determination has been made that the residual strength of each belt exceeds 60%. These findings and the date of removal are to be conspicuously documented in the elevator machine room. The removed device must be replaced or returned to proper service within 30 days.

If upon routine inspection, the monitoring device is found to be in a non-functional state, the date and findings are to be conspicuously documented in the elevator machine room.

If upon inspection by Cal/OSHA, the monitoring device is found to be non-functional or removed, and the required documentation is not in place, the elevator will be removed from service.

If the device is removed to facilitate belt replacement, it must be properly installed and functional before the elevator is returned to service.

A successful test of the device’s functionality shall be conducted once a year.

This circular does not preempt Cal/OSHA from adopting regulations in the future, which may address the monitoring of Coated Steel Belts or any other suspension means.

This circular does not create an obligation on the part of Cal/OSHA to permit new conveyances utilizing Coated Steel Belts.

Debra Tudor
Principal Engineer
Cal/OSHA-Elevator Unit HQS

ADDENDUM 2

Suspension Means - Replacement Reporting Condition

Beginning on the date the Board adopts this Proposed Decision and continuing for a period of two years, the Applicant shall report to Cal/OSHA within 30 days any and all replacement activity performed on the elevator(s) pursuant to the requirements of ASME A17.1-2004, section 8.6.3 involving the suspension means or suspension means fastenings.

Further:

1. A separate report for each elevator shall be submitted, in a manner acceptable to Cal/OSHA, to the following address (or to such other address as Cal/OSHA might specify in the future): Cal/OSHA Elevator Unit, 2 MacArthur Place, Suite 700, Santa Ana, CA 92707, Attn: Engineering section.
2. Each such report shall contain, but not necessarily be limited to, the following information:
    a. The State-issued conveyance number, complete address, and Permanent Variance number that identifies the permanent variance.
    b. The business name, complete address, telephone number, and contact person of the elevator responsible party (presumably the Applicant or the subsequent holder of this variance).
    c. The business name, complete address, telephone number, and Certified Qualified Conveyance Company (CQCC) certification number of the firm performing the replacement work.
    d. The name (as listed on certification), Certified Competent Conveyance Mechanic (CCCM) certification number, certification expiration date, and signature of each CCCM performing the replacement work.
    e. The date and time the elevator was removed from normal service for suspension replacement, the date and time the replacement work commenced, the date and time the replacement work was completed, and the date and time the elevator was returned to normal service.
    f. A detailed description of, and clear color photographs depicting, (1) all the conditions that existed in the suspension components requiring their replacement and (2) any conditions that existed to cause damage or distress to the suspension components being replaced.
    g. A detailed list of all elevator components adjusted, repaired, or replaced in conjunction with the suspension component replacement.
    h. All information provided on the crosshead data plate per ASME A17.1-2004, section 2.20.2.1, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.
    i. For the suspension means being replaced, all information provided on the data tag required per ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is

modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

j. For the replacement suspension means, all information provided on the data tag required by ASME A17.1-2004, section 2.20.2.2, unless that ASME requirement is modified by the conditions of a variance that pertains to the elevator in question, in which case, the information to be reported shall be the information required by the ASME provision as modified by the variance.

k. Any other information requested by Cal/OSHA regarding the replacement of the suspension means or fastenings.

3. In addition to the submission of the report to Cal/OSHA, the findings of any testing, failure analysis, or other engineering evaluations performed on any portion of the replaced suspension components, or other elevator components replaced in conjunction therewith, shall be submitted to Cal/OSHA referencing the information contained in item 2a above.

Occupational Safety and Health Standards Board

Business Meeting
Legislative Update

Prepared by the Department of Industrial Relations
Available on the DIR web page: Standards Board (OSHSB) 2026 Meeting Schedule

Legislative Update
Prepared October 6, 2026, for the October 15, 2026
Meeting of the Occupational Safety and Health Standards Board

AB-605 Employment: refineries: task force: staffing management plans. (2025-2026) – UPDATE (Muratsuchi)

Date	Action
09/20/26	Vetoed by Governor.
09/14/26	Enrolled and presented to the Governor at 1:30 p.m.
08/31/26	Senate amendments concurred in. To Engrossing and Enrolling.
08/30/26	From committee: That the Senate amendments be concurred in. (Ayes 4. Noes 2.) (August 30).
08/30/26	Joint Rule 62(a), file notice suspended.
08/30/26	Re-referred to Com. on L. & E. pursuant to Assembly Rule 77.2.
08/28/26	In Assembly. Concurrence in Senate amendments pending.
08/28/26	Read third time. Passed. Ordered to the Assembly. (Ayes 29. Noes 11.).
08/24/26	Read second time. Ordered to third reading.
08/21/26	Read third time and amended. Ordered to second reading.
08/17/26	Read second time. Ordered to third reading.
08/13/26	Read second time and amended. Ordered returned to second reading.
08/13/26	From committee: Amend, and do pass as amended. (Ayes 5. Noes 2.) (August 13).
08/03/26	In committee: Referred to APPR. suspense file.
07/02/26	Read second time and amended. Re-referred to Com. on APPR.
07/02/26	From committee: Amend, and do pass as amended and re-refer to Com. on APPR. (Ayes 4. Noes 2.) (July 1).

06/24/26	From committee: Do pass and re-refer to Com. on E.Q. (Ayes 4. Noes 1.) (June 24). Re-referred to Com. on E.Q.
06/15/26	Re-referred to Coms. on L., P.E. & R. and E.Q.
06/11/26	Re-referred to Com. on RLS.
06/11/26	Withdrawn from committee.
06/10/26	From committee chair, with author's amendments: Amend, and re-refer to committee. Read second time, amended, and re-referred to Com. on E.Q.
07/02/25	In committee: Set, first hearing. Hearing canceled at the request of author.
06/18/25	Referred to Coms. on E.Q. and TRANS..
06/05/25	In Senate. Read first time. To Com. on RLS. for assignment.
06/04/25	Read third time. Passed. Ordered to the Senate. (Ayes 78. Noes 0. Page 2055.)
05/27/25	Read second time. Ordered to third reading.
05/23/25	From committee: Do pass. (Ayes 14. Noes 0.) (May 23).
05/07/25	In committee: Set, first hearing. Referred to APPR. suspense file.
04/29/25	From committee: Do pass and re-refer to Com. on APPR. with recommendation: To Consent Calendar. (Ayes 14. Noes 0.) (April 28). Re-referred to Com. on APPR.
04/22/25	From committee: Do pass and re-refer to Com. on NAT. RES. (Ayes 15. Noes 0.) (April 21). Re-referred to Com. on NAT. RES.
04/21/25	Re-referred to Com. on TRANS.
04/10/25	From committee chair, with author's amendments: Amend, and re-refer to Com. on TRANS. Read second time and amended.
03/03/25	Referred to Coms. on TRANS. and NAT. RES.
02/14/25	From printer. May be heard in committee March 16.

02/13/25	Read first time. To print.

Summary:

AB 605, Muratsuchi. Employment: refineries: task force.

Existing law establishes an accidental release prevention program for the state. Under that law, stationary sources subject to the accidental release prevention program may be required to prepare and submit a risk management plan (RMP) to prevent accidental releases of certain substances. Existing law imposes criminal penalties upon a stationary source that knowingly violates the requirements of the accidental release prevention program.

This bill would state findings and declarations concerning refinery closures in California. The bill would establish the Refinery Safe Staffing Task Force to develop potential methods and strategies for ensuring maximum employee retention at refineries and addressing employment dislocations associated with oil, gas, and related industries, with membership, as specified, appointed and commencing service no later than January 1, 2028. The bill would require the task force, no later than June 1, 2029, to present to the Legislature and make available online to the public a report documenting a wide range of potential methods and strategies for ensuring maximum employee retention in the time period preceding refinery closure or long-term idling of a refinery, for ensuring safe operation in the event of understaffing, and for transitioning oil and gas workers into sectors that match their skills and experience. The bill would repeal the task force provisions on January 1, 2030.

Board staff is monitoring for potential impacts on Board operations.

AB-2137 Occupational safety and health: fabrication activities: slab solid surface products. (2025-2026) – NO UPDATE

(Chen)

Date	Action
05/14/26	In committee: Held under submission.
05/06/26	In committee: Set, first hearing. Referred to APPR. suspense file.
04/23/26	From committee: Do pass and re-refer to Com. on APPR. (Ayes 7. Noes 0.) (April 22). Re-referred to Com. on APPR.
04/16/26	Re-referred to Com. on L. & E.
04/15/26	From committee chair, with author's amendments: Amend, and re-refer to Com. on L. & E. Read second time and amended.
03/23/26	Re-referred to Com. on L. & E.
03/19/26	From committee chair, with author's amendments: Amend, and re-refer to Com. on L. & E. Read second time and amended.

03/19/26	Referred to Com. on L. & E.
02/19/26	From printer. May be heard in committee March 21.
02/18/26	Read first time. To print.

Summary:

AB 2137, as amended, Chen. Occupational safety and health: fabrication activities: slab solid surface products.

Existing law establishes the Occupational Safety and Health Standards Board within the Department of Industrial Relations to adopt occupational safety and health standards for the state, including standards dealing with exposure to harmful airborne contaminants. Existing law requires the Division of Occupational Safety and Health within the department to enforce all occupational safety and health standards, as specified.

Existing law imposes restrictions on specified high-exposure trigger tasks on artificial stone, as those terms are defined. Specifically, a person or entity engaged in high-exposure trigger tasks is prohibited from using dry methods, and is required to use effective wet methods when engaging in any high-exposure trigger tasks. Existing law requires the owner or operator of a fabrication shop, or any individual who will employ another individual to perform high-exposure trigger tasks in a fabrication shop, to ensure that an employee who will perform high-exposure tasks receives specified training and to annually attest to the division that these employees have been trained. Existing law requires the division to enforce these provisions by issuing a citation alleging a violation and a notice of civil penalty.

This bill would require, on or before January 1, 2028, the department to develop an application and certification process for fabrication shops to lawfully engage in slab solid surface product fabrication activities. The bill would authorize fabrication shops to engage in those fabrication activities during the pendency of the application development and certification process. The bill would require the department to develop an initial deposit process for fabrication shops to, during the pendency of the application development and certification process, submit a deposit fee for the application and certification subject to specified requirements, including that the deposit amount goes towards the initial certification fee collected by the department.

This bill would require, beginning July 1, 2028, the department to grant a 3-year certification to a fabrication shop that demonstrates satisfaction of specified criteria involving workplace safety conditions and precautions, and would authorize certification renewal, as specified. Among other conditions, the bill would establish certain regulatory fees in amounts to be determined and adjusted by the department, as specified, for the certification and renewal thereof. The bill would authorize the department to suspend or revoke a certification in certain cases, including for gross negligence, as specified. The bill would require the department, in consultation with the division and the State Department of Public Health, to track and keep a record of specified information on fabrication shops, including the number of citations issued to any of the fabrication shops for failure to comply with any temporary or future standards relating to respirable crystalline silica, as specified.

This bill would prohibit a person or entity, or an employee thereof, from engaging in fabrication activities, as defined, on slab solid surface products unless they conduct the fabrication activities at a fabrication shop that has submitted a valid initial deposit to the department, or, after July 1, 2028, has submitted an application for initial certification or renewal and the application is pending or has

a valid certification, as provided. The bill would require the division to enforce this prohibition by issuing a citation alleging a violation and a notice of civil penalty.

This bill would prohibit, beginning July 1, 2028, a person from supplying a slab solid surface product directly to a person, entity, or business engaged in fabrication activities on those products if the person, entity, or business does not have a valid, or pending application for, certification. The bill would require a person that supplies a slab solid surface product to a person, entity, or business engaged in fabrication activities on those products to verify that the person, entity, or business has a certification, or a pending application for certification, as specified. The bill would require a person that supplies a slab solid surface product to a person, entity, or business that is not engaged in fabrication activities to rely on written certification issued under penalty of perjury that, among other things, they will not directly engage in fabrication activities with the product without a certification. By expanding the scope of the crime of perjury, the bill would impose a state-mandated local program. The bill would require a person that seeks services that require fabrication activities and enters into a contract with a person, entity, or business to undertake fabrication activities to verify that the person, entity, or business has a valid certificate before engaging with and providing slab solid surface products to that person, entity, or business. The bill would require the division to enforce these requirements by issuing a citation alleging a violation and a notice of civil penalty.

The bill would establish the Slab Fabrication Activity Account in the Occupational Safety and Health Fund in the State Treasury, and would require all fees, penalties, or other moneys collected by the department under the bill and under the above-described provisions relating to high-exposure trigger tasks to be deposited into the account. The bill would authorize moneys in the account to be expended by the department, upon appropriation by the Legislature, for the purposes of administering the bill and other provisions related to silicosis risk exposure in fabrication shops.

The California Constitution requires the state to reimburse local agencies and school districts for certain costs mandated by the state. Statutory provisions establish procedures for making that reimbursement.

This bill would provide that no reimbursement is required by this act for a specified reason.

Board staff is monitoring for potential impacts on Board operations.

AB 2321, Occupational safety and health: investigations. (2025-2026) – UPDATED

(Ortega)

Date	Action
09/30/26	Chaptered by Secretary of State - Chapter 936, Statutes of 2026.
09/30/26	Approved by the Governor.
09/15/26	Enrolled and presented to the Governor at 3 p.m.
08/31/26	Senate amendments concurred in. To Engrossing and Enrolling.

08/30/26	In Assembly. Concurrence in Senate amendments pending.
08/30/26	Read third time. Passed. Ordered to the Assembly. (Ayes 29. Noes 10.).
08/28/26	Read second time. Ordered to third reading.
08/27/26	Read third time and amended. Ordered to second reading.
08/24/26	Read second time. Ordered to third reading.
08/21/26	Read third time and amended. Ordered to second reading.
08/17/26	Read second time. Ordered to third reading.
08/13/26	Read second time and amended. Ordered returned to second reading.
08/13/26	From committee: Amend, and do pass as amended. (Ayes 5. Noes 2.) (August 13).
08/03/26	In committee: Referred to APPR. suspense file.
06/29/26	Read second time and amended. Re-referred to Com. on APPR.
06/25/26	From committee: Amend and do pass as amended and re-refer to Com. on APPR. (Ayes 4. Noes 1.) (June 24).
06/16/26	From committee chair, with author's amendments: Amend, and re-refer to committee. Read second time, amended, and re-referred to Com. on L., P.E. & R.
06/10/26	Referred to Com. on L., P.E. & R.
05/27/26	In Senate. Read first time. To Com. on RLS. for assignment.
05/26/26	Read third time. Passed. Ordered to the Senate. (Ayes 55. Noes 17.)
05/19/26	Read second time. Ordered to third reading.

05/18/26	Read second time and amended. Ordered returned to second reading.
05/14/26	From committee: Amend, and do pass as amended. (Ayes 11. Noes 3.) (May 14).
04/29/26	In committee: Set, first hearing. Referred to APPR. suspense file.
04/09/26	From committee: Do pass and re-refer to Com. on APPR. (Ayes 5. Noes 0.) (April 8). Re-referred to Com. on APPR.
04/09/26	Coauthors revised.
03/17/26	Re-referred to Com. on L. & E.
03/16/26	From committee chair, with author's amendments: Amend, and re-refer to Com. on L. & E. Read second time and amended.
03/16/26	Referred to Com. on L. & E.
02/20/26	From printer. May be heard in committee March 22.
02/19/26	Read first time. To print.

Summary:

AB 2321, Ortega. Occupational safety and health: investigations.

(1) Existing law establishes the Department of Industrial Relations, which includes the Division of Occupational Safety and Health. Existing law requires the division to investigate the causes of any employment accident that is fatal to one or more employees or that results in a serious injury, illness, or exposure, except as specified. Existing law requires the chief of the division and all qualified inspectors and investigators authorized by the chief to have free access to any place of employment to investigate and inspect and sets forth various other duties related to investigation and inspection, as specified.

This bill would make it a misdemeanor to willfully resist, prevent, impede, or interfere with the chief or their authorized representative in the performance of the above-described duties or to willfully violate an order of the court relating to those duties. By creating a new crime, this bill would impose a state-mandated local program.

Existing law makes it a public offense for any employer or any employee having direction, management, control, or custody of any employment, place of employment, or of any other employee who willfully violates any occupational safety or health standard, order, special order, if that violation caused death or permanent or prolonged impairment to the body of an employee, as specified.

This bill would additionally make it a public offense if that violation caused serious injury, illness, or exposure. By expanding the scope of an existing crime, this bill would impose a state-mandated local program.

(2) Existing law makes the Bureau of Investigations within the Division of Occupational Safety and Health responsible for directing accident investigations involving violations of laws, standards, and

orders in which there is a serious injury to 5 or more employees, death, or request for prosecution by a division representative. Existing law requires the bureau to review inspection reports involving a serious violation if there have been serious injuries to one to 4 employees or a serious exposure, and authorizes the bureau to investigate cases for the purpose of prosecution, as specified. Existing law requires the bureau to refer the results of investigations it is required to conduct to the appropriate prosecuting authority having jurisdiction for appropriate action unless it determines that there is legally insufficient evidence of a violation of the law.

This bill would revise and recast these requirements to, among other things, additionally require the bureau to investigate any accident in which there is a serious injury, illness, or exposure for which the division issues a citation for a willful violation. The bill would require the bureau to establish written policies and procedures for reviewing cases and deciding whether to investigate or refer them for prosecution. The bill would also require the division to establish a routine or automated process for transmitting information to the bureau about incidents with serious injuries, illnesses, or exposures so that the bureau can review them.

Existing law authorizes the department, upon the request of a county district attorney, to develop a protocol for the referral of cases that may involve criminal conduct to the appropriate prosecuting authority in lieu of or in cooperation with an investigation by the bureau.

This bill would require the division to immediately notify the appropriate prosecuting authority upon learning of an accident in which there is a serious injury, illness, or exposure to 5 or more employees, death, or request for prosecution by a division representative. The bill would delete the above-described provisions regarding developing a protocol and would instead authorize the bureau, upon request of an appropriate prosecuting authority, to refer cases that may involve criminal conduct to the appropriate prosecuting authority, as specified. The bill would require the bureau and the division, in cases accepted for investigation, to cooperate with the prosecuting authority.

Existing law requires the bureau to submit an annual report to the division on its activities.

This bill would additionally require the report to be submitted to the Legislature and to include information relating to certain cases involving a fatality that are referred by the bureau to the appropriate prosecuting authority, as specified. The bill would make the specifics of that information confidential.

(3) Existing law requires all information reported to or otherwise obtained by the Chief of the Division of Occupational Safety and Health or representatives of the chief in connection with any inspection or proceeding of the division that contains or that might reveal a trade secret to be considered confidential, except that this information may be disclosed to other officers or employees of the division concerned with carrying out the purposes of the division or when relevant in any proceeding of the division, as specified.

This bill would revise the above-described exception to also permit this information to be disclosed to law enforcement officers or prosecutors in any law enforcement investigation or prosecution.

Existing law requires the responding agency, whenever a state, county, or local fire or police agency is called to an accident involving an employee covered by the California Occupational Safety and Health Act of 1973 in which a serious injury or illness, or death occurs, to immediately notify the nearest division office. Existing law then requires the division to immediately notify the appropriate prosecuting authority of the accident.

This bill would expand this requirement to include an accident in which a serious exposure occurs. The bill would also require the responding agency to immediately notify the district attorney’s office

in the county where the accident occurred. The bill would additionally require the division to immediately notify the bureau, and the district attorney's office or other appropriate prosecuting authority, of the accident, whether the division received notification by the responding agency, the employer, or by other means. The bill would make other related and conforming changes to those provisions.

(4) Existing constitutional provisions require that a statute that limits the right of access to the meetings of public bodies or the writings of public officials and agencies be adopted with findings demonstrating the interest protected by the limitation and the need for protecting that interest.

This bill would make legislative findings to that effect.

(5) The California Constitution requires the state to reimburse local agencies and school districts for certain costs mandated by the state. Statutory provisions establish procedures for making that reimbursement.

This bill would provide that no reimbursement is required by this act for a specified reason.

Board staff is monitoring for potential impacts on Board operations.

SB-966 Refinery and chemical plants. (2025-2026) – NO UPDATE
(Gonzalez)

Date	Action
08/31/26	Ordered to inactive file on request of Assembly Member Aguiar-Curry
08/13/26	Read second time. Ordered to third reading.
08/13/26	From committee: Do pass. (Ayes 11. Noes 4.) (August 13).
08/13/26	Assembly Rule 63 suspended.
08/05/26	August 5 set for first hearing. Placed on suspense file.
06/25/26	From committee: Do pass and re-refer to Com. on APPR. (Ayes 5. Noes 2.) (June 24). Re-referred to Com. on APPR.
06/04/26	Referred to Com. on L. & E.
05/27/26	In Assembly. Read first time. Held at Desk.
05/27/26	Read third time. Passed. (Ayes 30. Noes 9.) Ordered to the Assembly.
05/14/26	Read second time. Ordered to third reading.
05/14/26	From committee: Do pass. (Ayes 5. Noes 2.) (May 14).

05/08/26	Set for hearing May 14.
05/04/26	May 4 hearing: Placed on APPR. suspense file.
04/24/26	Set for hearing May 4.
04/23/26	April 27 hearing postponed by committee.
04/17/26	Set for hearing April 27.
04/15/26	From committee: Do pass and re-refer to Com. on APPR. (Ayes 4. Noes 1.) (April 15). Re-referred to Com. on APPR.
04/09/26	Set for hearing April 15.
04/08/26	Re-referred to Com. on L., P.E. & R.
03/25/26	From committee with author's amendments. Read second time and amended. Re-referred to Com. on RLS.
02/11/26	Referred to Com. on RLS.
02/04/26	From printer. May be acted upon on or after March 6.
02/03/26	Introduced. Read first time. To Com. on RLS. for assignment. To print.

Summary:

SB 966, as amended, Gonzalez. Refinery and chemical plants.

Existing law, the California Refinery and Chemical Plant Worker Safety Act of 1990, requires the Occupational Safety and Health Standards Board and the Division of Occupational Safety and Health to promote worker safety through implementation of training and process safety management practices in refineries, chemical plants, and other appropriate facilities, including by adopting process safety management standards and regulations. The act defines “process safety management” and other terms for its purposes. The act also requires an employer to develop and maintain written safety information, emergency action plans, operating procedures, procedures to manage changes, and inspection and testing programs.

This bill would require an employer, in consultation with employees and employee representatives, to develop, implement, and maintain a written plan to effectively provide for employee participation in all process safety management elements. The bill would also require, on or before April 1, 2027, an employer, in consultation with employee and employee representatives, to develop and implement stop work procedures and procedures for reporting and responding to hazards, as specified. The bill would require an employer to document specific information relating to a partial or complete shut down of an operation or process and reports of hazards. The bill would provide how employees who are and who are not represented by an authorized collective bargaining agent participate in the development of these plans and procedures.

Board staff is monitoring for potential impacts on Board operations.

SB-1046 Occupational safety: transboundary pollution. (2025-2026) – UPDATE

(Blakespear/Padilla)

Date	Action
09/27/26	Chaptered by Secretary of State. Chapter 672, Statutes of 2026.
09/27/26	Approved by the Governor.
09/04/26	Enrolled and presented to the Governor at 2 p.m.
08/28/26	Assembly amendments concurred in. (Ayes 39. Noes 0.) Ordered to engrossing and enrolling.
08/27/26	Ordered to special consent calendar.
08/25/26	In Senate. Concurrence in Assembly amendments pending.
08/25/26	Read third time. Passed. Ordered to the Senate.
08/21/26	Ordered to third reading.
08/21/26	Read third time and amended.
08/21/26	Assembly Rule 69(b)(1) suspended.
08/13/26	Read second time. Ordered to third reading.
08/13/26	From committee: Do pass. (Ayes 15. Noes 0.) (August 13).
08/13/26	Assembly Rule 63 suspended.
07/01/26	July 1 set for first hearing. Placed on suspense file.
06/11/26	From committee: Do pass and re-refer to Com. on APPR. with recommendation: To consent calendar. (Ayes 7. Noes 0.) (June 10). Re-referred to Com. on APPR.
05/26/26	Referred to Com. on L. & E.
05/20/26	In Assembly. Read first time. Held at Desk.

05/20/26	Read third time. Passed. (Ayes 38. Noes 0.) Ordered to the Assembly.
05/14/26	Read second time. Ordered to third reading.
05/14/26	From committee: Do pass. (Ayes 7. Noes 0.) (May 14).
05/08/26	Set for hearing May 14.
04/20/26	April 20 hearing: Placed on APPR. suspense file.
04/14/26	Set for hearing April 20.
04/09/26	Read second time and amended. Re-referred to Com. on APPR.
04/08/26	From committee: Do pass as amended and re-refer to Com. on APPR. (Ayes 4. Noes 0.) (April 8).
03/26/26	Set for hearing April 8.
03/25/26	Re-referred to Com. on L., P.E. & R.
03/17/26	From committee with author's amendments. Read second time and amended. Re-referred to Com. on RLS.
02/18/26	Referred to Com. on RLS.
02/12/26	Referred to Com. on L. & E.
02/20/26	From printer. May be acted upon on or after March 14.
02/11/26	Introduced. Read first time. To Com. on RLS. for assignment. To print.

Summary:

SB 1046, Blakespear. Occupational safety: transboundary pollution.

Existing law, the California Occupational Safety and Health Act of 1973, exists for the purpose of assuring safe and healthful working conditions for all California workers by authorizing the enforcement of effective standards, assisting and encouraging employers to maintain safe and healthful working conditions, and providing for research, information, education, training, and enforcement in the field of occupational safety and health. Existing law establishes the Occupational Safety and Health Standards Board within the Department of Industrial Relations for the adoption of occupational safety and health standards and establishes the Division of Occupational Safety and Health in that department for the enforcement of those occupational safety and health standards, as prescribed.

This bill would require the division, on or before January 1, 2030, to propose to the standards

board, for its consideration and possible adoption, a standard that protects the health and safety of employees who risk high or prolonged exposure to transboundary pollution, as defined, in outdoor occupational environments, as specified. The bill would require the division to consider identifying an exposure threshold for hydrogen sulfide at which acute or chronic health effects occur to reference in the standards and may consider exposure thresholds for other relevant pollutants. The bill would authorize the division to develop the standard in consultation with other specified groups. The bill would authorize the standards board to adopt emergency regulations to implement these provisions.

Board staff is monitoring for potential impacts on Board operations.

H.R.86 NOSHA Act. (2025-2026) – NO UPDATE

(Biggs)

Date	Action
01/03/25	Referred to the House Committee on Education and Workforce.
01/03/25	Introduced in House

Summary:

H.R., as introduced, Biggs. NOSHA Act.

This bill abolishes the Occupational Safety and Health Administration (OSHA) and its functions. OSHA, which is part of the Department of Labor, sets and enforces workplace safety and health standards and provides related training, outreach, education, and assistance.

Board staff is monitoring for potential impacts on Board operations.

H.R.5437 Protection of Lawful Commerce in Stone Slab Products Act. (2025-2026) –NO UPDATE

(McClintock/Biggs)

Date	Action
06/03/26	Ordered to be Reported (Amended) by the Yeas and Nays: 16 - 7. Action By: Committee on the Judiciary
06/03/26	Committee Consideration and Mark-up Session Held
09/17/25	Referred to the House Committee on the Judiciary

09/17/25	Introduced in House

Summary:

H.R., as introduced, McClintock and Biggs. Protection of Lawful Commerce in Stone Slab Products Act.

To prohibit civil actions brought against a manufacturer or seller of a stone slab product for harm resulting from the alteration of such a product by a fabricator, and for other purposes.

Board staff is monitoring for potential impacts on Board operations.

H.R.6213 Heat Workforce Standards Act of 2025 (2025-2026) – NO UPDATE

(Messmer)

Date	Action
07/21/26	Ordered to be Reported (Amended) by the Yeas and Nays: 18 - 15.
07/21/26	Committee Consideration and Mark-up Session Held
11/20/25	Referred to the House Committee on Education and Workforce
11/20/25	Introduced in House

Summary:

H.R., as introduced, Messmer. Heat Workforce Standards Act of 2025.

To prohibit the Secretary of Labor from finalizing, implementing, or enforcing a proposed standard with respect to heat injury and illness prevention.

Board staff is monitoring for potential impacts on Board operations.